



**Model Number**


**VL18LL-M/40a/118/128**

Fiber optic sensor  
with 4-pin, M12 x 1 connector


**Features**

- Strong metallic housing in cylindrical shape M18 x 1
- Degree of protection IP67
- Not sensitive to ambient light, even with switched energy saving lamps
- Multiple device installation possible, no mutual interference (no cross-talk)
- M12 plug connection
- Protection class 2


**Dimensions**

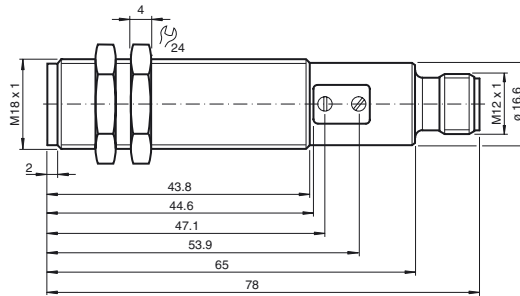

**Electrical connection**

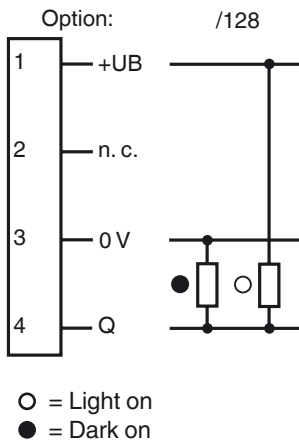

**Pinout**



Release date: 2019-11-25 10:13 Date of issue: 2019-11-25 801646\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

**Technical data****General specifications**

Sensor range	up to 70 mm (LMR 18-3,2-1,0-K4)
Detection range	up to 300 mm (LME 18-2,3-0,5-K3)
Light source	LED, 650 nm visible red light
Light type	modulated visible red light
Angle of divergence	26 °
Optical face	frontal
Ambient light limit	30000 Lux
Hysteresis	H < 15 %

**Functional safety related parameters**

MTTF <sub>d</sub>	700 a
Mission Time (T <sub>M</sub> )	20 a
Diagnostic Coverage (DC)	0 %

**Indicators/operating means**

Operation indicator	LED green, flashes in case of short-circuit
Function indicator	LED yellow, lights up with receiver lit
Control elements	Sensitivity adjuster, light/dark switch

**Electrical specifications**

Operating voltage	U <sub>B</sub>	10 ... 30 V DC , class 2
Ripple		10 %
No-load supply current	I <sub>0</sub>	< 35 mA
Protection class		II , rated voltage ≤ 50 V AC with pollution degree 1-2 according to IEC 60664-1

**Output**

Switching type	light/dark on, switchable	
Signal output	Push-pull (4 in 1) output short-circuit protected overvoltage protected	
Switching voltage	30 V DC	
Switching current	max. 200 mA	
Voltage drop	U <sub>d</sub>	≤ 2.5 V DC
Switching frequency	f	500 Hz
Response time		1 ms

**Conformity**

Product standard	EN 60947-5-2
------------------	--------------

**Ambient conditions**

Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
Storage temperature	-30 ... 70 °C (-22 ... 158 °F)

**Mechanical specifications**

Degree of protection	IP67
Connection	M12 connector, 4-pin
Material	
Housing	brass, nickel-plated
Optical face	plastic
Mass	60 g

**Approvals and certificates**

UL approval	cULus Listed, Type 1 enclosure
CCC approval	CCC approval / marking not required for products rated ≤36 V

**Accessories****LMR 18-3,2-0,5-K1**

Glass fiber optic - diffuse with metal covering

**LCR 18-3,2-0,5-K5**

Glass fiber optic - diffuse with PVC covering

**LMR 18-3,2-0,5-K4**

Glass fiber optic - diffuse with metal covering

**LME 18-2,3-0,5-K1**

Glass fiber optic - thru-beam with metal covering

**LME 18-2,3-0,5-K3**

Glass fiber optic - thru-beam with metal covering

**LME 18-2,3-0,5-K5**

Glass fiber optic - thru-beam with metal covering

**LSE 18-2,3-0,5-K9**

Glass fiber optic - thru-beam with silicon covering

**LME 18-1,9-0,5-K9**

Glass fiber optic - thru-beam with metal covering

Other suitable accessories can be found at [www.pepperl-fuchs.com](http://www.pepperl-fuchs.com)



# SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

# [www.scatts.co.uk](http://www.scatts.co.uk)