

Features

- 1-channel isolated barrier
- 24 V DC supply (loop powered)
- Current input/output 4 mA ... 20 mA
- Accuracy 0.1 %
- Entity parameter $I_O/I_{SC} = 0$ mA


Function

This isolated barrier is used for intrinsic safety applications. It is loop-powered and repeats a 4 mA ... 20 mA signal from a current source inside a hazardous area to the safe area (It does not provide power for transmitters inside the hazardous area.).


The 25.2 V, 0 mA entity parameters make it easy to design intrinsically safe systems.

Assembly

Front view

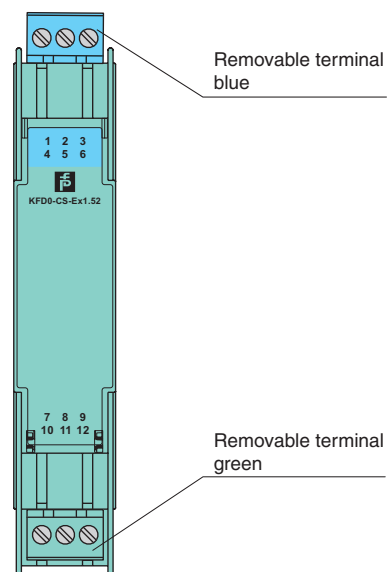

Connection

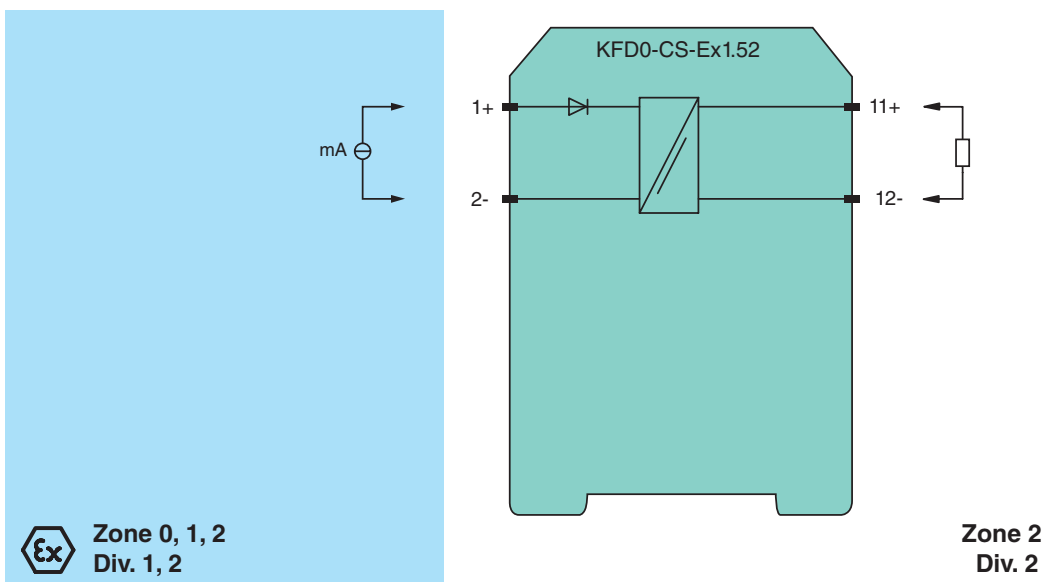

Release date 2019-11-25 12:03 Date of issue 2019-11-25 183892_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

General specifications		
Signal type		Analog input
Supply		
Rated voltage	U_r	loop powered
Power dissipation		75 mW
Power consumption		500 mW
Control circuit		
Connection		terminals 11+, 12-
Voltage		4 ... 24 V DC for 4 V < U_{in} < 24 V: $0.97 \times U_{in} - (85 \times \text{current in A}) - 1.3$
Current		4 ... 20 mA
Field circuit		
Connection		terminals 1+, 2-
Transmission range		current: 4 ... 24 mA voltage: 4 ... 24 V DC
Transfer characteristics		
Accuracy		0.1 %
Deviation		
After calibration		$\pm 20 \mu\text{A}$ incl. calibration, linearity, hysteresis and load fluctuations at 20 °C (68 °F), $U_{in} \leq 20 \text{ V}$ $+20 \mu\text{A}/-50 \mu\text{A}$ incl. calibration, linearity, hysteresis and load fluctuations at 20 °C (68 °F), $20 \text{ V} < U_{in} < 24 \text{ V}$
Influence of ambient temperature		$\pm 1 \mu\text{A}/\text{K}$ (0 ... 50 °C (32 ... 122 °F)), $U_{in} \leq 12 \text{ V}$ $\pm 2 \mu\text{A}/\text{K}$ (0 ... 60 °C (32 ... 140 °F)), $U_{in} \leq 18 \text{ V}$ $\pm 5 \mu\text{A}/\text{K}$ (-20 ... 60 °C (-4 ... 140 °F)), $U_{in} \leq 24 \text{ V}$
Rise time		$\leq 10 \text{ ms}$ at 4 ... 20 mA and 250 Ω load
Galvanic isolation		
Input/Output		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Indicators/settings		
Labeling		space for labeling at the front
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
Conformity		
Electromagnetic compatibility		NE 21:2011
Degree of protection		IEC 60529:2001
Protection against electrical shock		UL 61010-1:2012
Ambient conditions		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
Mechanical specifications		
Degree of protection		IP20
Connection		screw terminals
Mass		approx. 100 g
Dimensions		20 x 119 x 115 mm (0.8 x 4.7 x 4.5 inch) , housing type B2
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
Data for application in connection with hazardous areas		
EU-type examination certificate		BASEEFA 03 ATEX 0141
Marking		Ex II (1)GD, I (M1) [Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I (-20 °C $\leq T_{amb} \leq 60$ °C) , [circuit(s) in zone 0/1/2]
Voltage	U_o	25.2 V DC
Current	I_o	0 mA
Type of protection [Ex ia]		
Output		
Maximum safe voltage	U_m	253 V $_{eff}$ (Attention! The rated voltage can be lower.)
Certificate		TÜV 99 ATEX 1499 X
Marking		Ex II 3G Ex nA II T4 [device in zone 2]
Galvanic isolation		
Input/Output		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Directive conformity		
Directive 2014/34/EU		EN 60079-0:2012+A11:2013 , EN 60079-11:2012 , EN 60079-15:2010
International approvals		
FM approval		
Control drawing		116-0129
UL approval		
Control drawing		116-0173 (cULus)
IECEX approval		
IECEX certificate		IECEX BAS 08.0059
IECEX marking		[Ex ia Ga] IIC , [Ex ia Da] IIIC , [Ex ia Ma] I

Release date 2019-11-25 12:03 Date of issue 2019-11-25 183892_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

General information	
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk