

Features

- 2-channel isolated barrier
- 24 V DC supply (loop powered)
- SMART fire alarm input
- Current input 1 mA ... 20 mA
- Up to SIL 3 acc. to IEC 61508

Function

This isolated barrier is used for intrinsic safety applications. It provides control and signal transfer for SMART compatible fire and smoke alarm transmitters inside hazardous areas.


Digital signals may be superimposed on the analog values in the hazardous or safe area and are transferred bidirectionally.

The fall time of the digital signal must be less than 50 µs, the current in the hazardous area must be bigger than 1 mA.

Since this isolator is loop-powered, use the technical data to verify that proper voltage is available to the field devices.



Assembly

Front view

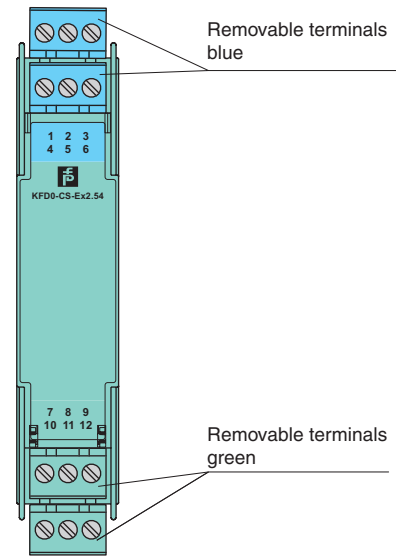

SIL 3

Connection

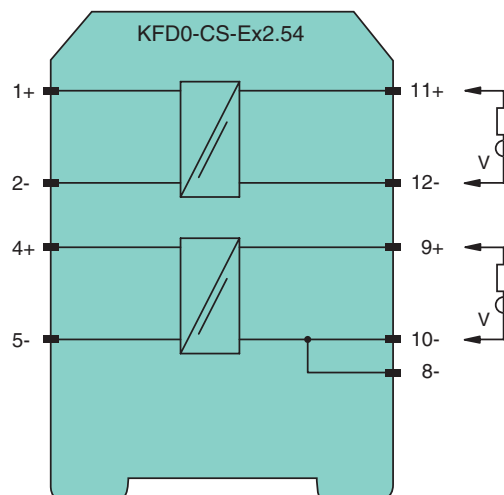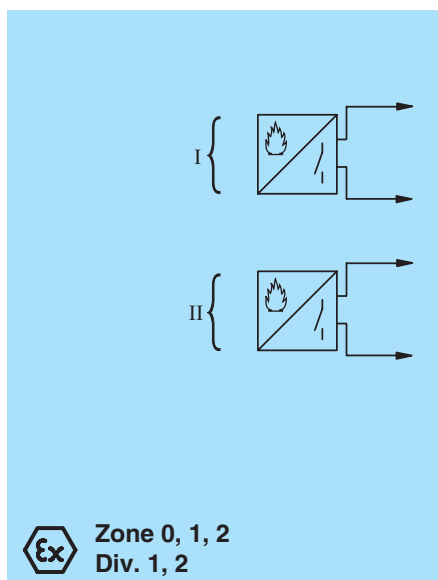

**Zone 2
Div. 2**

Release date 2019-11-25 12:03 Date of issue 2019-11-25 207804_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

General specifications		
Signal type		Analog input
Functional safety related parameters		
Safety Integrity Level (SIL)		SIL 3
Supply		
Rated voltage	U_r	loop powered
Power dissipation		$< 0.2 \text{ W}$ for $U_{in} = 24 \text{ V}$, $I_o = 20 \text{ mA}$
Control circuit		
Connection		terminals 11+, 12-; 9+, 10-, 8-
Voltage		0 ... 24 V for $4 \text{ V} \leq U_e \leq 24 \text{ V}$: $\geq U_e - (0.41 \times \text{input current in mA}) - 0.5$
Current		0 ... 20 mA
Field circuit		
Connection		terminals 1+, 2-; 4+, 5-
Short-circuit current		$\leq 65 \text{ mA}$
Transmission range		current: 1 ... 20 mA voltage: 4 ... 20 V DC / 0 ... 6 V _{SS} AC
Transfer characteristics		
Deviation		
After calibration		$\leq 3.5 \text{ mA}$ current loss at 20 mA load current
Influence of ambient temperature		$\pm 20 \mu\text{A} / \text{K}$
Rise time/fall time		$\leq 50 \mu\text{s}$ (load current $\geq 1 \text{ mA}$)
Galvanic isolation		
Input/Output		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Indicators/settings		
Labeling		space for labeling at the front
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
Conformity		
Electromagnetic compatibility		NE 21:2006
Degree of protection		IEC 60529:2001
Protection against electrical shock		UL 61010-1
Ambient conditions		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
Mechanical specifications		
Degree of protection		IP20
Connection		screw terminals
Mass		approx. 100 g
Dimensions		20 x 107 x 115 mm (0.8 x 4.2 x 4.5 inch) , housing type B1
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
Data for application in connection with hazardous areas		
EU-type examination certificate		BAS 00 ATEX 7087
Marking		Ex II (1)GD, I (M1) [Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I (-20 °C $\leq T_{amb} \leq 60$ °C) [circuit(s) in zone 0/1/2]
Voltage	U_o	28 V
Current	I_o	93 mA
Power	P_o	653 mW
Supply		
Maximum safe voltage	U_m	253 V (Attention! The rated voltage can be lower.)
Type of protection [Ex ia]		
Certificate		TÜV 99 ATEX 1499 X
Marking		Ex II 3G Ex nA II T4 Gc [device in zone 2]
Galvanic isolation		
Input/Output		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Directive conformity		
Directive 2014/34/EU		EN 60079-0:2012+A11:2013 , EN 60079-11:2012 , EN 60079-15:2010
International approvals		
FM approval		
Control drawing		116-0129 (cFMus)
UL approval		
Control drawing		116-0348 (cULus)
IECEX approval		
IECEX certificate		IECEX BAS 08.0079 IECEX BAS 10.0007X

Release date 2019-11-25 12:03 Date of issue 2019-11-25 207804_eng.xml

IECEx marking

[Ex ia Ga] IIC , [Ex ia Da] IIIC , [Ex ia Ma] I
Ex nA II T4 Gc**General information**

Supplementary information

Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com.



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk