

Features

- 1-channel isolated barrier
- 24 V DC supply (Power Rail)
- Current input 4 mA ... 20 mA
- Current output 4 mA ... 20 mA
- Current output up to 700 Ω load
- I/P and valve positioners
- Accuracy 0.05 %
- Up to SIL 2 acc. to IEC 61508


Function

This isolated barrier is used for intrinsic safety applications. It drives a 4 mA ... 20 mA signal from the safe area to I/P converters, electrical valves, and positioners located in the hazardous area.


An open or high resistance field circuit presents a similar resistance to the control side to allow line fault detection by control system.

The voltage drop at the current input (terminals 7-, 8+) is lower than 2.5 V equivalent to an input resistance of 125 Ω at 20 mA.

Assembly

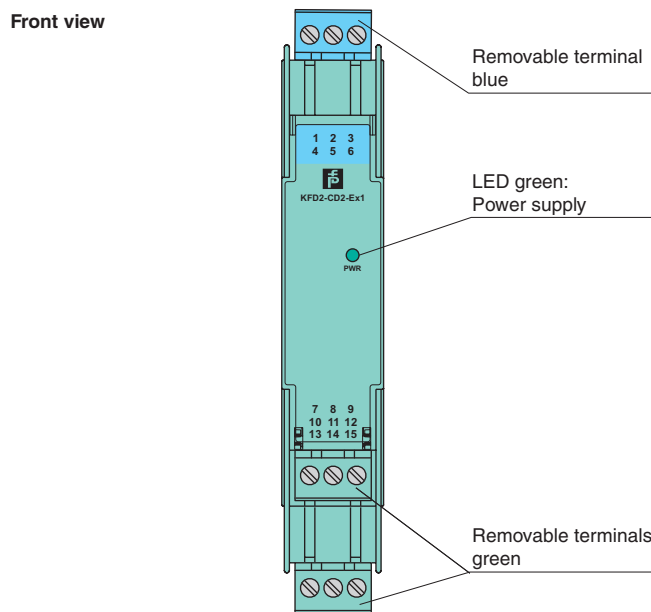

Connection

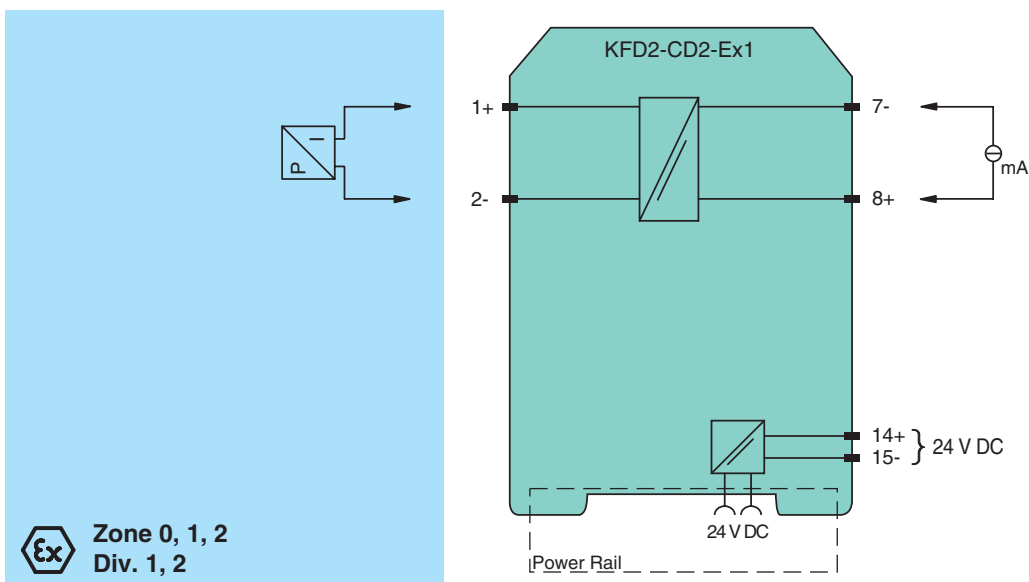

Release date 2019-06-27 14:27 Date of issue 2019-06-27 12:52:3_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

General specifications		
Signal type		Analog output
Functional safety related parameters		
Safety Integrity Level (SIL)		SIL 2
Supply		
Connection		Power Rail or terminals 14+, 15-
Rated voltage	U_r	20 ... 35 V DC
Ripple		within the supply tolerance
Power dissipation		0.8 W
Power consumption		1 W at 20 mA
Input		
Connection side		control side
Connection		terminals 7-, 8+
Voltage drop		approx. 2.5 V or internal resistance 125 Ω at 20 mA
Input resistance		≤ 2.5 V, equivalent to 125 Ω at 20 mA
Ripple		50 μA_{rms}
Current		4 ... 20 mA limited to approx. 24 mA
Output		
Connection side		field side
Connection		terminals 1+, 2-
Current		4 ... 20 mA
Load		0 ... 700 Ω
Voltage		≥ 14 V at 20 mA
Transfer characteristics		
Accuracy		0.05 %
Deviation		
After calibration		at 20 °C (68 °F): ≤ 10 μA incl. non-linearity, calibration, hysteresis, supply and load changes
Influence of ambient temperature		≤ 1 $\mu A/K$
Rise time		< 100 μs , 10 ... 90 % step change
Galvanic isolation		
Input/power supply		functional insulation, rated insulation voltage 50 V AC
Indicators/settings		
Display elements		LED
Labeling		space for labeling at the front
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
Conformity		
Electromagnetic compatibility		NE 21:2011
Degree of protection		IEC 60529:2001
Protection against electrical shock		UL 61010-1:2004
Ambient conditions		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
Mechanical specifications		
Degree of protection		IP20
Connection		screw terminals
Mass		approx. 100 g
Dimensions		20 x 107 x 115 mm (0.8 x 4.2 x 4.5 inch) , housing type B1
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
Data for application in connection with hazardous areas		
EU-type examination certificate		BAS 00 ATEX 7240
Marking		Ex II (1)G [Ex ia Ga] IIC , Ex II (1)D [Ex ia Da] IIIC , Ex I (M1) [Ex ia Ma] I
Output		[Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I
Voltage	U_o	25.2 V
Current	I_o	93 mA
Power	P_o	585 mW
Supply		
Maximum safe voltage	U_m	250 V rms (Attention! The rated voltage can be lower.)
Type of protection [EEx ia]		
Certificate		TÜV 99 ATEX 1499 X
Marking		Ex II 3G Ex nA II T4
Galvanic isolation		
Input/Output		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Output/power supply		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V

Release date 2019-06-27 14:27 Date of issue 2019-06-27 12:52:23_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Directive conformity	
Directive 2014/34/EU	EN 60079-0:2012+A11:2013 , EN 60079-11:2012 , EN 60079-15:2010
International approvals	
UL approval	
Control drawing	116-0173 (cULus)
IECEX approval	IECEX BAS 04.0014
Approved for	[Zone 0] [Ex ia] IIC, [Ex iaD], [Ex ia] I
General information	
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .
Accessories	
Optional accessories	<ul style="list-style-type: none"> - power feed module KFD2-EB2(.R4A.B)(.SP) - universal power rail UPR-03(-M)(-S) - profile rail K-DUCT-BU(-UPR-03)



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk