

**Features**

- 2-channel isolated barrier
- 24 V DC supply (Power Rail)
- Current input 0 mA ... 20 mA
- Current output 0 mA ... 20 mA
- Current output up to 700 Ω load
- I/P and valve positioners
- Accuracy 0.05 %
- Up to SIL 2 acc. to IEC 61508

**Function**

This isolated barrier is used for intrinsic safety applications.


It drives a 4 mA ... 20 mA signal from the safe area to I/P converters, electrical valves, and positioners located in the hazardous area.

An open or high resistance field circuit presents a similar resistance to the control side to allow line fault detection by control system.

The voltage drop at the current input (terminals 7-, 8+ and 10-, 11+) is lower than 2.5 V equivalent to an input resistance of 125 Ω at 20 mA.


**Assembly**

Front view

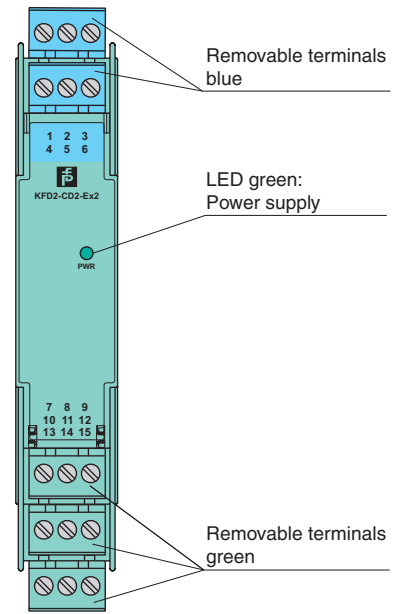

**SIL 2**

**Connection**

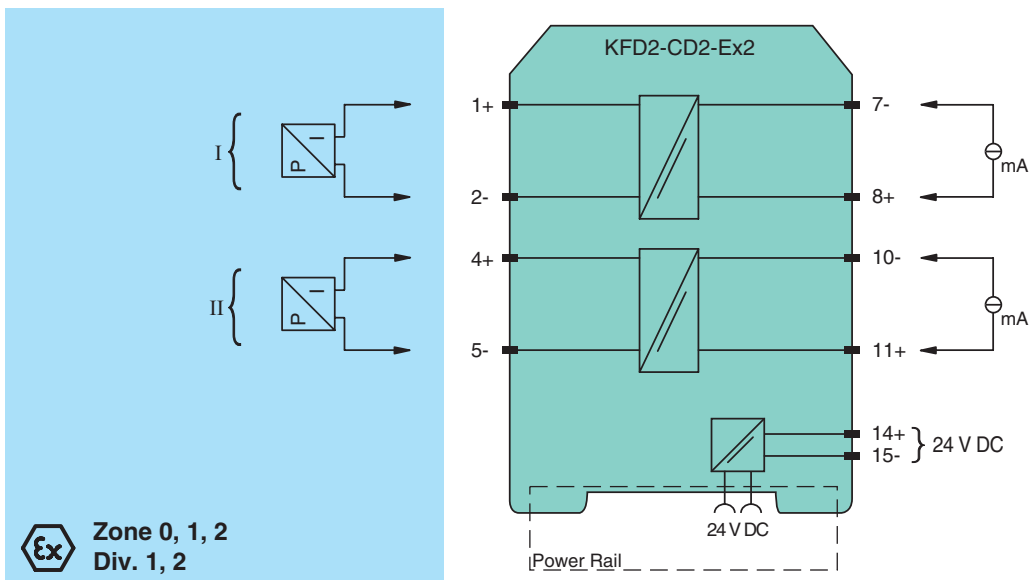

Release date 2019-06-27 14:27 Date of issue 2019-06-27 12:52 eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

<b>General specifications</b>		
Signal type		Analog output
<b>Functional safety related parameters</b>		
Safety Integrity Level (SIL)		SIL 2
<b>Supply</b>		
Connection		Power Rail or terminals 14+, 15-
Rated voltage	$U_r$	20 ... 35 V DC
Ripple		within the supply tolerance
Power dissipation		1.4 W
Power consumption		1.8 W at 20 mA
<b>Input</b>		
Connection side		control side
Connection		terminals 7-, 8+; 10-, 11+
Voltage drop		approx. 2.5 V or internal resistance 125 $\Omega$ at 20 mA
Input resistance		$\leq 2.5$ V, equivalent to 125 $\Omega$ at 20 mA
Ripple		50 $\mu A_{rms}$
Current		4 ... 20 mA limited to approx. 25 mA
<b>Output</b>		
Connection side		field side
Connection		terminals 1+, 2-; 4+, 5-
Current		4 ... 20 mA
Load		0 ... 700 $\Omega$
Voltage		$\geq 14$ V at 20 mA
<b>Transfer characteristics</b>		
Accuracy		0.05 %
Deviation		
After calibration		at 20 °C (68 °F): $\leq 10$ $\mu A$ incl. non-linearity, calibration, hysteresis, supply and load changes
Influence of ambient temperature		$\leq 1$ $\mu A/K$
Rise time		$< 100$ $\mu s$ , 10 ... 90 % step change
<b>Galvanic isolation</b>		
Input/power supply		functional insulation, rated insulation voltage 50 V AC
Input/input		functional insulation, rated insulation voltage 50 V AC
<b>Indicators/settings</b>		
Display elements		LED
Labeling		space for labeling at the front
<b>Directive conformity</b>		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
<b>Conformity</b>		
Electromagnetic compatibility		NE 21:2011
Degree of protection		IEC 60529:2001
Protection against electrical shock		UL 61010-1:2004
<b>Ambient conditions</b>		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
<b>Mechanical specifications</b>		
Degree of protection		IP20
Connection		screw terminals
Mass		approx. 150 g
Dimensions		20 x 119 x 115 mm (0.8 x 4.7 x 4.5 inch) , housing type B2
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
<b>Data for application in connection with hazardous areas</b>		
EU-type examination certificate		BAS 00 ATEX 7240
Marking		II (1)G [Ex ia Ga] IIC ,  II (1)D [Ex ia Da] IIIC ,  I (M1) [Ex ia Ma] I
Output		[Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I
Voltage	$U_o$	25.2 V
Current	$I_o$	93 mA
Power	$P_o$	585 mW
Supply		
Maximum safe voltage	$U_m$	250 V $rms$ (Attention! The rated voltage can be lower.)
Type of protection [EEx ia]		
Certificate		TÜV 99 ATEX 1499 X
Marking		II 3G Ex nA II T4 [device in zone 2]
Galvanic isolation		
Input/Output		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V

Release date 2019-06-27 14:27 Date of issue 2019-06-27 123522\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Output/power supply	safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Directive conformity	
Directive 2014/34/EU	EN 60079-0:2012+A11:2013 , EN 60079-11:2012 , EN 60079-15:2010
<b>International approvals</b>	
UL approval	
Control drawing	116-0173 (cULus)
IECEx approval	IECEx BAS 04.0014
Approved for	[Zone 0] [Ex ia] IIC, [Ex iaD], [Ex ia] I
<b>General information</b>	
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .
<b>Accessories</b>	
Optional accessories	<ul style="list-style-type: none"> <li>- power feed module KFD2-EB2(.R4A.B)(.SP)</li> <li>- universal power rail UPR-03(-M)(-S)</li> <li>- profile rail K-DUCT-BU(-UPR-03)</li> </ul>



# SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

# [www.scatts.co.uk](http://www.scatts.co.uk)