

Features

- 1-channel isolated barrier
- 24 V DC supply (Power Rail)
- Input 2-wire and 3-wire transmitters and 2-wire current sources
- Output 0/4 mA ... 20 mA
- 2 relay contact outputs
- Adjustable energized/de-energized delay
- Programmable high/low alarm
- Linearization function (max 20 points)
- Line fault detection (LFD)
- Up to SIL 2 acc. to IEC 61508/IEC 61511

Function

This isolated barrier is used for intrinsic safety applications. The device supplies 2-wire and 3-wire transmitters, and can also be used with current sources.

Two relays and an active 0/4 mA ... 20 mA current source are available as outputs. The relay contacts and the current output can be integrated in security-relevant circuits. The current output is easily scaled.

On the display the measured value can be indicated in various physical units.


The device is easily configured by the use of keypad or with the PACTware configuration software.

The input has a line fault detection.


A fault is signaled by LEDs acc. to NAMUR NE44 and a separate collective error message output.

For additional information, refer to the manual and www.pepperl-fuchs.com.

Assembly

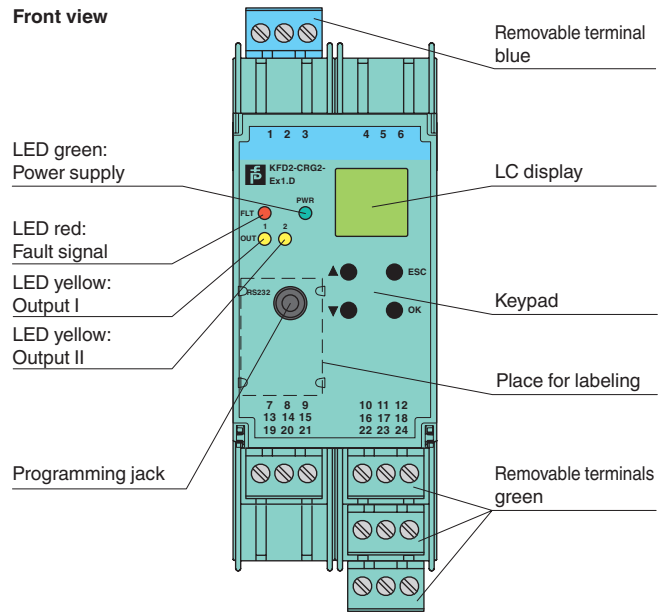

Connection


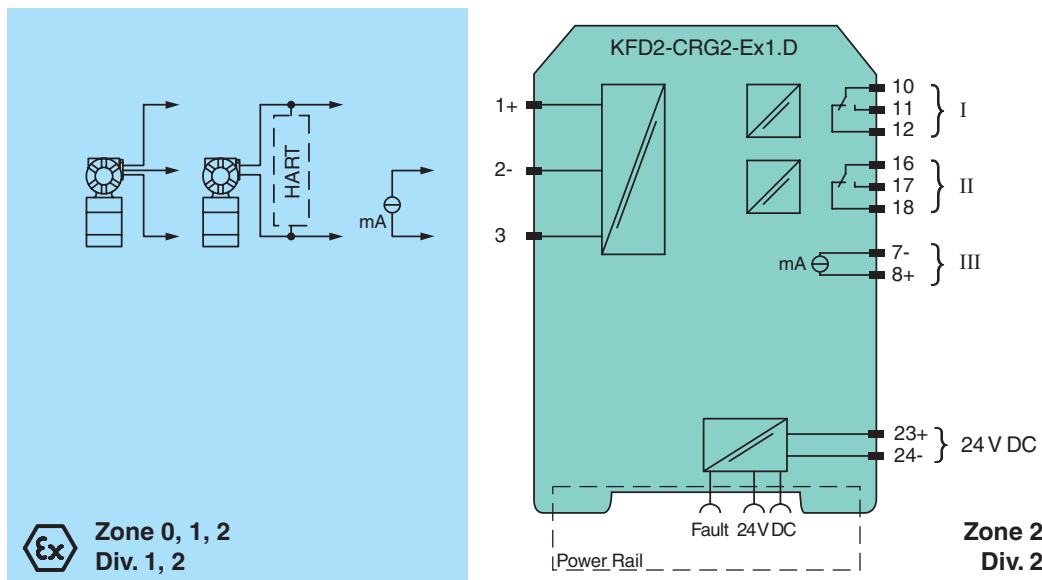


Release date 2018-08-15 10:04 Date of issue 2018-08-15 255620_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

General specifications		
Signal type		Analog input
Functional safety related parameters		
Safety Integrity Level (SIL)		SIL 2
Supply		
Connection		Power Rail or terminals 23+, 24-
Rated voltage	U_r	20 ... 30 V DC
Rated current	I_r	approx. 130 mA
Power dissipation		2 W
Power consumption		2.5 W
Interface		
Programming interface		programming socket
Input		
Connection side		field side
Connection		terminals 1, 2, 3
Input I		
Input signal		0/4 ... 20 mA
Available voltage		≥ 15 V at 20 mA
Open circuit voltage/short-circuit current		24 V / 33 mA
Input resistance		45 Ω (terminals 2, 3)
Line fault detection		breakage I < 0.2 mA; short-circuit I > 22 mA
Output		
Connection side		control side
Connection		output I: terminals 10, 11, 12 output II: terminals 16, 17, 18 output III: terminals 8+, 7-
Output signal		0 ... 20 mA or 4 ... 20 mA
Output I, II		signal, relay
Contact loading		250 V AC / 2 A / $\cos \phi \geq 0.7$; 40 DC / 2 A
Mechanical life		5×10^7 switching cycles
Output III		Signal, analog
Current range		0 ... 20 mA or 4 ... 20 mA
Open loop voltage		≤ 24 V DC
Load		≤ 650 Ω
Fault signal		downscale I ≤ 3.6 mA, upscale I ≥ 21 mA (acc. NAMUR NE43)
Energized/De-energized delay		0 ... 250 s , adjustable
Transfer characteristics		
Input I		
Accuracy		< 30 μA
Influence of ambient temperature		0.003 %/K (30 ppm)
Output I, II		
Response delay		≤ 200 ms at bounce from 0 ... 20 mA
Output III		
Resolution		≤ 10 μA
Accuracy		< 20 μA
Influence of ambient temperature		0.005 %/K (50 ppm)
Reaction time		< 650 ms at bounce from 0 ... 20 mA at the input, 90 % of output full-scale value
Galvanic isolation		
Input/Other circuits		reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V _{eff}
Output I, II/other circuits		reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V _{eff}
Mutual output I, II, III		reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V _{eff}
Output III/power supply and collective error		functional insulation acc. to IEC 62103, rated insulation voltage 50 V _{eff}
Interface/power supply and collective error		functional insulation acc. to IEC 62103, rated insulation voltage 50 V _{eff}
Indicators/settings		
Display elements		LEDs , display
Control elements		Control panel
Configuration		via operating buttons via PACTware
Labeling		space for labeling at the front
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)

Release date 2018-08-15 10:04 Date of issue 2018-08-15 255620_eng.xml


Low voltage		
Directive 2014/35/EU		EN 61010-1:2010
Conformity		
Electromagnetic compatibility		NE 21:2006
Degree of protection		IEC 60529:2001
Ambient conditions		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
Mechanical specifications		
Degree of protection		IP20
Connection		screw terminals
Mass		300 g
Dimensions		40 x 119 x 115 mm (1.6 x 4.7 x 4.5 inch) , housing type C3
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
Data for application in connection with hazardous areas		
EU-Type Examination Certificate		TÜV 01 ATEX 1701
Marking		 II (1)G [Ex ia Ga] IIC  II (1)D [Ex ia Da] IIIC  I (M1) [Ex ia Ma] I
Input		Ex ia
Supply		
Maximum safe voltage	U_m	40 V DC (Attention! The rated voltage can be lower.)
Equipment		terminals 1+, 3-
Voltage	U_o	25.8 V
Current	I_o	93 mA
Power	P_o	0.603 W
Equipment		terminals 2-, 3
Voltage	U_i	< 30 V
Current	I_i	115 mA
Voltage	U_o	5 V
Current	I_o	0.3 mA
Power	P_o	0.3 mW
Equipment		terminals 1+, 2 / 3-
Voltage	U_o	25.8 V
Current	I_o	112 mA
Power	P_o	720 mW
Output I, II		terminals 10, 11, 12; 16, 17, 18 non-intrinsically safe
Maximum safe voltage	U_m	253 V AC / 40 V DC (Attention! U_m is no rated voltage.)
Contact loading		253 V AC/2 A/cos ϕ > 0.7; 40 V DC/2 A resistive load (TÜV 01 ATEX 1701)
Output III		terminals 8+, 7- non-intrinsically safe
Maximum safe voltage	U_m U_m	40 V (Attention! The rated voltage can be lower.)
Interface		RS 232
Maximum safe voltage	U_m	40 V (Attention! The rated voltage can be lower.) , RS 232
Certificate		TÜV 02 ATEX 1885 X
Marking		 II 3G Ex nA nC IIC T4
Output I, II		50 V AC/2 A/cos ϕ > 0.7; 40 V DC/1 A resistive load
Galvanic isolation		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Directive conformity		EN 60079-0:2012+A11:2013 , EN 60079-11:2012 , EN 60079-15:2010
International approvals		
FM approval		16-554FM-12 (cFMus)
UL approval		E223772
IECEX approval		IECEX TUN 09.0007
Approved for		[Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I
General information		
Supplementary information		Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .
Accessories		

Release date 2018-08-15 10:04 Date of issue 2018-08-15 255620_eng.xml

Optional accessories

- power feed module KFD2-EB2(.R4A.B)(.SP)
- universal power rail UPR-03(-M)(-S)
- profile rail K-DUCT-BU(-UPR-03)
- FDT framework PACTware 4.1
- device type manager DTM Interface Technology
- adapter K-ADP-USB

Maximum Switching Power of Output Contacts

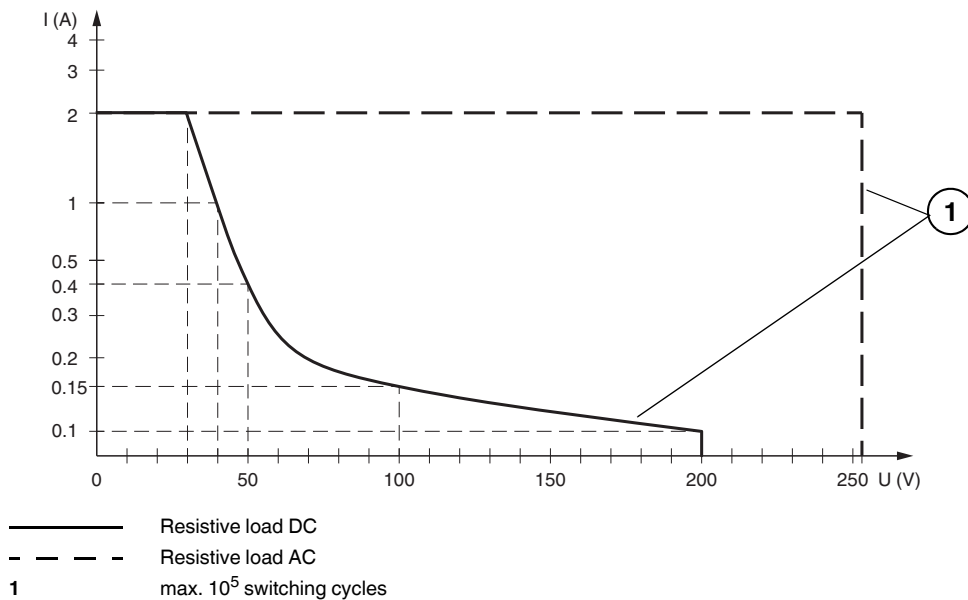



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk