

DNV·GL

Certificate No:
TAA00001WX
 Revision No:
1

TYPE APPROVAL CERTIFICATE

This is to certify:

That the Measurement Converter

with type designation(s)
K-System, Z-System

Issued to

Pepperl+Fuchs GmbH
Mannheim, Germany

is found to comply with

DNV GL rules for classification – Ships, offshore units, and high speed and light craft

Application :

Location classes:

Product(s) approved by this certificate is/are accepted for installation on all vessels classed by DNV GL.

Temperature D

Humidity B

Vibration A

EMC See product description on page 2

Enclosure Required protection according to DNV GL Rules shall be provided upon installation onboard.

Issued at **Hamburg** on **2018-07-27**

This Certificate is valid until **2023-07-09**.

DNV GL local station: **Augsburg**

for **DNV GL**

Approval Engineer: **Didier Girardin**

.....
Joannis Papanuskas
Head of Section

This Certificate is subject to terms and conditions overleaf. Any significant change in design or construction may render this Certificate invalid. The validity date relates to the Type Approval Certificate and not to the approval of equipment/systems installed.



Form code: TA 251

Revision: 2016-12

www.dnvgl.com

Page 1 of 5

© DNV GL 2014. DNV GL and the Horizon Graphic are trademarks of DNV GL AS.

Job Id: **262.1-000947-5**
 Certificate No: **TAA00001WX**
 Revision No: **1**

Product description

System measurement converter modules as listed below:

Accessories / Power feed module (EMC B)

UPR-03
 KFD2-EB2
 KFD2-EB2.R4A.B

Isolated Switch amplifier 24V DC Supply voltage (EMC A)

KCD2-SR-Ex1.LB
 KCD2-SR-Ex2
 KFD2-SH-Ex1.T
 KFD2-SH-Ex1.T.OP

Isolated Switch amplifier 24V DC Supply voltage (EMC B)

KFD2-SR2-Ex1.W
 KFD2-SR2-Ex1.W.LB
 KFD2-SR2-Ex2.W
 KFD2-SR2-Ex2.W.SM
 KFD2-SR2-Ex2.2S
 KFD2-SOT2-Ex1.LB.IO
 KFD2-SOT2-Ex2.IO

Isolated Switch amplifier 115/230 V AC Supply voltage (EMC B)

KFA5-SR2-Ex1.W
 KFA5-SR2-Ex1.W.LB
 KFA5-SR2-Ex2.W
 KFA5-SR2-Ex2.W.IR
 KFA6-SR2-Ex1.W
 KFA6-SR2-Ex1.W.LB
 KFA6-SR2-Ex2.W
 KFA6-SR2-Ex2.W.IR

Pulse converter units 48...253 V AC or 20...90 V DC Supply voltage (EMC B)

KFU8-CRG2-Ex1.D
 KFU8-GUT-Ex1.D
 KFU8-UFC-Ex1.D
 KFU8-UFT-Ex2.D

Temperature converter 24V DC Supply voltage (EMC B)

KFD2-UT2-1
 KFD2-UT2-1-1
 KFD2-UT2-2
 KFD2-UT2-2-1
 KFD2-UT2-Ex1
 KFD2-UT2-Ex1-1
 KFD2-UT2-Ex2
 KFD2-UT2-Ex2-1

Job Id: **262.1-000947-5**
 Certificate No: **TAA00001WX**
 Revision No: **1**

Transmitter Power Supply 24V DC Supply voltage (EMC A)

KCD2-STC-Ex1
 KCD2-STC-Ex1.ES
 KFD2-STC4-Ex1.ES
 KFD2-CR4-1
 KFD2-CR4-1.20
 KFD2-CR4-Ex1
 KFD2-CR4-Ex1.20
 KFD2-STC4-1
 KFD2-STC4-1-3
 KFD2-STC4-1.20
 KFD2-STC4-1.20-3
 KFD2-STC4-Ex1
 KFD2-STC4-Ex1.H
 KFD2-STC4-Ex1-Y1
 KFD2-STC4-Ex1-Y2
 KFD2-STC4-Ex1.20
 KFD2-STC4-Ex1.20.H
 KFD2-STC4-Ex1.20-Y1
 KFD2-STV4-1-1
 KFD2-STV4-Ex1-1
 KFD2-STV4-Ex1-1-Y1
 KFD2-STV4-Ex1-2
 KFD2-STC4-Ex1.20-1
 KFD2-STC4-Ex1.20-2
 KFD2-CR4-2
 KFD2-CR4-Ex2
 KFD2-STC4-2
 KFD2-STC4-2-3
 KFD2-STC4-Ex2
 KFD2-STC4-Ex2-Y229428
 KFD2-STV4-2-1
 KFD2-STV4-Ex2-1
 KFD2-STV4-Ex2-2
 KFD2-STC4-Ex1-Y122583
 KFD2-STC4-Ex1.20-Y122582
 KFD2-STC4-Ex2-Y132953

Smart Repeater 24V DC Supply voltage (EMC A)

KCD2-SCD-Ex1
 KFD2-SCD2-1.LK
 KFD2-SCD2-2.LK
 KFD2-SCD2-Ex1.LK
 KFD2-SCD2-Ex2.LK

Solenoid driver loop powered (EMC A)

KCD0-SD-Ex1.1245

Solenoid driver loop powered (EMC B)

KFD0-SD2-Ex1.10100
 KFD0-SD2-Ex1.1045
 KFD0-SD2-Ex2.1045
 KFD0-SD2-Ex1.1065
 KFD0-SD2-Ex1.1180
 KFD0-SD2-Ex2.1245

Solenoid driver 24 V DC supply voltage (EMC A)

KFD2-RCI-EX1
 KFD2-SL2-Ex1
 KFD2-SL2-Ex1.B

Job Id: **262.1-000947-5**
 Certificate No: **TAA00001WX**
 Revision No: **1**

KFD2-SL2-Ex1.B-Y129909
 KFD2-SL2-Ex2
 KFD2-SL2-Ex2.B
 KFD2-SL2-Ex1.LK
 KFD2-SL2-Ex1.LK-Y1
 KFD2-SL2-Ex1.LK.1045
 KFD2-SL2-Ex1.LK.1270

DC repeater loop powered (EMC B)

KFD0-CS-1.50
 KFD0-CS-Ex1.50P
 KFD0-CS-2.50
 KFD0-CS-Ex2.50P
 KFD0-CS-Ex1.51P
 KFD0-CS-Ex2.51P
 KFD0-CS-Ex2.51P-Y107439
 KFD0-CS-Ex1.53
 KFD0-CS-Ex2.53
 KFD0-CS-Ex1.52
 KFD0-CS-Ex2.52
 KFD0-CS-Ex1.54
 KFD0-CS-Ex2.54
 KFD0-CS-Ex1.54-Y1
 KFD0-CS-Ex1.54-Y2
 KFD0-CS-Ex1.54-Y3
 KFD0-CS-Ex2.54-Y207412

Earth leakage detector 24 V DC supply voltage (EMC A)

KFD2-ELD-16
 KFD2-ELD-EX16

Relay module loop powered (EMC B)

KFD0-RO-2
 KFD0-RO-Ex2
 KFD0-RSH-1.4S.PS2

Z-System Zener barriers as listed below:

Positive Polarity Shunt Zener Diode Barriers: Z7**
 Negative Polarity Shunt Zener Diode Barriers: Z8**
 A.C. Shunt Zener Diode Barriers: Z9**

Application/Limitation

The Type Approval covers hardware listed under Product description. When the hardware is used in applications to be classed by DNV GL, documentation for the actual application is to be submitted for approval by the manufacturer of the application system in each case. Reference is made to DNV GL Rules for Ships Pt.4 Ch.9 Control and Monitoring Systems.

Ex-certification is not covered by this certificate. Application in hazardous area to be approved in each case according to the Rules and Ex-Certification/ Special Condition for Safe Use listed in valid Ex-certificate issued by a notified/recognized Certification Body.

The modules must be terminated with Phoenix Contact E/AL-NS 35 termination fittings, or equivalent, on both ends of the DIN-rail to satisfy the requirements for vibration.

Job Id: **262.1-000947-5**
Certificate No: **TAA00001WX**
Revision No: **1**

Type Approval documentation

Hidden

Production place

Pepperl+Fuchs Asia Pte. Ltd
P+F Building
18 Ayer Rajah Crescent
139942 Singapore
Singapore

PT Pepperl+Fuchs Bintan
SD 56, 57 Lobam
Bintan Industrial Estate
Pulau Bintan, Riau
Indonesia

Tests carried out

Applicable tests according to Class Guideline DNVGL-CG-0339, Nov 2016

Marking of product

The products to be marked with:

- manufacturer name
- model name
- serial number
- power supply ratings

Periodical assessment

The scope of the periodical assessment is to verify that the conditions stipulated for the type are complied with, and that no alterations are made to the product design or choice of systems, software versions, components and/or materials.

The main elements of the assessment are:

- Ensure that type approved documentation is available
- Inspection of factory samples, selected at random from the production line (where practicable)
- Review of production and inspection routines, including test records from product sample tests and control routines
- Ensuring that systems, software versions, components and/or materials used comply with type approved documents and/or referenced system, software, component and material specifications
- Review of possible changes in design of systems, software versions, components, materials and/or performance, and make sure that such changes do not affect the type approval given
- Ensuring traceability between manufacturer's product type marking and the type approval certificate

Periodical assessment is to be performed after 2 years and after 3.5 years. A renewal assessment will be performed at renewal of the certificate.

END OF CERTIFICATE



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS


At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.

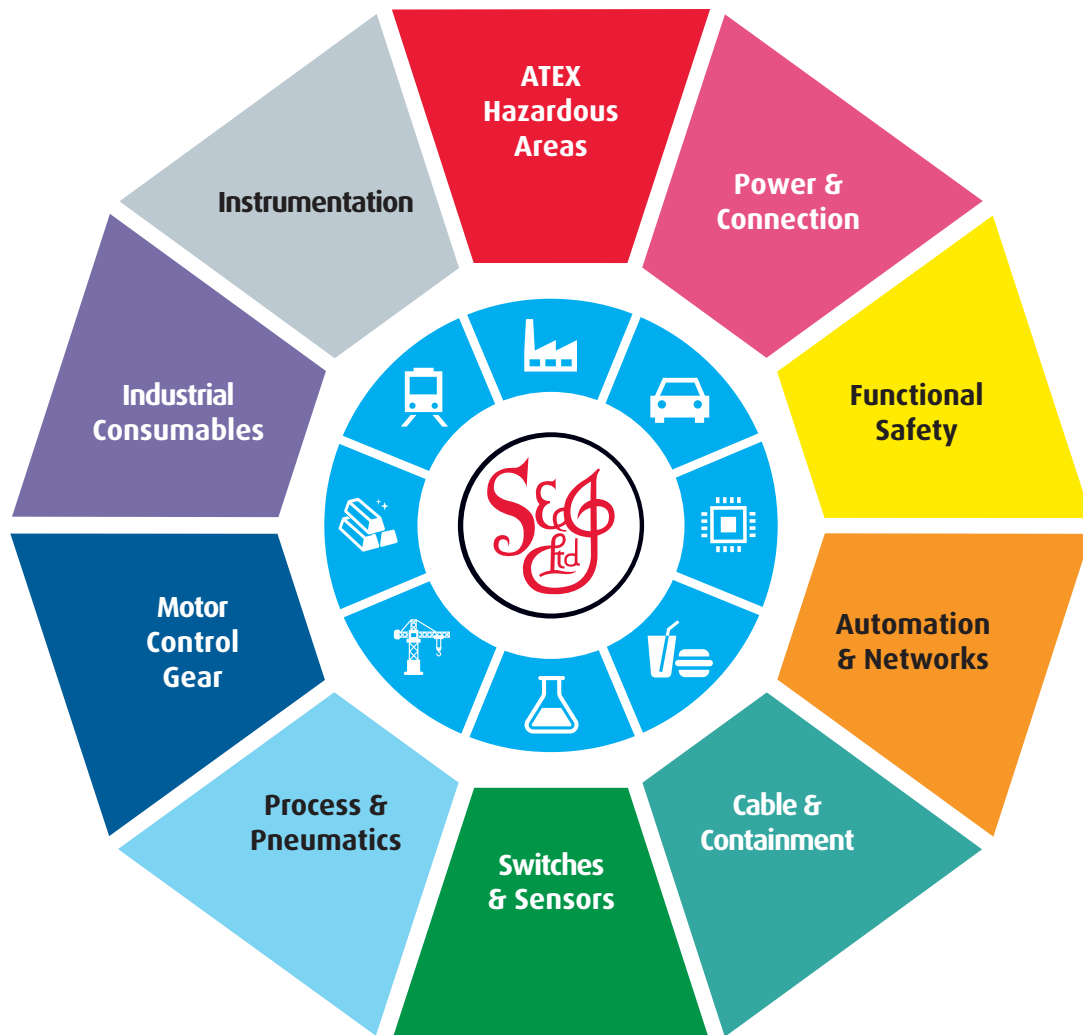

Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk