



Model Number

UC-F43-R2

Features

- RS 232 interface
- Simple insertion in the sensor connection lead

Function

Description

The unit can be inserted between the V17 cable connection socket and the V17 plug connection on the sensor for the TEACH-IN procedure.


The parameterised functions are retained when the programming unit is removed and/or the power is switched off.

Accessories

ULTRA3000

Software for ultrasonic sensors, comfort line

Dimensions

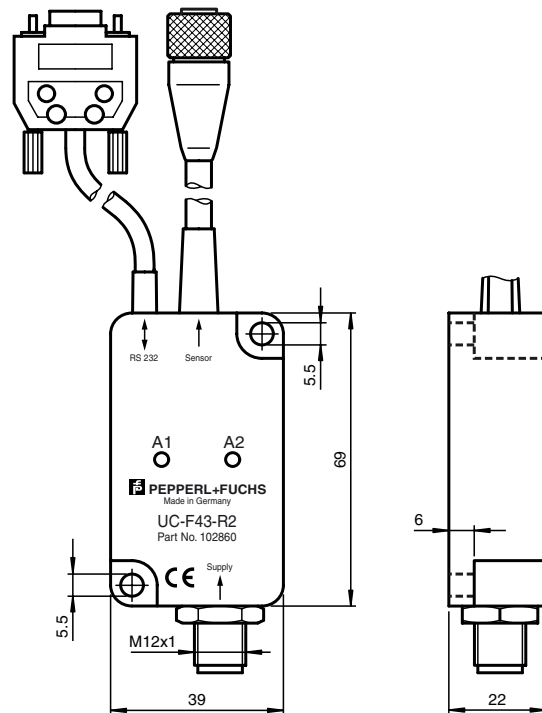

Technical data

Mechanical specifications

Connection	9-pin Sub-D socket
Cable length	1.5 m