


# Product datasheet

## Characteristics

# LA1KN20

TeSys K - Auxiliary contact block - 2 NO - screw-clamps terminals

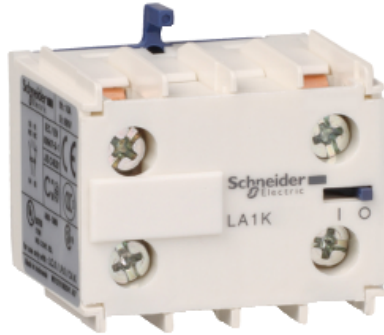

### Main

Range of product	TeSys K control relay TeSys K
Range	TeSys
Device short name	LA1
Product or component type	Auxiliary contact block
Auxiliary contacts operation	Instantaneous
Pole contact composition	2 NO
Connections - terminals	Screw clamp terminals 1 cable(s) 0.34...1.5 mm <sup>2</sup> flexible with cable end Screw clamp terminals 1 cable(s) 0.75...4 mm <sup>2</sup> flexible without cable end Screw clamp terminals 1 cable(s) 1.5...4 mm <sup>2</sup> solid Screw clamp terminals 2 cable(s) 0.34...1.5 mm <sup>2</sup> flexible with cable end Screw clamp terminals 2 cable(s) 0.75...4 mm <sup>2</sup> flexible without cable end Screw clamp terminals 2 cable(s) 1.5...4 mm <sup>2</sup> solid

### Complementary

Mounting location	Front
[Ui] rated insulation voltage	690 V - for control circuit conforming to BS 5424 690 V - for control circuit conforming to IEC 60947 750 V - for control circuit conforming to VDE 0010 group C 600 V - for control circuit conforming to CSA C22.2
[Ue] rated operational voltage	<= 690 V AC <= 400 Hz
[I <sub>th</sub> ] conventional free air thermal current	10 A (at 50 °C)
I <sub>rms</sub> rated making capacity	110 A at <= 690 V AC conforming to IEC 60947
Permissible short-time rating	80 A 1 s 60 A 500 ms 110 A 100 ms
Associated fuse rating	10 A gG at <= 690 V conforming to IEC 60947 10 A gG at <= 690 V conforming to VDE 0660
Minimum switching current	5 mA
Minimum switching voltage	17 V
Non overlap distance	0.5 mm
Insulation resistance	> 10 MOhm for control circuit
Tightening torque	1.3 N.m - on screw clamp terminals - with screwdriver Philips No 2

Depth	35 mm
Net weight	0.045 kg

## Environment

Environmental characteristic	Normal environment
Standards	BS 5424 VDE 0660 NF C 63-110 IEC 60947
Product certifications	UL CSA
IP degree of protection	IP2x conforming to VDE 0106
Protective treatment	TC conforming to IEC 60068
Ambient air temperature for operation	-25...50 °C
Ambient air temperature for storage	-50...80 °C
Operating altitude	2000 m without

## Offer Sustainability

REACH free of SVHC	Yes
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a> Pro-active China RoHS declaration (out of China RoHS legal scope)
Circularity Profile	No need of specific recycling operations
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

## Contractual warranty

Warranty	18 months
----------	-----------



# SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

# [www.scatts.co.uk](http://www.scatts.co.uk)