

# Product data sheet

## Characteristics

# ZB2BE102

## CONTACT BLOCK



### Main

Range of product	Harmony XAC
Product or component type	Contact block
Component name	ZB2
Electrical circuit type	Control circuit
Contact block application	Single speed
Contact block type	Single
Type of operator	Spring return
Product compatibility	XACA XB4 XB5
Contacts type and composition	1 NC
Mounting of block	Front mounting
Contact operation	Slow-break

### Complementary

Connections - terminals	Screw clamps terminals, 1 x 2.5 mm <sup>2</sup> with or without cable end Screw clamps terminals, 2 x 1.5 mm <sup>2</sup> with or without cable end
Mechanical durability	1000000 cycles
Contact code designation	A600 AC-15, U <sub>e</sub> = 240 V, I <sub>e</sub> = 3 A conforming to IEC 947-5-1 appendix A A600 AC-15, U <sub>e</sub> = 600 V, I <sub>e</sub> = 1.2 A conforming to IEC 947-5-1 appendix A Q600 DC-13, U <sub>e</sub> = 250 V, I <sub>e</sub> = 0.27 A conforming to IEC 947-5-1 appendix A Q600 DC-13, U <sub>e</sub> = 600 V, I <sub>e</sub> = 0.1 A conforming to IEC 947-5-1 appendix A
[I <sub>th</sub> ] conventional enclosed thermal current	10 A
[U <sub>i</sub> ] rated insulation voltage	600 V (pollution degree 3) conforming to IEC 60947-1
[U <sub>imp</sub> ] rated impulse withstand voltage	IEC 60947-1 6 kV
Maximum resistance across terminals	25 MOhm
Operating force	13... 15 N
Short-circuit protection	10 A fuse protection by cartridge fuse type gG (gl)
Rated operational power in W	40 W DC-13 for 1000000 cycles, operating rate <3600 cyc/h at 120 V, load factor = 0.5 conforming to IEC 60947-5-1

48 W DC-13 for 1000000 cycles, operating rate <3600 cyc/h at 48 V, load factor = 0.5 conforming to IEC 60947-5-1  
 65 W DC-13 for 1000000 cycles, operating rate <3600 cyc/h at 24 V, load factor = 0.5 conforming to IEC 60947-5-1

Terminals description ISO n°1	(11-12)NC
Net weight	0.02 kg

## Environment

Standards	EN/IEC 60204-32 EN/IEC 60947-5-1 CSA C22.2 No 14 UL 508
Ambient air temperature for operation	-25...70 °C
Ambient air temperature for storage	-40...70 °C
Vibration resistance	15 gn (f= 10...500 Hz) conforming to IEC 60068-2-6
Shock resistance	100 gn conforming to IEC 60068-2-27
Electrical shock protection class	Class II conforming to IEC 61140

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End of Life Information</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

## Contractual warranty

Warranty	18 months
----------	-----------

## ZB2BE102 is replaced by:



### Control Product Components ZBE102

Single contact block, silver alloy, screw clamp terminal, 1 NC

Qty 1

Reason for Substitution: End of life | Substitution date: 01 April 1999



# SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899


At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.

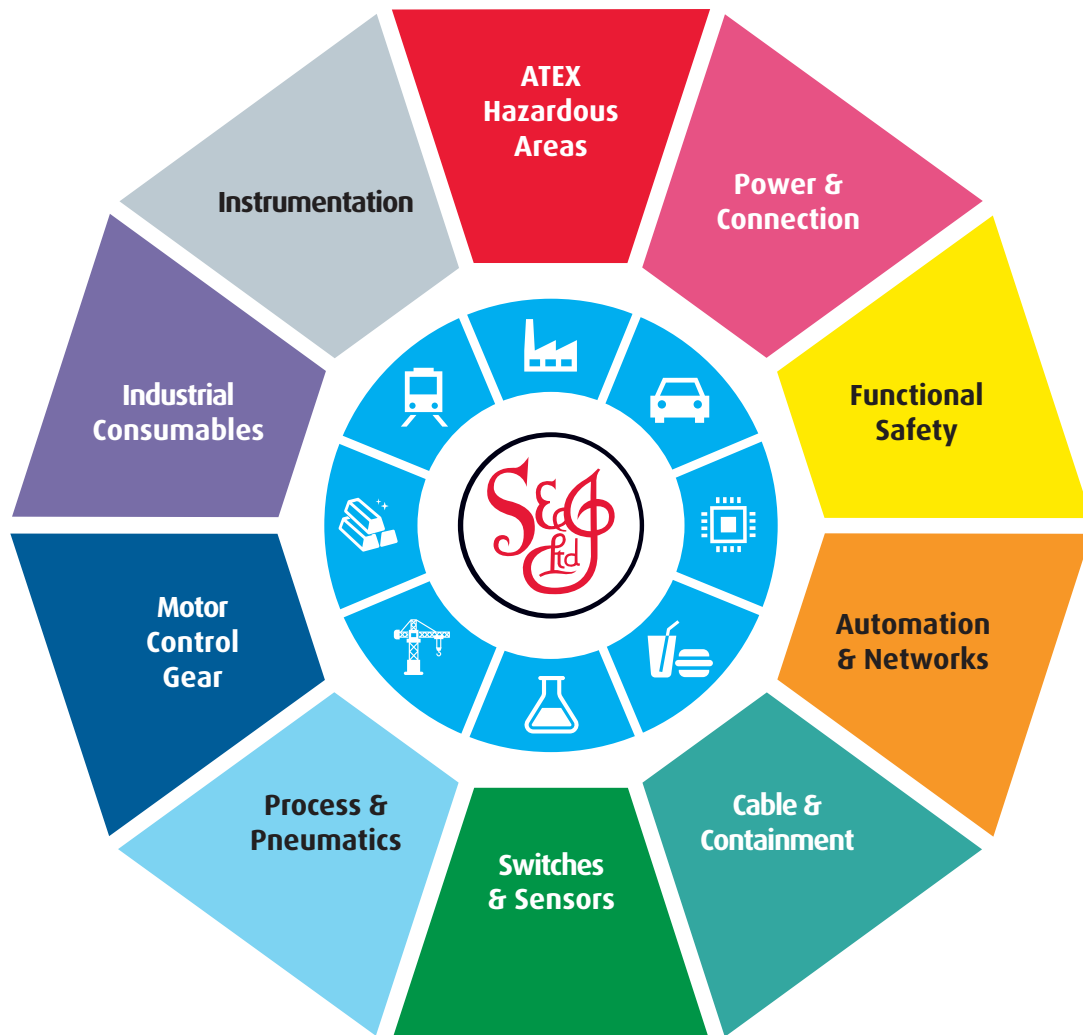

Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

# [www.scatts.co.uk](http://www.scatts.co.uk)