


Product data sheet

Characteristics

LADN22S

Auxiliary contact block, TeSys D, 2NO + 2NC, front mounting, screw-clamps terminals, red front face

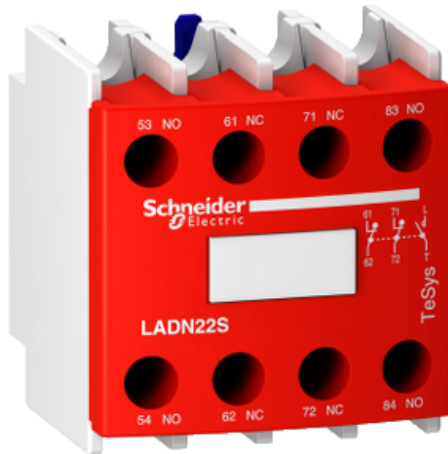

Main

Range of product	TeSys D
Range	TeSys
Device short name	LADN
Product or component type	Auxiliary contact block
Range compatibility	TeSys CAD TeSys LC1D TeSys LC1F TeSys CR1F
Auxiliary contacts operation	Instantaneous
Pole contact composition	2 NO + 2 NC
Connections - terminals	screw clamp terminals 1 0.00...0.00 in ² (1...2.5 mm ²)flexible with cable end screw clamp terminals 1 0.00...0.00 in ² (1...2.5 mm ²)flexible without cable end screw clamp terminals 2 0.00...0.00 in ² (1...2.5 mm ²)flexible with cable end screw clamp terminals 2 0.00...0.00 in ² (1...2.5 mm ²)flexible without cable end screw clamp terminals 1 0.00...0.00 in ² (1...2.5 mm ²)solid screw clamp terminals 2 0.00...0.00 in ² (1...2.5 mm ²)solid

Complementary

Mounting location	Front
[Ui] rated insulation voltage	690 V IEC 60947-5-1 600 V CSA 600 V UL
[Ue] rated operational voltage	690 V AC 25...400 Hz
[Ith] conventional free air thermal current	10 A 140 °F (60 °C)
Irms rated making capacity	140 A AC IEC 60947-5-1 250 A DC IEC 60947-5-1
Permissible short-time rating	100 A 140 °F (60 °C) 1 s 120 A 140 °F (60 °C) 500 ms

Apr 8, 2020

	140 A 140 °F (60 °C) 100 ms
Protection type	GG fuse 10 A
Mechanical durability	30 Mcycles
Minimum switching current	5 mA
Minimum switching voltage	17 V
Non-overlap time	1.5 ms on de-energisation no overlap between NC and NO contact 1.5 ms on energisation no overlap between NC and NO contact
Insulation resistance	> 10 MOhm
Tightening torque	15.05 lbf.in (1.7 N.m)
Net weight	0.11 lb(US) (0.05 kg)
Color	Red RAL 3000)

Environment

Environmental characteristic	Normal environment
Standards	EN/IEC 60947-5-1 UL 60947-5-1 CSA C22.2 No 60947-5-1 GB/T 14048.5
Product certifications	IECEE CB Scheme UL CSA CCC EAC
IP degree of protection	IP20 IEC 60529
Protective treatment	TH IEC 60068
Ambient air temperature for operation	23...140 °F (-5...60 °C)
Ambient air temperature for storage	-76...176 °F (-60...80 °C)
Operating altitude	9842.52 ft (3000 m)

Ordering and shipping details

Category	22341 - CONTACTOR,D,K,&F ACCESS
Discount Schedule	I12
GTIN	00785901611684
Returnability	Yes
Country of origin	FR

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope)
Environmental Disclosure	Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk