

PF 11.000 | PFA 10.000

ECOOL FILTERFAN | EXHAUST FILTER 19–24 m³/h

- installation size 1, air flow rate up to 24 m³/h
- system of protection IP 54, NEMA type 12
- UL, cUL approval
- cut-out compatible with installation size 1 from the 3rd Generation



PRODUCT		PF 11.000					Unit
ARTICLE NO.	GRAY IP 54	11611101055	11611151055	11611851055	11611801055	11611701055	
ARTICLE NO.	BLACK IP 54				11611801050		

DATA


Rated voltage ±10 %	AC 50 60 Hz		DC			V
	230	115	12	24	48	
Unimpeded airflow	19 24					m³/h
Airflow rate in combination with exhaust filter	12 14					
Power consumption	12 11		2.4		2.6	W
Current consumption	0.07 0.06	0.15 0.15	0.2	0.1	0.05	A
Noise level according to EN ISO 3741	33 33		33			dB (A)
Weight	0.55		0.16			kg
Type of connection	cable, 2-core, length 310 mm					
Fuse	6					A
System of protection according to EN 60529 / UL 50	NEMA type 12 - standard filter					
Filtration efficiency according to EN 779	> 90					%
Filter mat quality class according to EN 779	G 4					
Duty cycle	100					%
Bearing type	sleeve bearing		ball bearing			
Service life L ₁₀ (+ 40 °C) ¹	52500	55000	70000			h
Temperature range	−40 ... +55 −40 ... +131					°C °F
Design (housing and protection against accidental contact)	made of injection-moulded thermoplastic, self-extinguishing, UL 94 V0					
Colour	RAL 7035 different colours available on request					

ACCESSORIES		ARTICLE NUMBER
Exhaust filter	gray	11710001055
Exhaust filter	black	11710001050
Spare filter mats	5 pieces	18611600029
Thermostat		17121000000
Hygrostat		17207000000
Rainhood in stainless steel		18102000014


For additional models, options and voltages visit www.pfannenber.com or contact us directly.

¹ fan failure is defined as being when the current and speed deviate or the operating noises are out of the ordinary

Cooling capacity performance curves

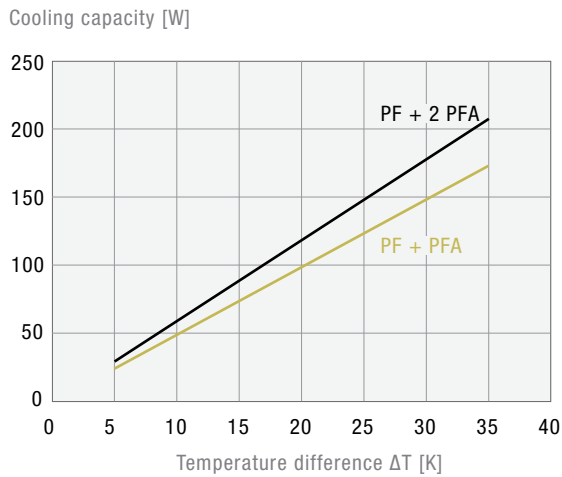


Static pressure performance curve

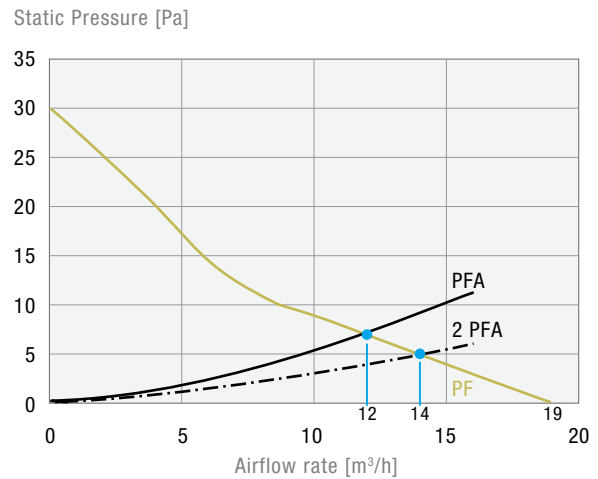

Dimensions

mm	PF 11.000		PFA 10.000
	AC	DC	
X	109	109	109
Y	109	109	109
Z1	4	4	4
Z2	62	49	19
A¹	92	92	92
B¹	92	92	92

¹ for material thicknesses up to 2 mm
+ 1 mm for thickness of material > 2 mm ≤ 3 mm

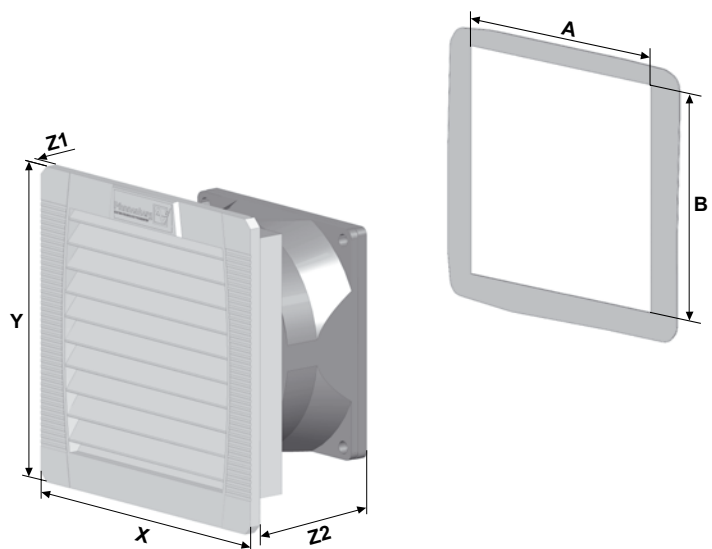



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk