



Pushing Performance

RJI RJ45 plug Cat5, 4p IDC

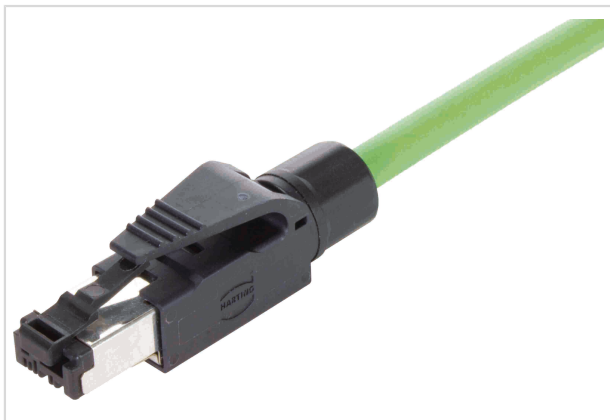


Image is for illustration purposes only. Please refer to product description.

Part number	09 45 151 1100
Specification	RJI RJ45 plug Cat5, 4p IDC
HARTING eCatalogue	https://b2b.harting.com/09451511100

Identification

Category	Connectors
Series	HARTING RJ Industrial®
Element	Cable connector
Specification	Straight

Version

Termination method	IDC termination
Shielding	Fully shielded, 360° shielding contact
Number of contacts	4
Pack contents	Hood with shielding Splicing element Cable gland Assembly instructions

Technical characteristics

Conductor cross-section	0.22 ... 0.32 mm ² Stranded 0.26 ... 0.32 mm ² Solid
Conductor cross-section	AWG 24 ... AWG 22 Stranded AWG 23 ... AWG 22 Solid
Wire outer diameter	≤1.6 mm
Limiting temperature	-40 ... +70 °C
Mating cycles	≥750
Degree of protection acc. to IEC 60529	IP20
Cable diameter	4.5 ... 9 mm
Transmission characteristics	Cat. 5 Class D up to 100 MHz

Page 1 / 2 | Creation date 2020-05-17 | Please note that the data specified here were taken as extracts from the online catalogue. Please refer to the user documentation for the complete and up-to-date information and data. Please also note that the user is responsible for validating functionality, conformity with applicable laws and directives, as well as for the electrical safety in the particular application.

HARTING Electronics GmbH | Marienwerderstraße 3 | 32339 Espelkamp | Germany
Phone +49 5772 47-97200 | electronics@HARTING.com | www.HARTING.com



Pushing Performance

Technical characteristics

Data rate	10 Mbit/s
	100 Mbit/s

Material properties

Material (hood/housing)	Polyamide (PA)
Colour (hood/housing)	Black
Material flammability class acc. to UL 94	V-0
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	No
REACH ANNEX XIV substances	No
REACH SVHC substances	No

Specifications and approvals

Specifications	IEC 60603-7 Mating face
	IEC 11801
	EN 50173-1
	EN 45545-2 R26: HL1, HL2, HL3
Approvals	DNV GL
UL / CSA	UL 1977 ECBT2.E102079
	CSA-C22.2 No. 182.3 ECBT8.E102079
PROFINET	Yes

Commercial data

Packaging size	10
Net weight	35.3 g
Country of origin	Romania
European customs tariff number	85366990
eCl@ss	27440101 Rectangular connectors (set)



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk