
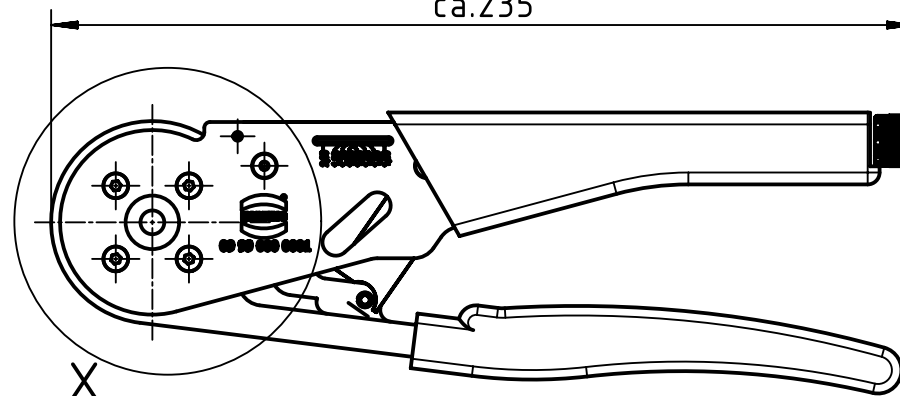




X (1:1)

ca.235

*Usage of contact 09 15 000 6107/6207

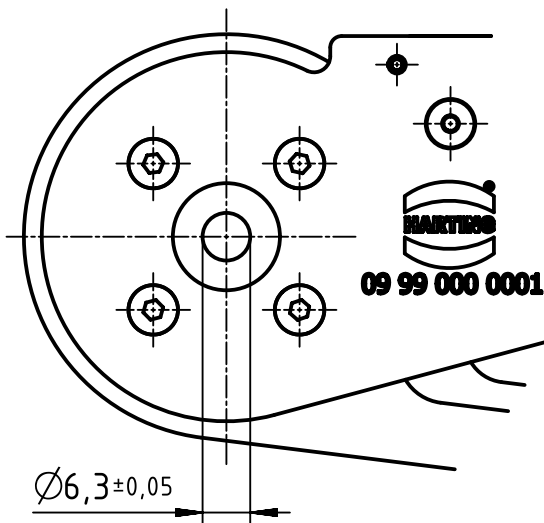

Slide starp assembly
and slide locking screw

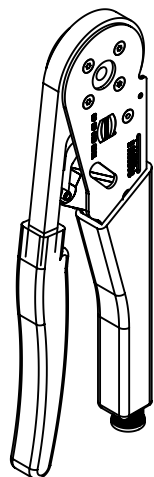

Contacts	mm ²	AWG	Crimping depth
Han D	0,14 *	26	1,00
	0,37	22	1,30
	0,50	20	1,55
	0,75	18	1,55
	1,00	18	1,55
	1,50	16	1,80
	1,38	16	1,55
	2,50	14	1,55
Han E	2,10	14	1,45
	0,50	20	1,55
	0,75	18	1,55
	1,00	18	1,55
	1,50	16	1,80
	1,38	16	1,60
	2,50	14	1,60
	2,10	14	1,70
Han C	3,00	12	2,00
	4,00	12	2,00
	1,50	16	1,80
	2,50	14	1,60
	4,00	12	2,00

Crimping depth adjustable from $\varnothing 1\text{mm}$ to $\varnothing 2\text{mm}$

		All Dimensions in mm Original Size DIN A4		Scale 1:2		Free size tol.		Ref.							
								Sub.							
		All rights reserved		Created by FINKEV		Inspected by BERGHORN		Standardisation TIEMANNA		Date 2018-02-15		State Final Release			
Department EL PD				Title Four-Indent Crimping Tool								Doc-Key / ECM-Nr. 100090804/UGD/005/A 500000131102			
HARTING Electric GmbH & Co. KG				Type TB		Number 09 99 000 0001						Rev. A		Page 1/1	
D-32339 Espelkamp															