



Connector Location A


Connector Location B

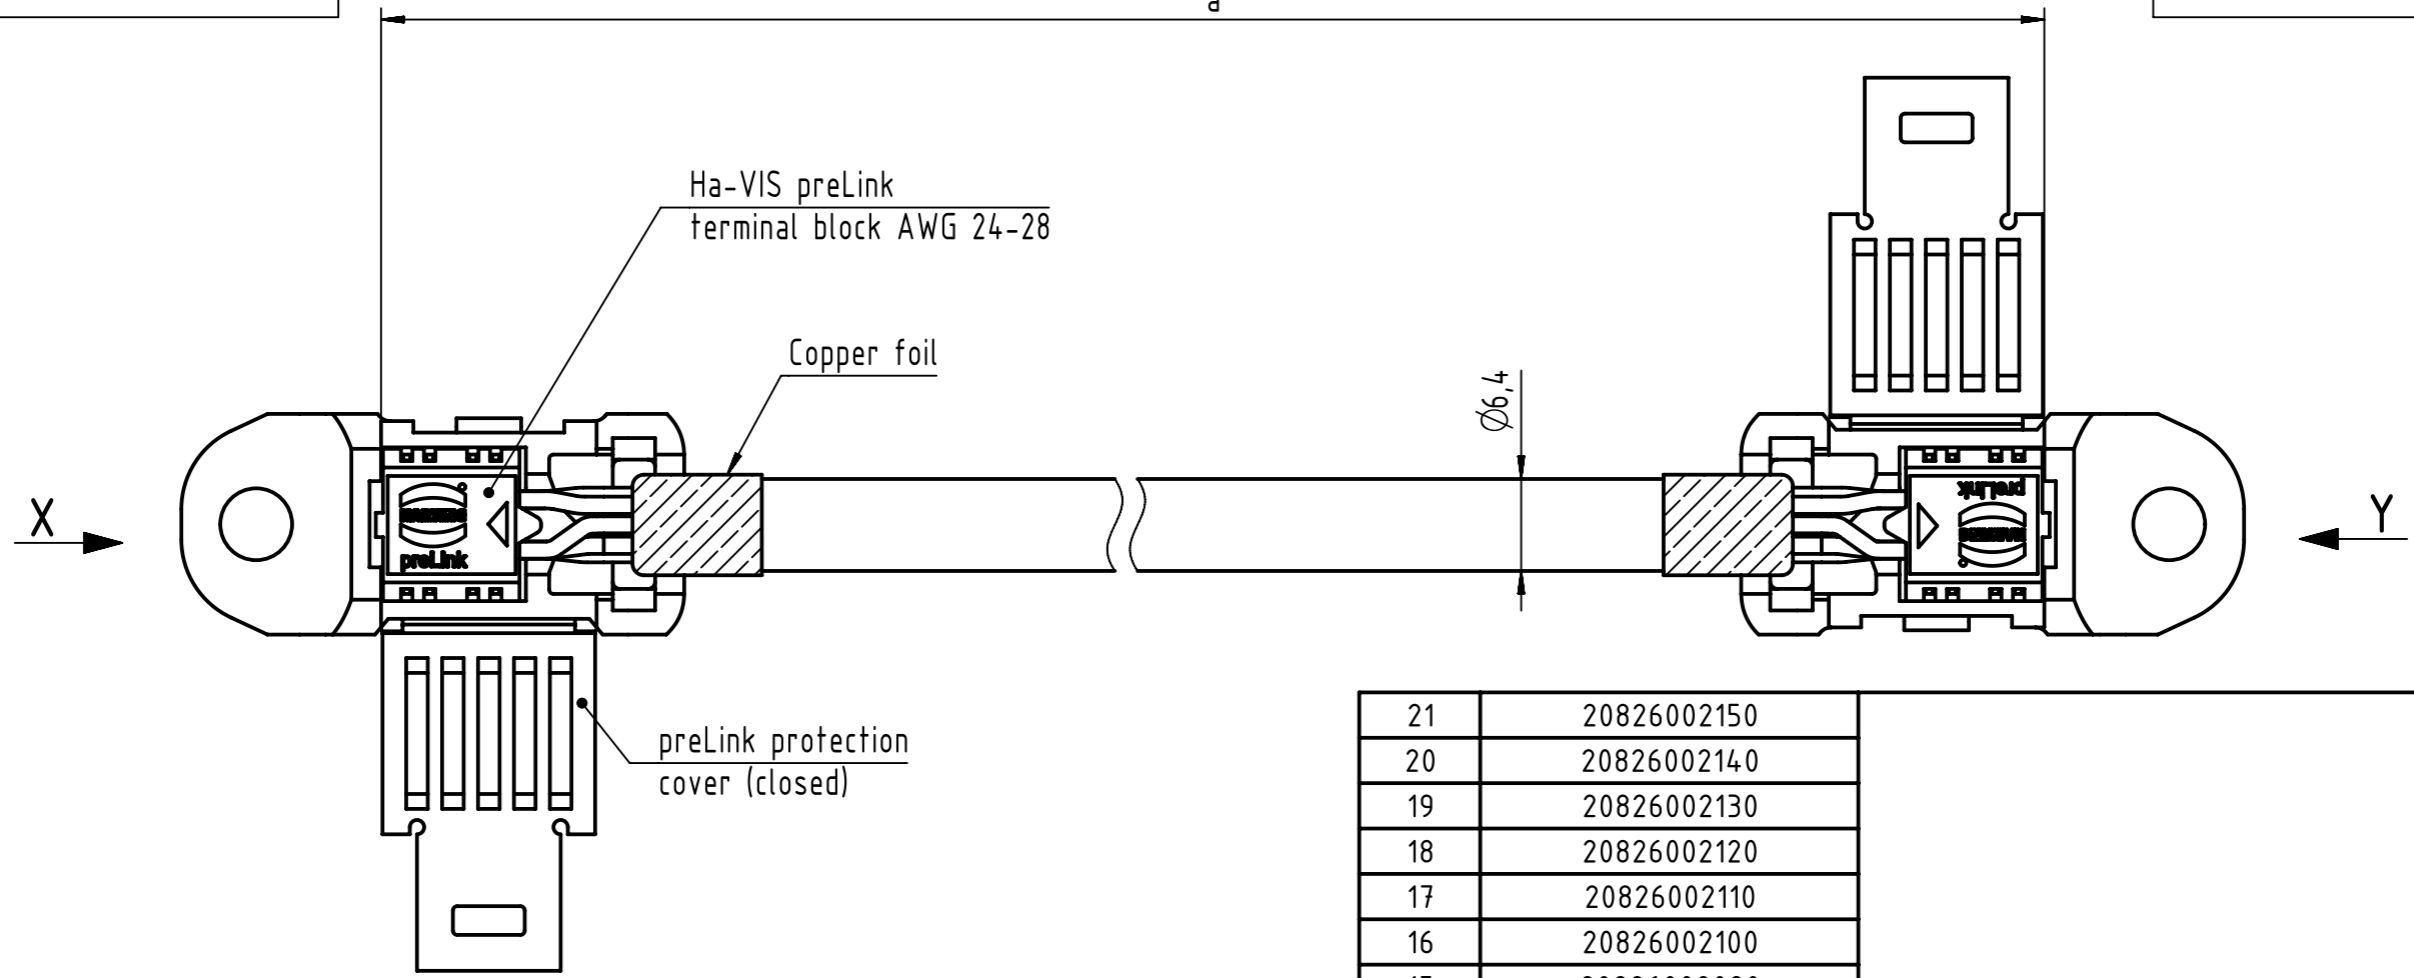


X
(without preLink protection cover)



Loading Plan
acc. to TIA/EIA 568B

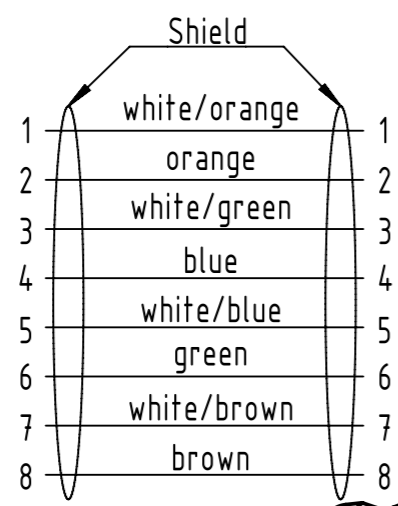


Y
(without preLink protection cover)



21	20826002150		15
20	20826002140		14
19	20826002130		13
18	20826002120		12
17	20826002110		11
16	20826002100		10
15	20826002090		9
14	20826002080		8
13	20826002075		7.5
12	20826002070		7
11	20826002060		6
10	20826002050		5
9	20826002040		4
8	20826002030		3
7	20826002020		2
6	20826002010		1
5	20826002008		0.8
4	20826002006		0.6
3	20826002004		0.4
2	20826002003		0.3
1	20826002002		0.2
Cont. no.	Part no.	Type of cable	Dim. a[m]
		4x2xAWG 26/7, S/FTP, PUR, Cat.7, yellow	

- Protection level: IP20
- Temperature range:
 - Fixed installation: -30°C ...+75°C
 - Dynamic installation: -5°C ...+50°C

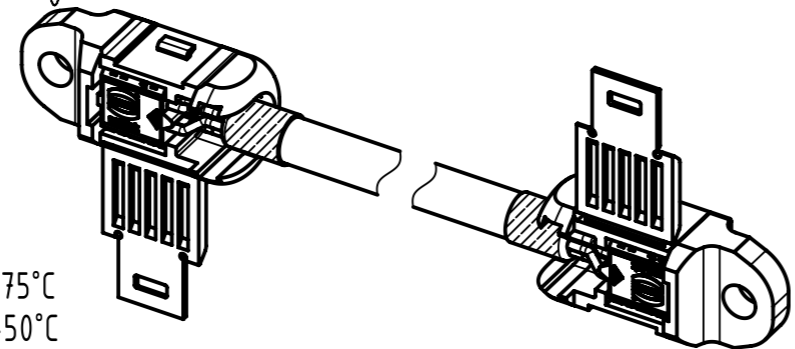

	All Dimensions in mm	Tech. Character.	Free size tol.	According to production drawing
	All rights reserved Department HCS - RO	Created by BANCIUD Banciu	Inspected by COSTEA Costea	Standardisation MUNTEANV Muntean
HARTING Customised Solutions D-32339 Espelkamp		Title System cable preLink 2x terminal module		Doc-Key / ECM-Nr. 100209218/UGD/005/D 500000160481
		Type TB	Number 20826002XXX	Rev. D Page 1/1