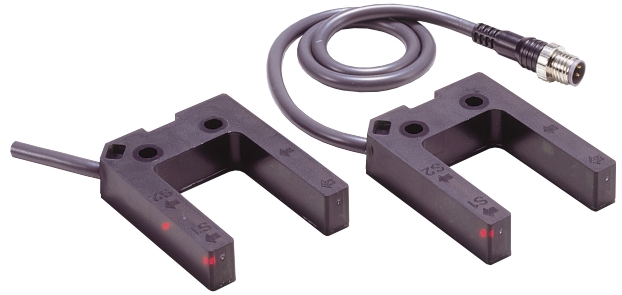


**OMRON****Grooved-type Photoelectric Sensor****E3Z-G**

- Grooved design eliminates the need for optical axis adjustment.
- Two-axis models also available.
- Ideal for detection and positioning for cranes and conveyor systems in automated warehouses.

**Ordering Information****■ Sensor Unit**

Sensing method	Appearance	Connection method	Sensing distance	Number of optical axes	Model	
					NPN output	PNP output
Through-beam		Pre-wired (0.5/2 m)		1	E3Z-G61	E3Z-G81
		Junction connector			E3Z-G61-M3J	E3Z-G81-M3J
		Pre-wired (0.5/2 m)		2	E3Z-G62	E3Z-G82
		Junction connector			E3Z-G62-M3J	E3Z-G82-M3J

**Note:** Models with a 0.5-m cable are available. When ordering, specify the cable length by adding the code "0.5M" to the model number (e.g., E3Z-G61 0.5M).

**■ Accessories (Order Separately)****Sensor I/O Connector**

Cable specifications	Appearance	Type of cable		Model
Standard cable	Straight	2 m	Four-core cable	XS3F-M421-402-A
		5 m		XS3F-M421-405-A
	L-shape	2 m		XS3F-M422-402-A
		5 m		XS3F-M422-405-A

**Specifications****■ Ratings/Characteristics**

Item	Sensing method	Through beam (grooved type)			
	Number of optical axes	1		2	
	NPN output	E3Z-G61	E3Z-G61-M3J	E3Z-G62	E3Z-G62-M3J
	PNP output	E3Z-G81	E3Z-G81-M3J	E3Z-G82	E3Z-G82-M3J
<b>Sensing distance</b>	25 mm (distance between arms of groove)				
<b>Light source (wave length)</b>	Infrared LED (940 nm)				
<b>Power supply voltage</b>	12 to 24 VDC±10% including 10% (p-p) max. ripple				
<b>Current consumption</b>	25 mA max.		40 mA max.		
<b>Control output</b>	Load power supply voltage: 26.4 VDC max. Load current: 100 mA max. (Residual voltage: 1 V max.) L-ON/D-ON selectable (With 2-axis models, L-ON or D-ON can be selected for each axis.)				
<b>Circuit protection</b>	Protection from reversed power supply connection, output short-circuits, and mutual interference.				
<b>Response time</b>	Operation or reset: 1 ms max.				

Item	Sensing method Number of optical axes NPN output PNP output	Through beam (grooved type)			
		1		2	
		E3Z-G61	E3Z-G61-M3J	E3Z-G62	E3Z-G62-M3J
		E3Z-G81	E3Z-G81-M3J	E3Z-G82	E3Z-G82-M3J
Ambient illumination (receiver side)	Incandescent lamp: 3,000 lux max. Sunlight: 10,000 lux max.				
Ambient temperature	Operating: -25 to 55°C/Storage: -40 to 70°C (with no icing or condensation)				
Ambient humidity	Operating: 35% to 85%/Storage: 35% to 95% (with no condensation)				
Insulation resistance	20 MΩ min. at 500 VDC between lead wires and case				
Dielectric strength	1,000 VAC, 50/60 Hz for 1 min between lead wires and case				
Vibration resistance (destruction)	10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions				
Shock resistance (destruction)	500 m/s <sup>2</sup> 3 times each in X, Y, and Z directions				
Enclosure rating	IP64 (IEC60529)				
Connection method	Pre-wired cable (length: 2 m or 0.5 m)		Junction connector	Pre-wired cable (length: 2 m or 0.5 m) Junction connector	
Indicator	Operation indicator (orange)				
Weight (packed state)	Pre-wired models (with 2-m cable): 65 g Models with junction connectors: 30 g				
Material	ABS				
Accessories	Instruction sheet				

## Operation


### ■ Output Circuits (NPN Output)

No. of optical axes/model	Output transistor status	Timing chart	Mode selector	Output circuit
1 axis E3Z-G61 E3Z-G61-M3J	Light ON		LIGHT ON (L/ON)	<p><b>Connecting Pin Arrangement</b></p> <p><b>Note:</b> Pin 2 is not used.</p>
	Dark ON		DARK ON (D/ON)	<p><b>Connector Pin Arrangement</b></p>
2 axes E3Z-G62 E3Z-G62-M3J	Light ON		LIGHT ON (L/ON)	<p><b>Connector Pin Arrangement</b></p>
	Dark ON		DARK ON (D/ON)	<p><b>Connector Pin Arrangement</b></p>

■ Output Circuits (PNP Output)

No. of optical axes/model	Output transistor status	Timing chart	Mode selector	Output circuit
1 axis E3Z-G81 E3Z-G81-M3J	Light ON	Incident Interrupted Operation indicator (orange) ON OFF Output transistor ON OFF Load Operate Reset (Between brown and black)	LIGHT ON (L/ON)	<p>Connector Pin Arrangement</p> <p>Note: Pin 2 is not used.</p>
	Dark ON	Incident Interrupted Operation indicator (orange) ON OFF Output transistor ON OFF Load Operate Reset (Between brown and black)	DARK ON (D/ON)	
2 axes E3Z-G82 E3Z-G82-M3J	Light ON	Incident Interrupted Operation indicator (orange) ON OFF Output transistor ON OFF Load Operate Reset (Between brown and black)	LIGHT ON (L/ON)	<p>Connector Pin Arrangement</p>
	Dark ON	Incident Interrupted Operation indicator (orange) ON OFF Output transistor ON OFF Load Operate Reset (Between brown and black)	DARK ON (D/ON)	

Structure of Sensor I/O Connector




- XS3F-M421-402-A
- XS3F-M421-405-A
- XS3F-M422-402-A
- XS3F-M422-405-A

Classification	Wire color	Connector pin number	Use	
			1-axis models	2-axis models
DC	Brown	1	Power supply (+V)	
	White	2	---	Output 2 (S2)
	Blue	3	Power supply (0 V)	
	Black	4	Output	Output 1 (S1)

Note: Pin 2 of 1-axis models is not used.

# Dimensions

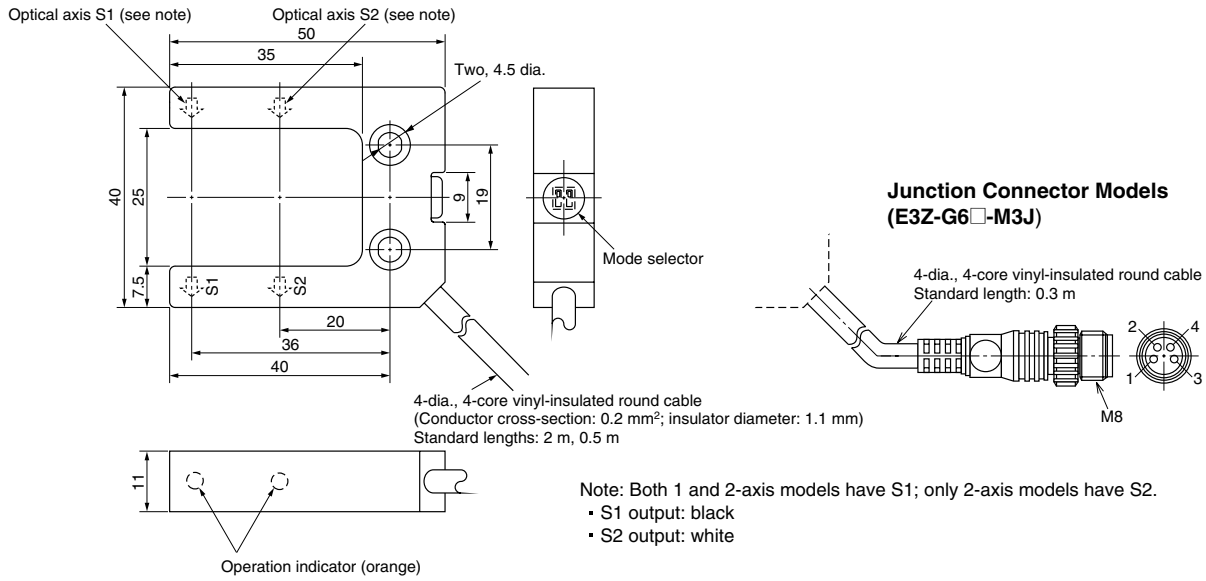

**ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.**  
 To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Cat. No. E320-E1-1      **In the interest of product improvement, specifications are subject to change without notice.**

## OMRON Corporation

Industrial Automation Company

Industrial Sensors Division  
 Sensing Devices and Components Division H.Q.  
 Shiokoji Horikawa, Shimogyo-ku  
 Kyoto, 600-8530 Japan  
 Tel: (81)75-344-7068/Fax: (81)75-344-7107

Printed in Japan  
 0501-1M (A)



# SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

# [www.scatts.co.uk](http://www.scatts.co.uk)