

Low-cost Encoder with Diameter of 50 mm

E6CP-A

CSM_E6CP-A_DS_E_6_4

General-purpose Absolute Encoder with External Diameter of 50 mm

- Absolute model.
- External diameter of 50 mm.
- Resolution: 256 (8-bit).
- Lightweight construction using plastic body.



Be sure to read *Safety Precautions* on page 5.

Ordering Information

Encoders [Refer to *Dimensions* on page 5.]

| Power supply voltage | Output configuration | Resolution (divisions) | Connector for H8PS Cam Positioner | Model |
|----------------------|-----------------------|------------------------|-----------------------------------|-----------------------|
| 5 to 12 VDC | Open-collector output | 256 (8-bit) | None | E6CP-AG3C 256P/R 2M |
| 12 to 24 VDC | | | Supported | E6CP-AG5C 256P/R 2M |
| | | | | E6CP-AG5C-C 256P/R 2M |

Note: When connecting to the H8PS, use the E6CP-AG5C-C, which is connected using a connector. It cannot be used on other models.

Accessories (Order Separately)

[Dimensions: Refer to *Accessories* for coupling dimensions and to page 5 for the dimensions of other accessories.]

| Name | Model | Remarks |
|------------------------|-----------|-------------------------------------------------------|
| Couplings | E69-C06B | Provided with the E6CP-AG3C and E6CP-AG5C. |
| | E69-C68B | Different end diameter |
| | E69-C610B | Different end diameter |
| | E69-C06M | Metal construction |
| Servo Mounting Bracket | E69-2 | Provided with the product. (Three brackets in a set.) |
| Extension Cable | E69-DF5 | 5 m |
| | E69-DF10 | 10 m |
| | E69-DF20 | 20 m |

Refer to *Accessories* for details.

Ratings and Specifications

| Item | Model | E6CP-AG3C | E6CP-AG5C | E6CP-AG5C-C |
|-------------------------------|--------|----------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|-----------------------------------------------|
| Power supply voltage | | 5 VDC -5% to 12 VDC +10%, ripple (p-p): 5% max. | 12 VDC -10% to 24 VDC +15%, ripple (p-p): 5% max. | |
| Current consumption*1 | | 90 mA max. | 70 mA max. | |
| Resolution (rotations) | | 256 (8-bit) | | |
| Output code | | Gray code | | |
| Output configuration | | Open-collector output | | |
| Output capacity | | Applied voltage: 28 VDC max. Sink current: 16 mA max. Residual voltage: 0.4 V max. (at sink current of 16 mA) | | |
| Maximum response frequency*2 | | 5 kHz | | |
| Logic | | Negative logic (high = 0, low = 1) | | |
| Accuracy | | ±1° max. | | |
| Direction of rotation | | Output code incremented by CW (as viewed from the end of the shaft) | | |
| Rise and fall times of output | | 1 μs max. (Control output voltage: 16 V, Load resistance: 1 kΩ, Output cable: 2 m max.) | | |
| Starting torque | | 0.98 mN·m max. | | |
| Moment of inertia | | 1 × 10 ⁻⁶ kg·m ² max. | | |
| Shaft loading | Radial | 29.4 N | | |
| | Thrust | 19.6 N | | |
| Maximum permissible speed | | 1,000 r/min | | |
| Ambient temperature range | | Operating: -10 to 55°C (with no icing), Storage: -25 to 85°C (with no icing) | | |
| Ambient humidity range | | Operating/Storage: 35% to 85% (with no condensation) | | |
| Insulation resistance | | 200 MΩ min. (at 500 VDC) between current-carrying parts and case | | |
| Dielectric strength | | 500 VAC, 50/60 Hz for 1 min between current-carrying parts and case | | |
| Vibration resistance | | Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions | | |
| Shock resistance | | Destruction: 1,000 m/s ² 3 times each in X, Y, and Z directions | | |
| Degree of protection*3 | | IEC 60529 IP50 | | |
| Connection method | | Pre-wired Models (Standard cable length: 2 m) | | Connector Models (Standard cable length: 2 m) |
| Material | | Case: ABS, Main unit: PPS, Shaft: SUS416, Mounting Bracket: Galvanized iron | | |
| Weight (packed state) | | Approx. 200 g | | |
| Accessories | | Coupling (excluding Connector Models), Servo Mounting Bracket, Hexagonal wrench (excluding Connector Models), Instruction manual | | |

*1. An inrush current of approximately 8 A will flow for approximately 0.3 ms when the power is turned ON.

*2. The maximum electrical response speed is determined by the resolution and maximum response frequency as follows:

$$\text{Maximum electrical response speed (rpm)} = \frac{\text{Maximum response frequency}}{\text{Resolution}} \times 60$$


This means that the Rotary Encoder will not operate electrically if its speed exceeds the maximum electrical response speed.

*3. No protection is provided against water or oil.


I/O Circuit Diagrams

| | |
|-----------------------------|--------------------|
| E6CP-AG3C, E6CP-AG5C | E6CP-AG5C-C |
|-----------------------------|--------------------|

Output Circuits

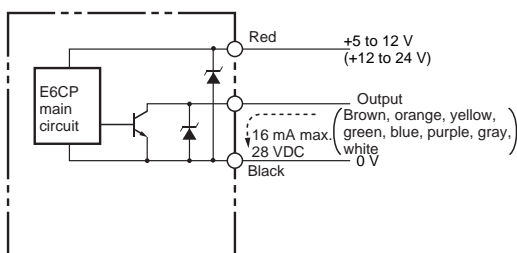

Output mode

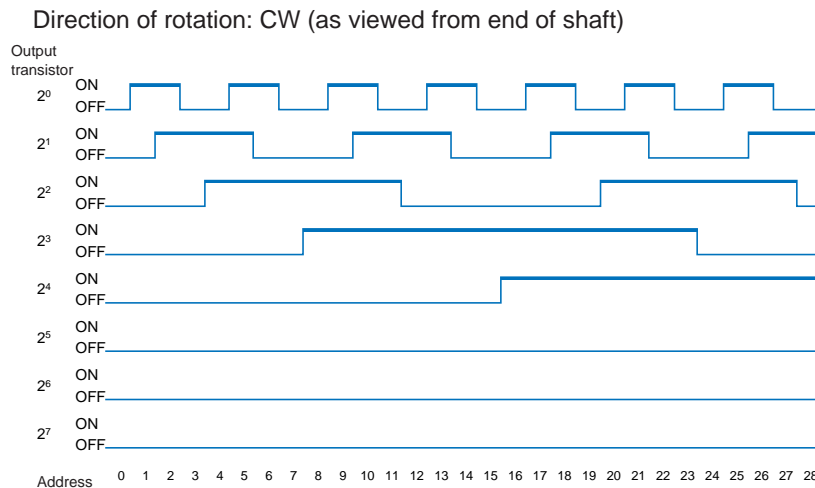

Connection

| Color | E6CP-AG3C | E6CP-AG5C |
|--------|--------------------------|---------------------------|
| Red | Power supply 5 to 12 VDC | Power supply 12 to 24 VDC |
| Black | 0 V (common) | |
| Brown | Output 2 ⁰ | |
| Orange | Output 2 ¹ | |
| Yellow | Output 2 ² | |
| Green | Output 2 ³ | |
| Blue | Output 2 ⁴ | |
| Purple | Output 2 ⁵ | |
| Gray | Output 2 ⁶ | |
| White | Output 2 ⁷ | |


Note: The circuit is the same for all bit outputs.
Each E6CP Rotary Encoder has one main circuit.

| Terminal No. | E6CP-AG5C-C |
|--------------|----------------------------|
| 1 | Connected internally |
| 2 | |
| 3 | Output 2 ⁵ |
| 4 | Output 2 ¹ |
| 5 | Output 2 ⁰ |
| 6 | Output 2 ⁷ |
| 7 | Output 2 ⁴ |
| 8 | Output 2 ² |
| 9 | Output 2 ³ |
| 10 | Output 2 ⁶ |
| 11 | --- |
| 12 | Power supply: 12 to 24 VDC |
| 13 | 0 V (common) |

Note: The circuit is the same for all bit outputs.
Each E6CP Rotary Encoder has one main circuit.

Positioner Connection Example

H8PS Cam Positioner Connection

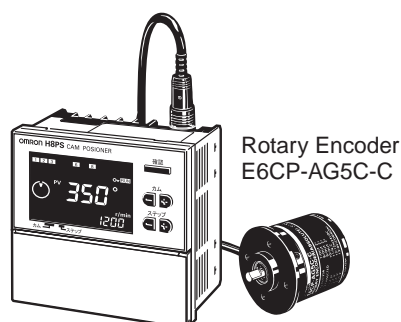

Note: The E6CP-AG5C cannot be connected to the H8PS.

Ordering Information

| Model |
|------------|
| H8PS-8A |
| H8PS-8AP |
| H8PS-8AF |
| H8PS-8AFP |
| H8PS-16A |
| H8PS-16AP |
| H8PS-16AF |
| H8PS-16AFP |
| H8PS-32A |
| H8PS-32AP |
| H8PS-32AF |
| H8PS-32AFP |

Specifications

| | |
|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rated voltage | 24 VDC |
| Cam precision | 0.5° (for 720 resolution), 1° (for 256/360 resolution) |
| No. of output points | 8-point output type: 8 cam outputs, 1 RUN output, 1 pulse output 16-point output type: 16 cam outputs, 1 RUN output, 1 pulse output 32-point output type: 32 cam outputs, 1 RUN output, 1 pulse output |
| Encoder response | RUN mode, test mode: 256/360 resolution 1,600 r/min max. (1,200 r/min when advance compensation is set for four cams or more) 720 resolution 800 r/min max. (600 r/min when advance compensation is set for four cams or more) |
| Additional functions | <ul style="list-style-type: none"> • Origin compensation (zeroing) • Rotation direction switching • Angle display switching • Teaching • Pulse output • Angle/number of rotations display switching • Puncture * • Angle advance • Number of rotations alarm output • Setting with support software (order separately) * |

Note: For 16-point and 32-point output types only

Safety Precautions

Refer to *Warranty and Limitations of Liability*.

⚠ WARNING

This product is not designed or rated for ensuring safety of persons either directly or indirectly. Do not use it for such purposes.



Precautions for Correct Use

Do not use the Encoder under ambient conditions that exceed the ratings.

● **Mounting**

For front-surface mounting, the maximum tightening torque is 1.76 N·m. (Effective screw length: 7 mm min.)

● **Wiring**

Spurious pulses may be generated for outputs when power is turned ON. Wait at least 1 s after turning ON the power to the Encoder before using the connected device.

● **Connection**

Spurious pulses may be generated when power is turned ON and OFF. Wait at least 1 s after turning ON the power to the Encoder before using the connected device, and stop using the connected device at least 1 s before turning OFF the power to the Encoder. Also, turn ON the power to the load only after turning ON the power to the Encoder.



(Unit: mm)

Dimensions

Tolerance class IT16 applies to dimensions in this datasheet unless otherwise specified.



Encoder

E6CP-AG3C
E6CP-AG5C

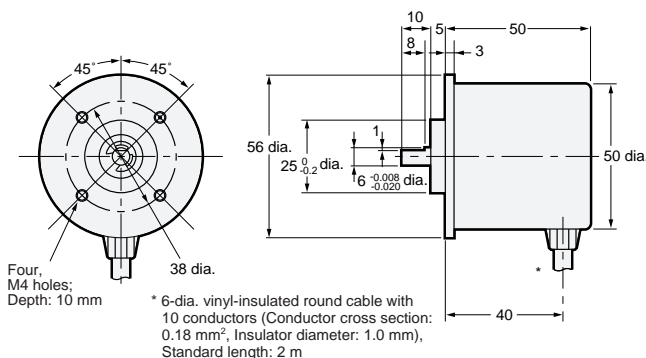

The E69-C06B Coupling is provided.

E6CP-AG5C-C

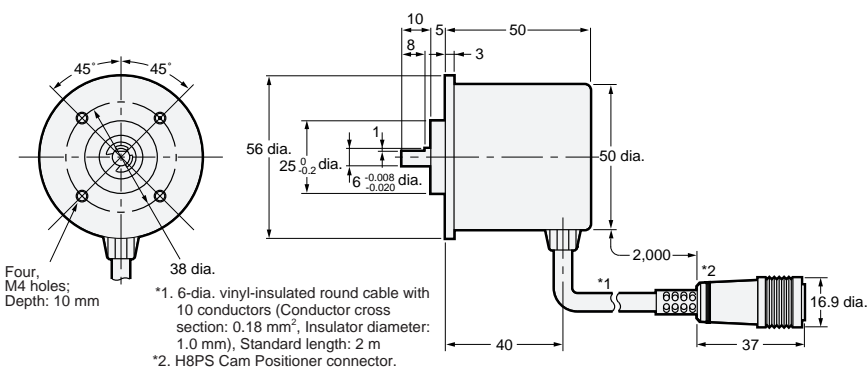




The E69-C06B Coupling is sold separately.

Accessories (Order Separately)

Servo Mounting Bracket

E69-2



Mounting Bracket Installation



Note: Provided with the product.

Extension Cable

E69-DF5



- *1. 6-dia. shielded cable with 12 conductors (Conductor cross section: 0.2 mm², Insulator diameter: 1.1 mm), Standard length: 5 m
- *2. Connects to connector on E6CP-AG5C-C.
- *3. Connects to H8PS Cam Positioner.

Note: 1. The E69-DF5 (5 m) is also available with the following cable lengths: 10 m, 15 m, 20 m, and 98 m.
2. Cable can be extended to 100 m when the H8PS Cam Positioner is connected.

Couplings

E69-C06B

E69-C68B

E69-C610B

E69-C06M

Refer to *Accessories* for details.

Terms and Conditions Agreement

Read and understand this catalog.

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

Warranties.

(a) Exclusive Warranty. Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied.

(b) Limitations. OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE.

Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty.

See <http://www.omron.com/global/> or contact your Omron representative for published information.

Limitation on Liability: Etc.

OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY.

Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.

Suitability of Use.

Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT(S) IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

Programmable Products.

Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.

Performance Data.

Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.

Change in Specifications.

Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.

Errors and Omissions.

Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.

2019.4

In the interest of product improvement, specifications are subject to change without notice.

OMRON Corporation
Industrial Automation Company

<http://www.ia.omron.com/>

(c)Copyright OMRON Corporation 2019 All Right Reserved.



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk