


I/O Block Base G70A

Reduces Wiring while Providing I/O Flexibility

- Mount I/O relays and I/O SSRs freely.
- Electric-shock preventive (finger-touch protection) terminal block incorporated conforming to VDE 0160.
- Connects to the PC and SBC easily via a connector.
- DIN track mounted.
- I/O Block conforming to VDE 0160.

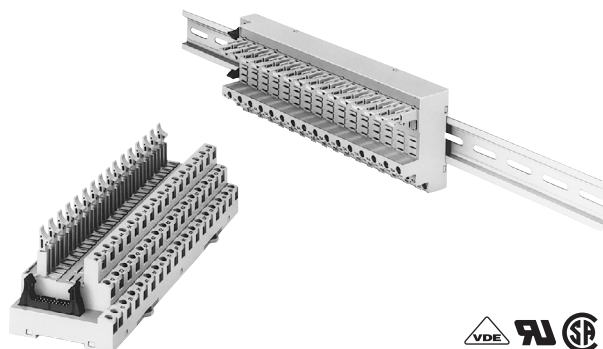

Ordering Information

■ List of Models

Classification	Internal I/O circuit common	Rated voltage	Model
Output	NPN (+ common)	24 VDC	G70A-ZOC16-3
	PNP (- common)	24 VDC	G70A-ZOC16-4
Input	NPN/PNP	110 VDC max., 240 VAC max. (See note)	G70A-ZIM16-5

Note: Each relay to be mounted must incorporate a coil that has proper specifications within the maximum rated voltage range.

■ Suitable Relay/SSR

Classification	I/O Block Base	PCB Relay	Solid State Relay
Output	NPN:G70A-ZOC16-3 PNP:G70A-ZOC16-4	G2R-1-S G2R-1-SN	G3R-OA202SZN
			G3R-OA202SLN
Input	G70A-ZIM16-5	G2R-1A3-SN G2R-13-SN G2R-1A3-SND G2R-13-SND	G3R-ODX02SN
			G3R-OD201SN
			G3RZ-201SLN
			H3RN-1
			H3RN-11
			G3R-IAZR1SN
			G3R-IDZR1SN
			G3R-IDZR1SN-1

Note: G2R-13-SN has twin cross-bar contacts.

■ Connecting Sockets for I/O Terminal Expansion

Model	Number of poles
P2RF-05-E	1 pole (G2R: 1 pole usage)
P2RF-08-E	2 poles (G2R: 2 poles usage)

■ Accessories (Order Separately)

G78-16-E Short Bar

Applicable model	Model
G70A-ZOC16-3	G78-16-E
G70A-ZOC16-4	
G70A-ZIM16-5	

Specifications

■ Ratings/Characteristics

Item	G70A-ZOC16-3	G70A-ZOC16-4	G70A-ZIM16-5
Contact resistance	10 mΩ (excluding the resistance of the relay to be used)		
Permissible current	10 A		100 mA
Max. operating voltage	380 VAC, 125 VDC		30 VDC
Dielectric strength	4,000 VAC, 50/60 Hz for 1 min between connector and output terminals 2,000 VAC, 50/60 Hz for 1 min between output terminals 250 VAC, 50/60 Hz for 1 min between connectors		4,000 VAC, 50/60 Hz for 1 min between connector and input terminals 2,000 VAC, 50/60 Hz for 1 min between coil terminals 250 VAC, 50/60 Hz for 1 min between connectors
Insulation resistance	Between connector and I/O terminals: 1,000 MΩ (at 500 V) Other: 100 MΩ (at 500 V)		
Vibration resistance	Malfunction: 10 to 61.2 to 10 Hz, 0.1-mm single amplitude (0.2-mm double amplitude); 61.2 to 150 to 61.2 Hz, 14.7 m/s ²		
Shock resistance	Malfunction: 200 m/s ²		
Noise immunity	Noise level: 2.0 kV; pulse width: 100 ns to 1 μs		
Ambient temperature	Operating: 0°C to 55°C (with no icing)		
Ambient humidity	Operating: 35% to 85%		
Coil surge absorption element	Diode: 1 A, 400 V		Varistor (see note)
Protection diode for inverse connection	Diode (2 A, withstand inverse voltage: 40 V)		
Tightening torque	0.59 N·m		

Note: Use a DC relay with a built-in diode because a DC relay without a built-in diode does not absorb any coil surge.

■ Relay (G2R-1-S, G2R-1-SN)

Coil Ratings

Rated voltage	24 VDC	
Rated current	21.8 mA	
Coil resistance	1,100 Ω	
Coil inductance	Armature OFF	4.27
(H) (ref. value)	Armature ON	8.55
Must operate voltage	70% min. of rated voltage	
Must release voltage	15% min. of rated voltage	
Max. voltage	110% of rated voltage	
Power consumption	Approx. 0.53 W	

Contact Ratings

Number of poles	1 pole	
Load	Resistive load ($\cos\phi = 1$)	Inductive load ($\cos\phi = 0.4$; L/R = 7 ms)
Rated load	10 A at 250 VAC; 10 A at 30 VDC	7.5 A at 250 VAC; 5 A at 30 VDC
Rated carry current	10 A	
Max. operating voltage	380 VAC, 125 VDC	
Max. operating current	10 A	
Max. switching capacity	2,500 VA, 300 W	1,875 VA, 150 W
Min. permissible load	100 mA at 5 VDC	

■ Relay (G2R-1A3-SN (SND), G2R-13-SN (SND))

Coil Ratings

Rated voltage		230 VAC	12 VDC	24 VDC
Rated current	50 Hz	3.7 mA	43.6 mA	21.8 mA
	60 Hz	3.1 mA		
Coil resistance		30,000 Ω	275 Ω	1,100 Ω
Must operate voltage		80% max. of rated voltage	70% max. of rated voltage	
Must release voltage		30% min. of rated voltage	15% min. of rated voltage	
Max. voltage		110% of rated voltage		
Power consumption		Approx. 0.7 W (60 Hz)	Approx. 0.53 W	

Note: 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of $+15\%/_{-20\%}$ (AC rated current) or $\pm 10\%$ (DC coil resistance).

2. LEDs are used for the built-in operation indicator. For models equipped with these indications, the VAC rated current must be increased by approximately 1 mA; the VDC rated current, by approximately 4 mA.

3. Operating characteristics are measured at a coil temperature of 23°C.

Contact Ratings

Refer to Ratings/Characteristics of G70A-ZIM16-5.

■ SSR

Ratings

Input Module

Input

Model	Rated voltage	Operating voltage	Input current	Must operate voltage	Must release voltage
G3R-IAZR1SN	100 to 240 VAC	60 to 264 VAC	15 mA max.	60 VAC max.	20 VAC min.
G3R-IDZR1SN	5 VDC	4 to 6 VDC	8 mA max.	4 VDC max.	1 VDC min.
	12 to 24 VDC	6.6 to 32 VDC		6.6 VDC max.	3.6 VDC min.
G3R-IDZR1SN-1	5 VDC	4 to 6 VDC		4 VDC max.	1 VDC min.
	12 to 24 VDC	6.6 to 32 VDC		6.6 VDC max.	3.6 VDC min.

Output

Model	Logic level supply voltage	Logic level supply current
G3R-IAZR1SN	4 to 32 VDC	0.1 to 100 mA
G3R-IDZR1SN		
G3R-IDZR1SN-1		

Output Module

Input

Model	Rated voltage	Operating voltage	Input current	Must operate voltage	Must release voltage
G3R-OA202SZN	5 to 24 VDC	4 to 32 VDC	15 mA max. (at 25°C)	4 VDC max.	1 VDC min.
G3R-OA202SLN			8 mA max.		
G3R-ODX02SN					
G3R-OD201SN					

Output

Model	Load voltage	Load current (see note)	Inrush current
G3R-OA202SZN	75 to 264 VAC	0.05 to 2 A	30 A (60 Hz, 1 cycle)
G3R-OA202SLN			
G3R-ODX02SN	4 to 60 VDC	0.01 to 2 A	8 A (10 ms)
G3R-OD201SN	40 to 200 VDC	0.01 to 1.5 A	8 A (10 ms)

Note: The minimum current value is measured at 10°C min.

■ Characteristics

Input Module

Item	G3R-IAZR1SN	G3R-IDZR1SN	G3R-IDZR1SN-1
Operate time	20 ms max.	0.1 ms max.	15 ms max.
Release time	20 ms max.	0.1 ms max.	15 ms max.
Response frequency	10 Hz	1 kHz	10 Hz
Output ON voltage drop	1.6 V max.		
Leakage current	5 μ A max.		
Insulation resistance	100 M Ω min. between input and output		
Dielectric strength	4,000 VAC, 50/60 Hz for 1 min between input and output		
Vibration resistance	10 to 55 to 10 Hz, 0.75-mm single amplitude (1.5-mm double amplitude)		
Shock resistance	1,000 m/s ²		
Ambient temperature	Operating: -30°C to 80°C (with no icing) Storage: -30°C to 100°C (with no icing)		
Approved standards	UL508 File No. E64562 CSA C22.2 (No. 14, No. 950) File No. LR35535 TÜV File No. R9650094 (EN60950)		
Ambient humidity	Operating: 45% to 85%		
Weight	Approx. 18 g		


Output Module

Item	G3R-OA202SZN	G3R-OA202SLN	G3R-ODX02SN	G3R-OD201SN
Operate time	1/2 of load power source cycle + 1 ms max.	1 ms max.		
Release time	1/2 of load power source cycle + 1 ms max.		2 ms max.	
Response frequency	20 Hz		100 Hz	
Output ON voltage drop	1.6 V max.			2.5 V max.
Leakage current	1.5 mA max.		1 mA max.	
Insulation resistance	100 M Ω min. between input and output			
Dielectric strength	4,000 VAC, 50/60 Hz for 1 min between input and output			
Vibration resistance	10 to 55 to 10 Hz, 0.75-mm single amplitude (1.5-mm double amplitude)			
Shock resistance	1,000 m/s ²			
Ambient temperature	Operating: -30°C to 80°C (with no icing) Storage: -30°C to 100°C (with no icing)			
Approved standards	UL508 File No. E64562 CSA C22.2 (No. 14, No. 950) File No. LR35535 TÜV File No. R9650094 (EN60950)			
Ambient humidity	Operating: 45% to 85%			
Weight	Approx. 18 g			

Engineering Data


■ When Mounted to a G2R

Endurance

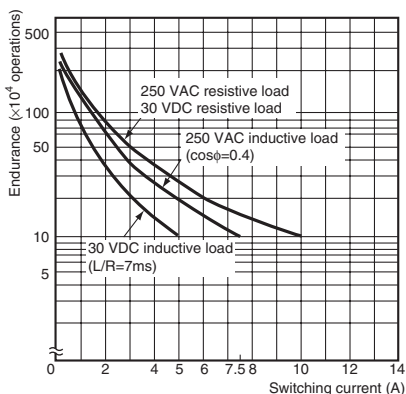

Maximum Switching Power

G2R-1A-S (24 VDC)

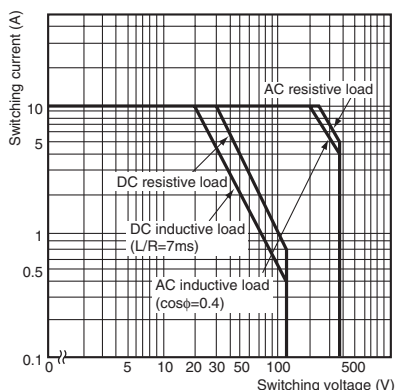


Note: The characteristics shown here are for 16-point mounting. This data was produced from actual values sampled on production lines, and should be used for reference purposes only. Since relays are mass-produced, a certain amount of tolerance is generally allowed in their application.

■ When Mounted to a G3RZ

Load Current vs. Ambient Temperature


G3RZ-201SLN

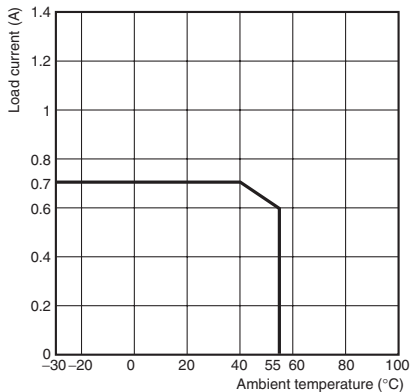

Inrush Current Resistivity

Non-repetitive (Keep the inrush current to half the rated value if it occurs repetitively.)


G3RZ-201SLN

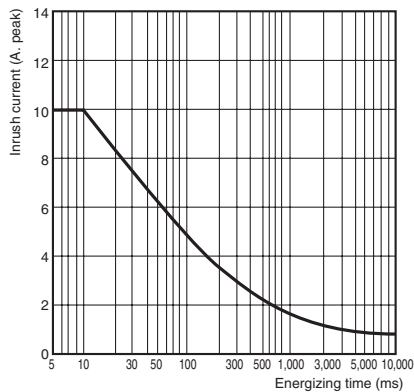


■ When Mounted to a G3R

Load Current vs. Ambient Temperature


G3R-OA202SZN
G3R-OA202SLN

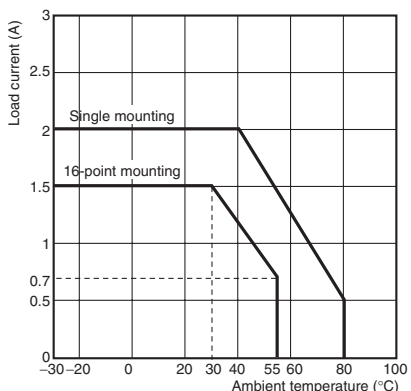

G3R-ODX02SN

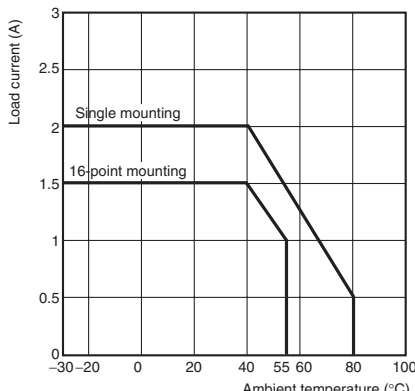


G3R-OD201SN

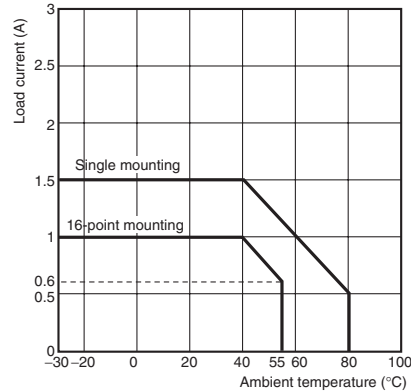


Inrush Current Resistivity

Non-repetitive (Keep the inrush current to half the rated value if it occurs repetitively.)


G3R-OA202SZN
G3R-OA202SLN

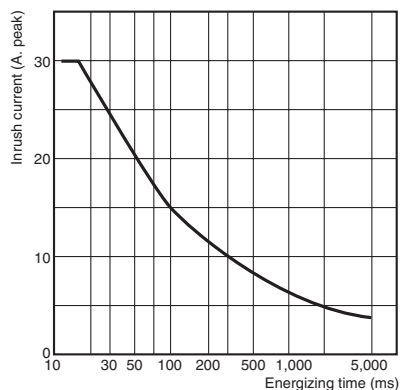

G3R-ODX02SN

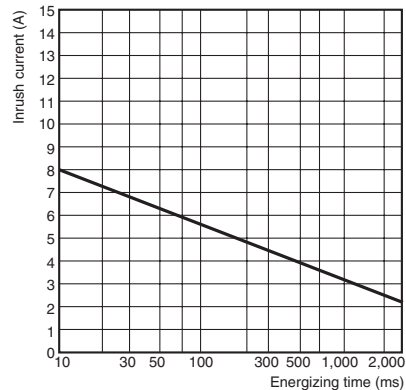


G3R-OD201SN

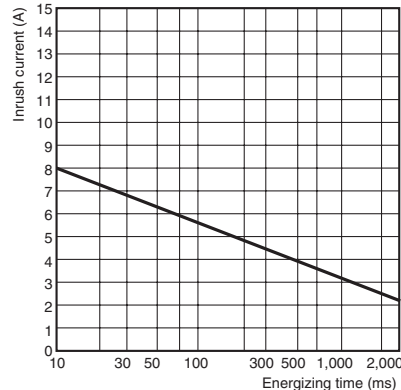


Dimensions

Note: All units are in millimeters unless otherwise indicated.

G70A-ZOC16 (Output)

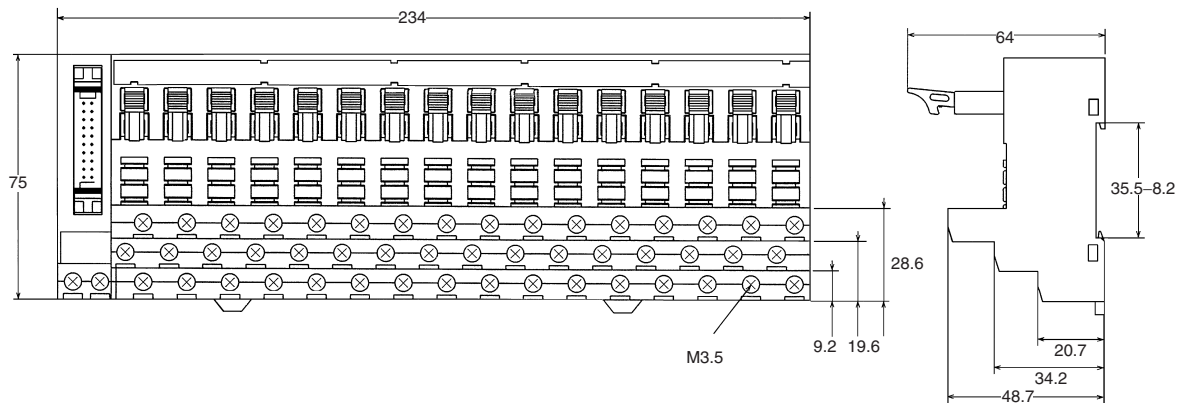


G70A-ZIM16 (Input)

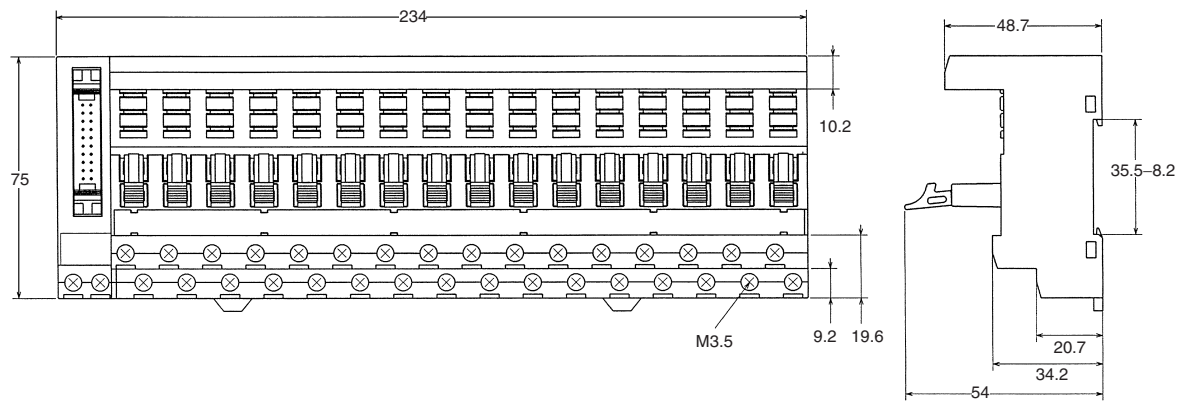


Terminal Arrangement/Internal Connection


G70A-ZOC16-3 (NPN)

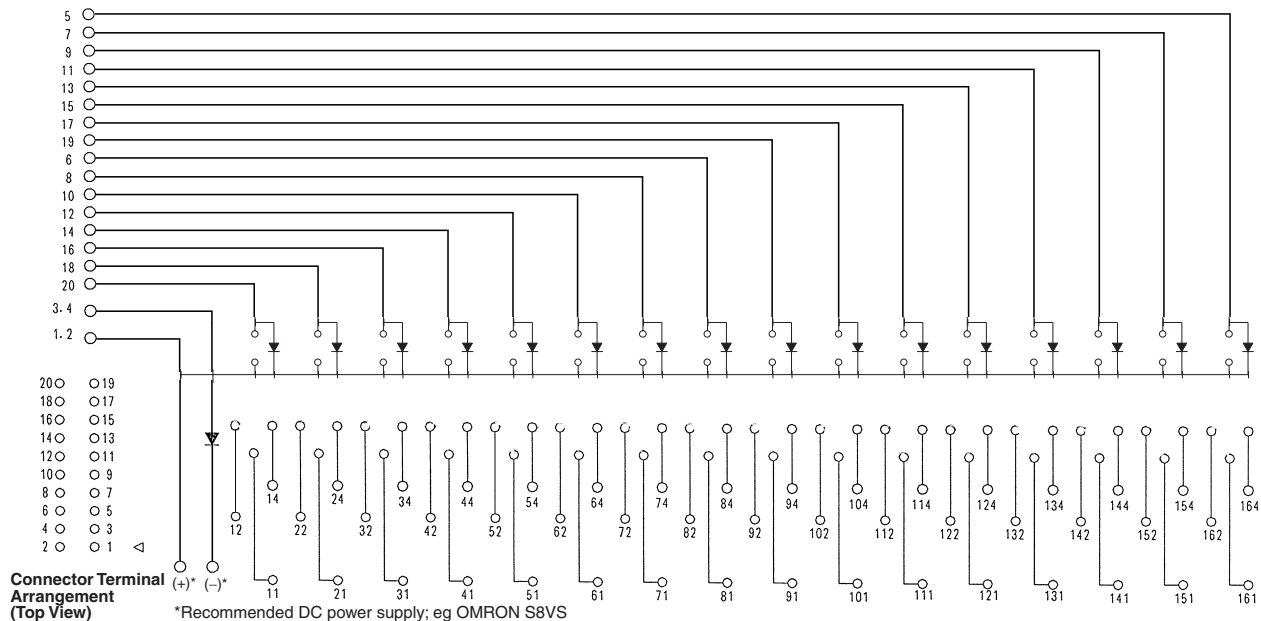


G70A-ZOC16-4 (PNP)

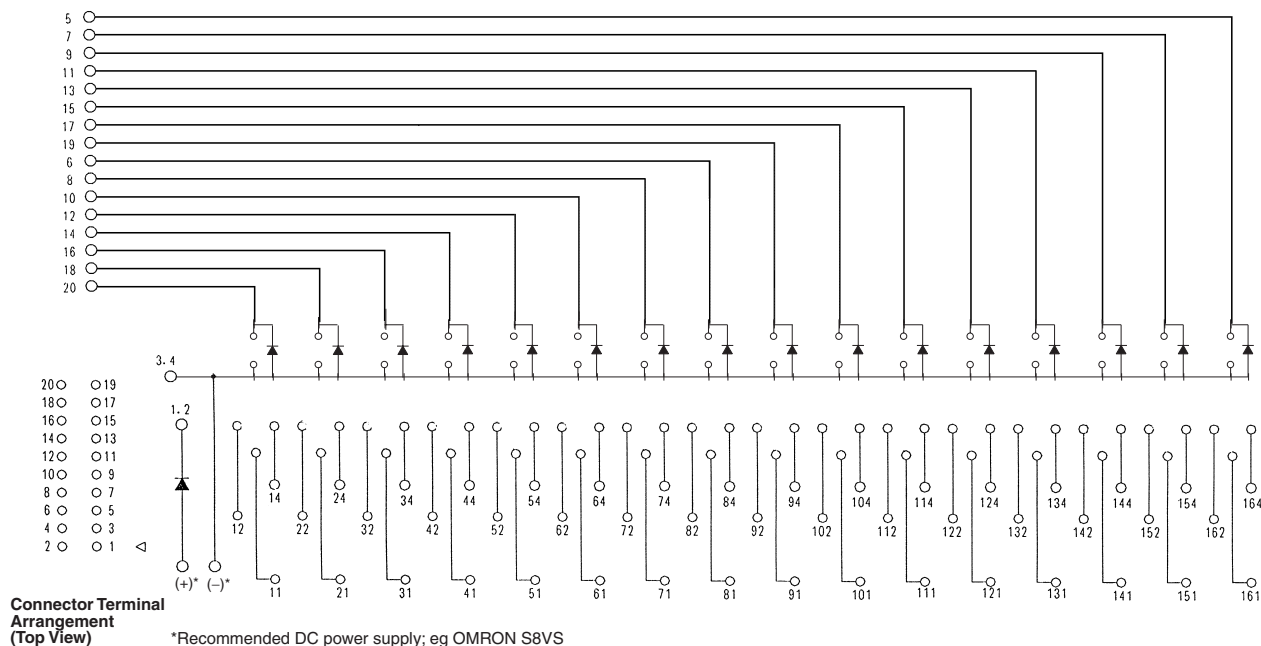

G70A-ZIM16-5 (NPN/PNP)

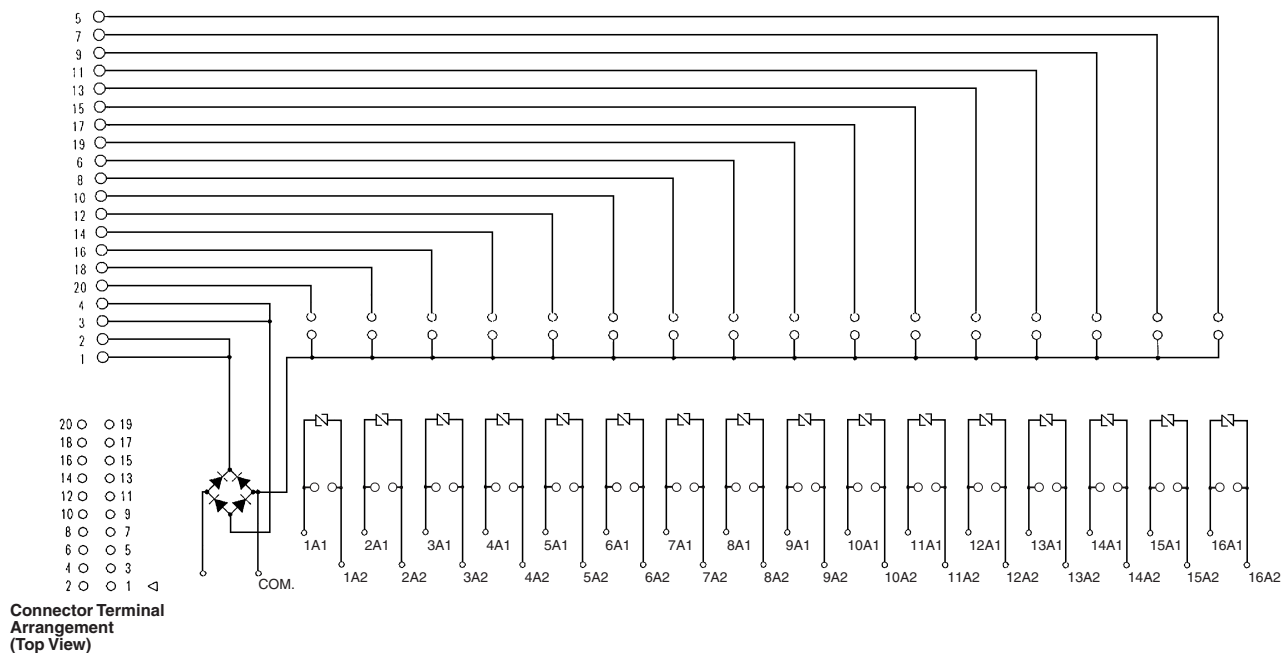

When mounted to a G2R-1-S

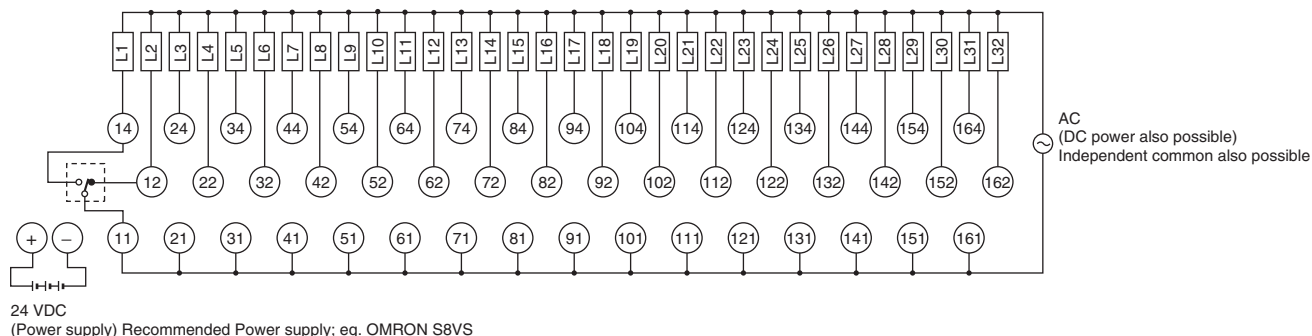

Note: The above diagram shows the Unit mounted to a G2R-1-S.
 When mounting to a G3R-OA□ or G3RZ-201SLN, pins 11 to 14 are output terminals.
 When mounting to a G3R-OD□, pin 14 is a plus terminal and pin 11 is a minus terminal. When mounting to G3RZ-201SLN, there is no polarity.

Cat. No. J087-E1-03 **In the interest of product improvement, specifications are subject to change without notice.**

OMRON EUROPE B.V.

Wegalaan 67-69,
 NL-2132 JD, Hoofddorp,
 The Netherlands
 Phone: +31 23 568 13 00
 Fax: +31 23 568 13 88
 www.eu.omron.com



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk