

DATASHEET - SWD4-FFR-PF1-1

Feeder module, SmartWire-DT, supply for contactors/cards of a local SWD segment

Part no. SWD4-FFR-PF1-1
Catalog No. 168880
Alternate Catalog No. SWD4-FFR-PF1-1

**Delivery program**

| | | | |
|----------------------------|--|--|---|
| Product range | | | SmartWire-DT accessories |
| Basic function | | | Cable adapters |
| Function | | | SWD power supply module |
| Description | | | SWD power supply module for modules (IP20) on a local SWD segment |
| Connection to SmartWire-DT | | | yes |

Technical data**General**

| | | | |
|------------------------|---|----|--|
| Standards | | | IEC/EN 61131-2 EN 50178 |
| Dimensions (W x H x D) | | mm | 71.5 x 90 x 45 |
| Weight | | kg | 0.11 |
| Mounting | | | Top-hat rail IEC/EN 60715, 35 mm or screw fixing using fixing brackets ZB4-101-GF1 (accessories) |
| Mounting position | | | As required |
| Power loss | P | W | 2.6 |

Ambient conditions, mechanical

| | | | |
|--|--|---------|------|
| Protection type (IEC/EN 60529, EN50178, VBG 4) | | | IP20 |
| Vibrations (IEC/EN 61131-2:2008) | | | |
| Constant amplitude 3,5 mm | | Hz | |
| constant amplitude 0.15 mm max. | | Hz | 8.4 |
| Constant amplitude 0.15 mm min. (RefExtrakt) | | Hz | 5 |
| Constant acceleration 1 g | | Hz | |
| constant acceleration 1 g max. | | Hz | 150 |
| constant acceleration 1 g min. | | Hz | 8.4 |
| Mechanical shock resistance (IEC/EN 60068-2-27) semi-sinusoidal 15 g/11 ms | | Impacts | 9 |

Electromagnetic compatibility (EMC)

| | | | |
|---|--|----|---|
| Electrostatic discharge (IEC/EN 61131-2:2008) | | | |
| Air discharge (Level 3) | | kV | 8 |
| Contact discharge (Level 2) | | kV | 4 |

Climatic environmental conditions

| | | | |
|---|---|-----|--|
| Climatic proofing | | | Dry heat to IEC 60068-2-2 Damp heat as per EN 60068-2-3 |
| Air pressure (operation) | | hPa | 795 - 1080 |
| Ambient temperature | | | |
| Operation | θ | °C | -25 - +55 |
| Storage / Transport | θ | °C | -40 - +70 |
| Relative humidity | | | |
| Condensation | | | Take appropriate measures to prevent condensation |
| Relative humidity, non-condensing (IEC/EN 60068-2-30) | | % | 0 - 95 |

Connection options

| | | | |
|----------------------------|--|--|-------------------|
| Connection 1 | | | Plug, 8-pole |
| Number of insertion cycles | | | ≥ 200 |
| Connection 2 | | | Push in terminals |

Design verification as per IEC/EN 61439

| | | | |
|--|-------|---|---|
| Technical data for design verification | | | |
| Rated operational current for specified heat dissipation | I_n | A | 0 |

| | | | |
|--|-------------------|----|--|
| Heat dissipation per pole, current-dependent | P _{vid} | W | 0 |
| Equipment heat dissipation, current-dependent | P _{vid} | W | 0 |
| Static heat dissipation, non-current-dependent | P _{vs} | W | 2.6 |
| Heat dissipation capacity | P _{diss} | W | 0 |
| Operating ambient temperature min. | | °C | -25 |
| Operating ambient temperature max. | | °C | 55 |
| Degree of Protection | | | IP20 |
| IEC/EN 61439 design verification | | | |
| 10.2 Strength of materials and parts | | | |
| 10.2.2 Corrosion resistance | | | Meets the product standard's requirements. |
| 10.2.3.1 Verification of thermal stability of enclosures | | | Meets the product standard's requirements. |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat | | | Meets the product standard's requirements. |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects | | | Meets the product standard's requirements. |
| 10.2.4 Resistance to ultra-violet (UV) radiation | | | Meets the product standard's requirements. |
| 10.2.5 Lifting | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.6 Mechanical impact | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.7 Inscriptions | | | Meets the product standard's requirements. |
| 10.3 Degree of protection of ASSEMBLIES | | | Meets the product standard's requirements. |
| 10.4 Clearances and creepage distances | | | Meets the product standard's requirements. |
| 10.5 Protection against electric shock | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.6 Incorporation of switching devices and components | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.7 Internal electrical circuits and connections | | | Is the panel builder's responsibility. |
| 10.8 Connections for external conductors | | | Is the panel builder's responsibility. |
| 10.9 Insulation properties | | | |
| 10.9.2 Power-frequency electric strength | | | Is the panel builder's responsibility. |
| 10.9.3 Impulse withstand voltage | | | Is the panel builder's responsibility. |
| 10.9.4 Testing of enclosures made of insulating material | | | Is the panel builder's responsibility. |
| 10.10 Temperature rise | | | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating | | | Is the panel builder's responsibility. |
| 10.12 Electromagnetic compatibility | | | Is the panel builder's responsibility. |
| 10.13 Mechanical function | | | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed. |

Technical data ETIM 7.0


PLC's (EG000024) / Fieldbus, decenter. periphery - power supply/segment module (EC001600)

Electric engineering, automation, process control engineering / Control / Field bus, decentralized peripheral / Field bus, decentralized peripheral - feed and segment module (ecl@ss10.0.1-27-24-26-10 [BAA071013])

| | | |
|---|---|-------------|
| Supply voltage AC 50 Hz | V | 0 - 0 |
| Supply voltage AC 60 Hz | V | 0 - 0 |
| Supply voltage DC | V | 20.4 - 28.8 |
| Voltage type of supply voltage | | DC |
| Number of HW-interfaces industrial Ethernet | | 0 |
| Number of interfaces PROFINET | | 0 |
| Number of HW-interfaces RS-232 | | 0 |
| Number of HW-interfaces RS-422 | | 0 |
| Number of HW-interfaces RS-485 | | 0 |
| Number of HW-interfaces serial TTY | | 0 |
| Number of HW-interfaces parallel | | 0 |
| Number of HW-interfaces Wireless | | 0 |
| Number of HW-interfaces USB | | 0 |
| Number of HW-interfaces other | | 3 |
| With optical interface | | No |
| Supporting protocol for TCP/IP | | No |
| Supporting protocol for PROFIBUS | | No |

| | | |
|--|----|-------------------------|
| Supporting protocol for CAN | | No |
| Supporting protocol for INTERBUS | | No |
| Supporting protocol for ASI | | No |
| Supporting protocol for KNX | | No |
| Supporting protocol for MODBUS | | No |
| Supporting protocol for Data-Highway | | No |
| Supporting protocol for DeviceNet | | No |
| Supporting protocol for SUCONET | | No |
| Supporting protocol for LON | | No |
| Supporting protocol for PROFINET IO | | No |
| Supporting protocol for PROFINET CBA | | No |
| Supporting protocol for SERCOS | | No |
| Supporting protocol for Foundation Fieldbus | | No |
| Supporting protocol for EtherNet/IP | | No |
| Supporting protocol for AS-Interface Safety at Work | | No |
| Supporting protocol for DeviceNet Safety | | No |
| Supporting protocol for INTERBUS-Safety | | No |
| Supporting protocol for PROFIsafe | | No |
| Supporting protocol for SafetyBUS p | | No |
| Supporting protocol for other bus systems | | Yes |
| Radio standard Bluetooth | | No |
| Radio standard WLAN 802.11 | | No |
| Radio standard GPRS | | No |
| Radio standard GSM | | No |
| Radio standard UMTS | | No |
| System accessory | | Yes |
| Degree of protection (IP) | | IP20 |
| Type of electric connection | | Flat plug-in connection |
| With potential separation | | No |
| With power supply module | | Yes |
| Suitable as segment module | | Yes |
| Remote module | | No |
| Fieldbus connection over separate bus coupler possible | | Yes |
| Bus diagnosis possible | | No |
| Rail mounting possible | | Yes |
| Wall mounting/direct mounting | | Yes |
| Front build in possible | | No |
| Rack-assembly possible | | No |
| Suitable for safety functions | | No |
| Category according to EN 954-1 | | |
| SIL according to IEC 61508 | | None |
| Performance level acc. EN ISO 13849-1 | | None |
| Appendant operation agent (Ex ia) | | No |
| Appendant operation agent (Ex ib) | | No |
| Explosion safety category for gas | | None |
| Explosion safety category for dust | | None |
| Width | mm | 71.5 |
| Height | mm | 90 |
| Depth | mm | 45 |

Dimensions

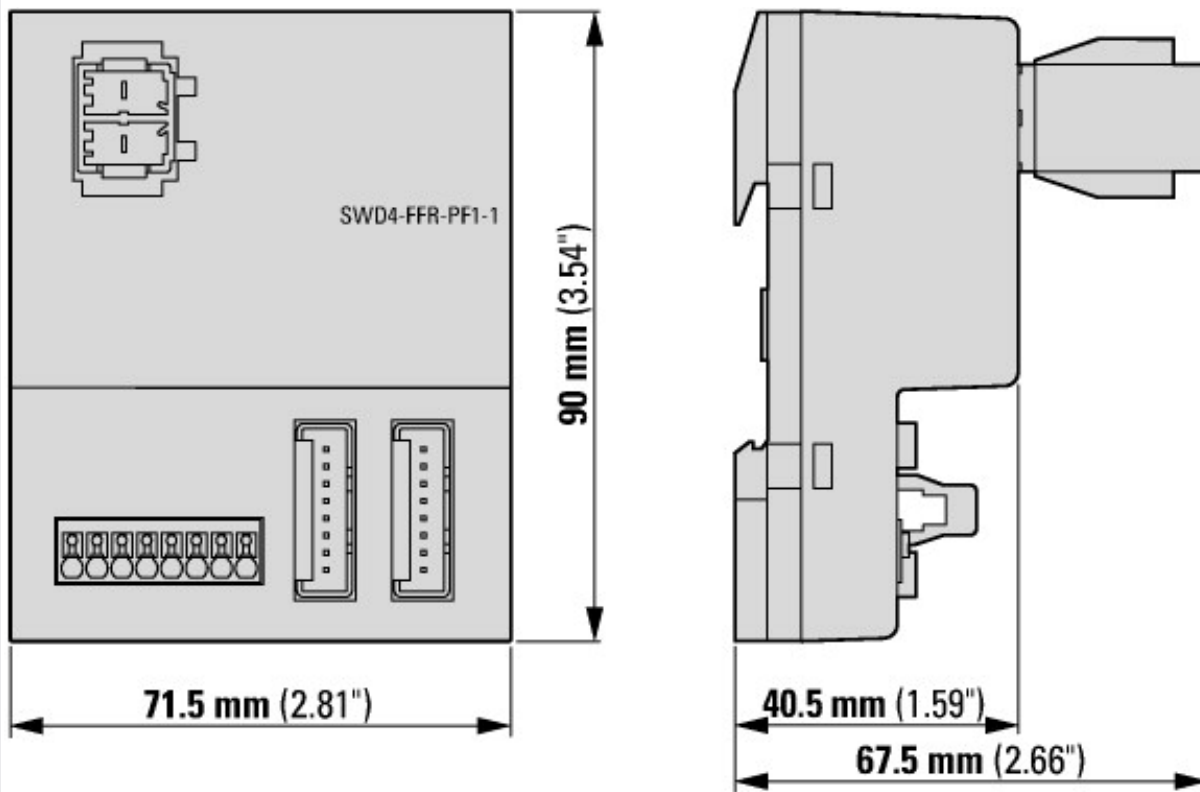

Cable adapters



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk