

## DATASHEET - FIM-40/4/0,3-A



RCD/RCB combination switch, 40A, 0.3A-LS\_Char, 4p, A-FI\_Char

Powering Business Worldwide™

Part no. **FIM-40/4/0,3-A**  
 Catalog No. **278515**  
 Alternate Catalog No. **FIM-40-4-0.3-A**

Similar to illustration

## Delivery program

Product range			FIM
Basic function			Residual-current protective modules
Rated fault current	$I_{\Delta N}$	mA	300
Rated uninterrupted current	$I_u$	A	40
Application			Rated fault current $I_{\Delta N} = 300$ mA
Rated current	$I_n$	A	40
Number of poles			4 pole
Contact sequence			

## Technical data

### Electrical

Standards			IEC/EN 61009
Rated operational voltage	$U_e$	V	
	$U_e$	V AC	230/400

### Mechanical

Standard front dimension		mm	45
Enclosure height		mm	90
Mounting			Permanent screw connection with FAZ
Terminals top and bottom			Lift terminals
Terminal protection			Protection against electric shock to IEC 536
Thickness of busbar material		mm	0.8 ... 2

## Design verification as per IEC/EN 61439


Technical data for design verification			
Rated operational current for specified heat dissipation	$I_n$	A	40
Heat dissipation per pole, current-dependent	$P_{vid}$	W	0
Equipment heat dissipation, current-dependent	$P_{vid}$	W	8.4
Static heat dissipation, non-current-dependent	$P_{vs}$	W	0
Heat dissipation capacity	$P_{diss}$	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	40
			0

## Technical data ETIM 7.0

Circuit breakers and fuses (EG000020) / Residual current circuit breaker (RCCB) module (EC002297)			
Electric engineering, automation, process control engineering / Electrical installation, device / Residual current protection system / Residual current circuit breaker (RCCB) module (ec1@ss10.0.1-27-14-22-10 [ACN357011])			
Nominal voltage		V	230 - 400
Nominal current		A	40
Rated fault current adjustable			No
Rated fault current		A	0.3 - 0.3
Max. delay time		ms	0

Delay adjustable		No
Number of poles		4
Leakage current type		A
Surge current capacity	kA	0.25
Frequency		50 Hz
Rated insulation voltage $U_i$	V	440
Rated impulse withstand voltage $U_{imp}$	kV	4
Connectable conductor cross section solid-core	mm <sup>2</sup>	1 - 25
Connectable conductor cross section multi-wired	mm <sup>2</sup>	1 - 25
Anti- nuisance tripping version		No
With interlocking device		No
Degree of protection (IP)		IP20
Pollution degree		2
Ambient temperature during operating	°C	-25 - 40

## Dimensions

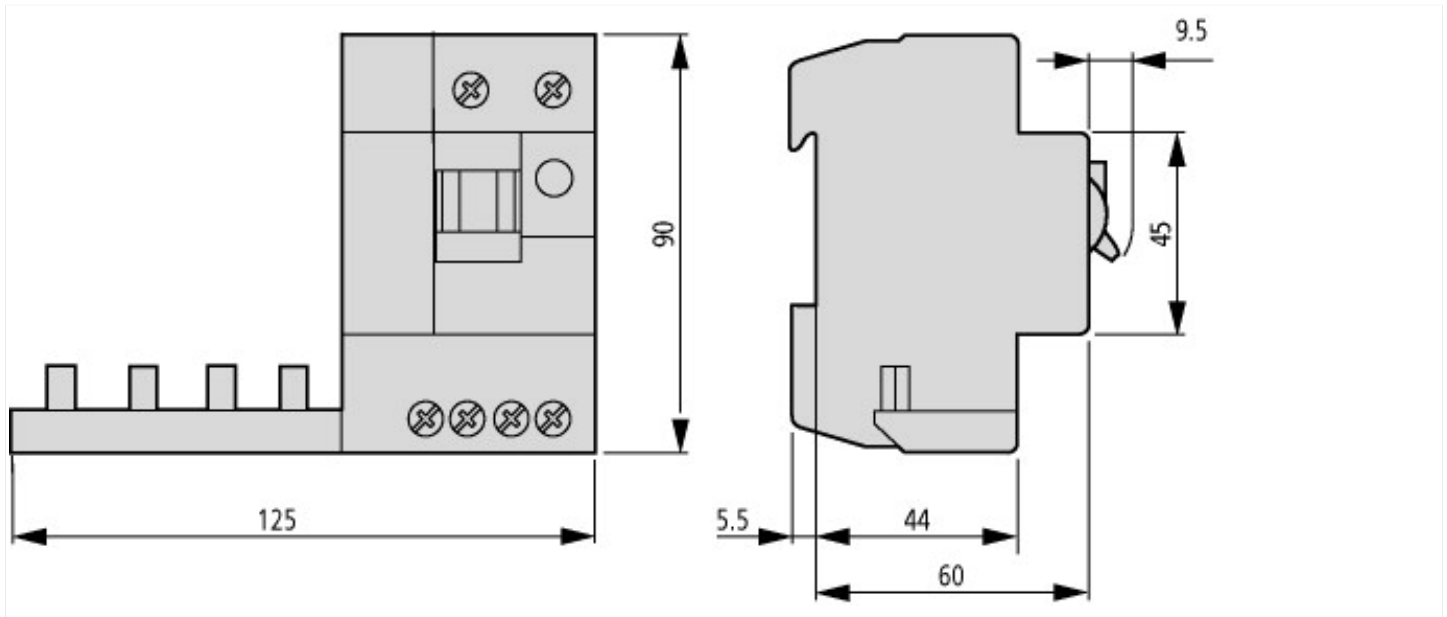



# SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

# [www.scatts.co.uk](http://www.scatts.co.uk)