

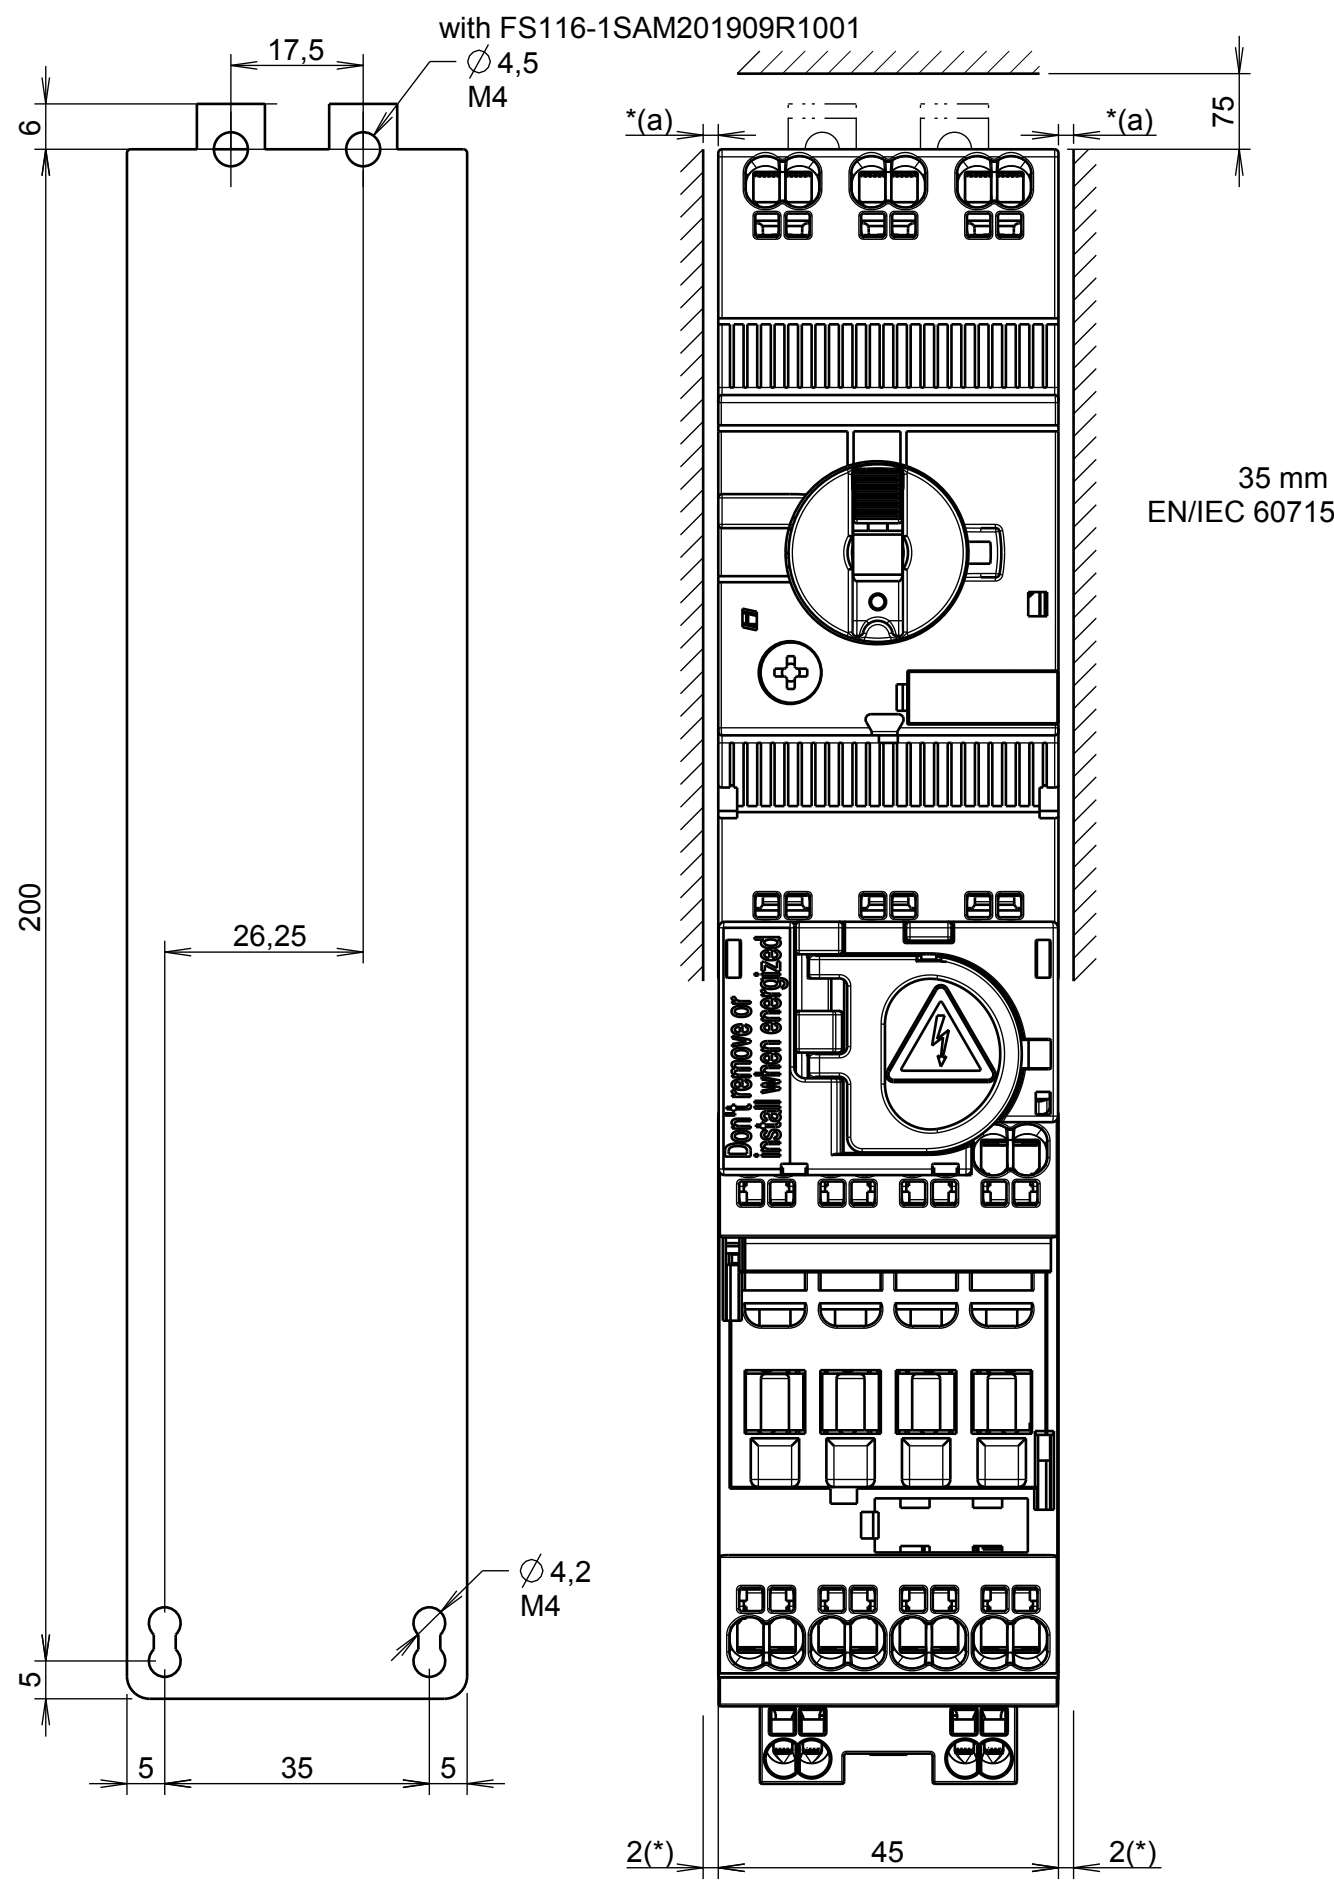


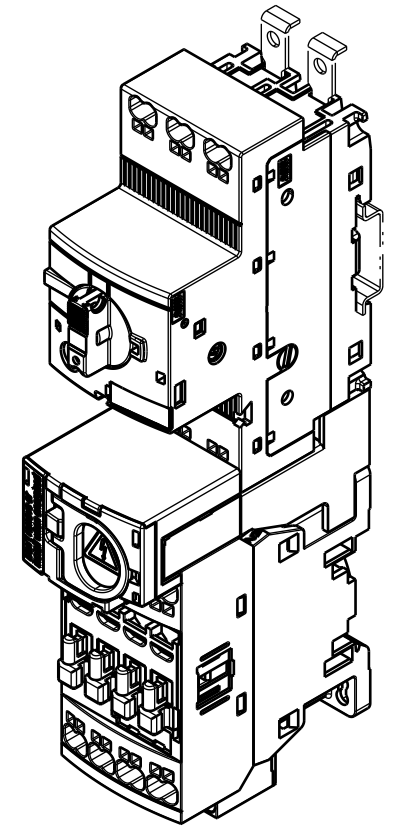

35 mm
EN/IEC 60715

(*) : Minimum distance to grounded component
*(a) = 1.5mm for Ue>400V

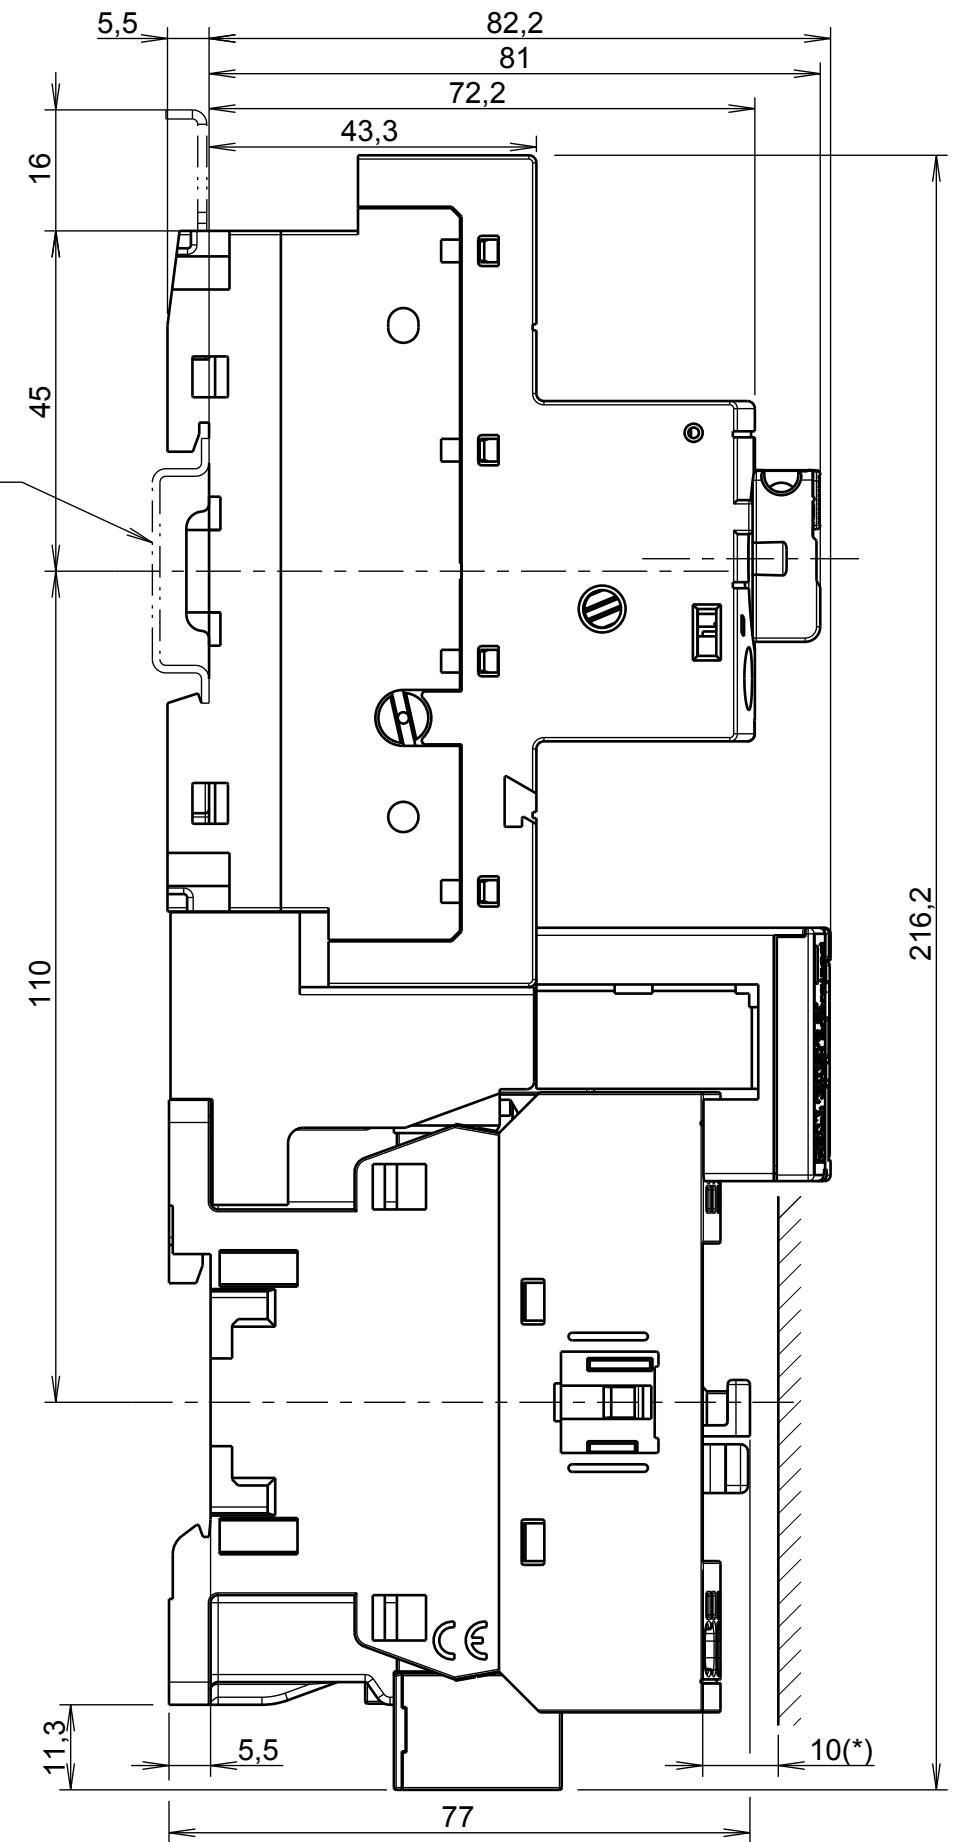

ECHELLE 1:2

Created by	KENNY PICCARD	Checked by	Stéphane BOVIS	Approved by	Eliane GODIE
Created on	2018-01-31	Checked on	2018-11-21	Approved on	2018-09-06
Comments	Creation		Folio: 1/2		
	ECN number	Approuvé	Language: FR/EN	Format: A3	Scale: 1:1
Title			PRT	1SBB505165R1101 A.8	
Title (en)			DRW	1SBB505165D3501 B.3	

4

3

2

1

4

3

2

1

Code article		Material		Heat treatment		Surface treatment		Finish	
1SBB505165R1101									
Created by	KENNY PICCARD		Checked by	Stephane BOVIS		Approved by	Eliane GODIE		
Created on	2018-01-31		Checked on	2018-11-21		Approved on	2018-09-06		
	Comments	Creation						Folio: 2/2	
	ECN number		Approuvé	Language: FR/EN		Format: A3	Scale: 1:1	PRU : FRFRA	
		Title				PRT 1SBB505165R1101 A.8			
		Title (en) DOL AF09-16K+BEAK+MS132K				DRW 1SBB505165D3501 B.3			



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS


At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.

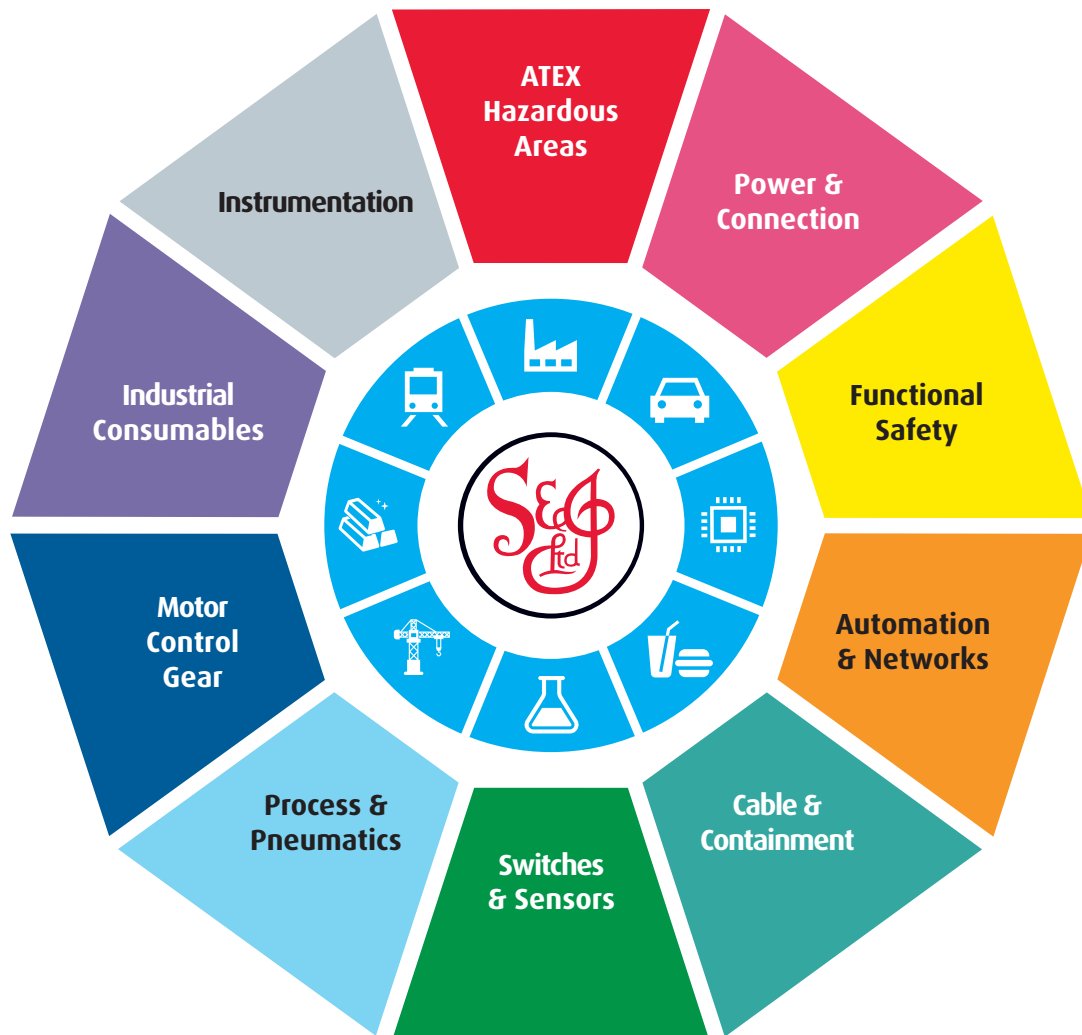

Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk