

Group II Cable Glands


Flameproof, Increased Safety, Dust Protection

Class - Zones - Divisions

Certified ATEX / IECEx / c CSA us

Application

- Outdoor or indoor use.
- For use with non-armoured elastomer and plastic insulated cables.
- For particular use with:-
 - Cable inner sheaths that are not effectively filled, compact and/or circular, have tape bedding or have hygroscopic fillers.
 - Cables that exhibit 'Cold Flow' characteristics.
 - Enclosures containing an ignition source in gas group IIC areas or containing an ignition source in a Zone 1 area and exceeding 2 litres in volume.
- See technical section for installation rules and regulations.

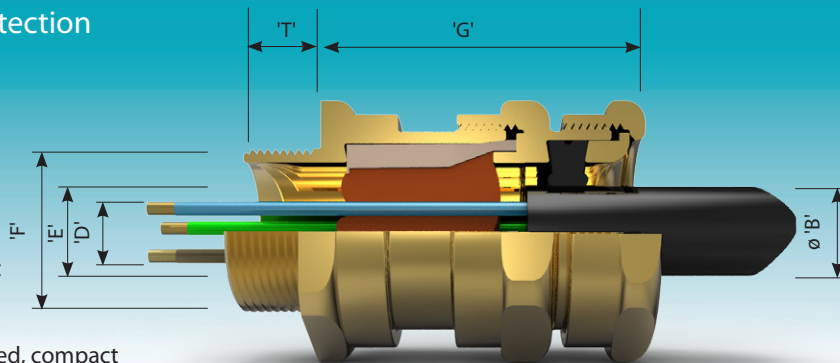

ICG 623

CABLE GLAND SELECTION TABLE

Size Ref.	Entry Thread Size 'F'		Cable Acceptance Details								'G'	Hexagon Dimensions	
			Inner Sheath / Cores				Outer Sheath 'B'					Across Flats	Across Corners
	Metric	NPT * Standard or Option	'D' Max. Over Cores	'E' Max. Inner Sheath	NOTE 1 Max. No. of Cores	NOTE 2 Max. No. of Cores	Standard Seal		Alternative Seal (S)				
Os	M20	½"	8.0	8.0	12	6	3.0	8.0	-	-	56.4	24.0	26.5
O	M20	½"	8.9	10.0	12	6	6.5	11.9	-	-	56.4	24.0	26.5
A	M20	¾" or ½"	11.0	12.5	15	10	10.0	14.3	8.5	13.4	55.8	30.0	32.5
B	M25	1" or ¾"	16.2	18.4	30	21	13.0	20.2	9.5	15.4	58.8	36.0	39.5
C	M32	1¼" or 1"	21.9	24.7	42	42	19.0	26.5	15.5	21.2	62.0	46.0	50.5
C2	M40	1½" or 1¼"	26.3	29.7	60	60	25.0	32.5	22.0	28.0	64.5	55.0	60.6
D	M50	2" or 1½"	37.1	41.7	80	80	31.5	44.4	27.5	34.8	72.8	65.0	70.8
E	M63	2½" or 2"	47.8	53.5	100	100	42.5	56.3	39.0	46.5	77.0	80.0	88.0
F	M75	3" or 2½"	59.0	66.2 / 65.3 ¹	120	120	54.5	68.2	48.5	58.3	80.7	95.0	104.0

¹ 'T' — Metric entry threads are 1.5mm pitch as standard, 15mm length of thread. All dimensions in millimetres (except * where dimensions are in inches). Note 1: ATEX / IECEx certification only - Note 2: All other certification.

¹ Smaller value is applicable when selecting reduced NPT entry option.

Technical Data

ATEX/IECEx

- Flameproof Exd IIC Gb, Increased Safety Exe IIC Gb and Dust Extb IIIC Db (Ex) II 2 GD.
- Certificate No's: Baseefa06ATEX0058X and IECEx BAS 06.0015X.
- Suitable for use in Zone 1, Zone 2, Zone 21, Zone 22 and in Gas Groups IIA, IIB and IIC.
- Construction and Test Standards: IEC/EN 60079-0, IEC/EN 60079-1, IEC/EN 60079-7 and IEC/EN 6079-31.
- Ingress Protection: IP66, IP67 and IP 68 (30 metres for 7 days) to IEC/EN 60529 and NEMA 4X.
- Deluge Protection to DTS01.
- Operating Temperature Range: -60°C to +80°C.
- Assembly Instruction Sheet: AI 305.

c CSA us

- Flameproof AExd IIC Gb, Increased Safety AExe IIC Gb and Dust AExtD Zone 21.
- Explosion-proof Class 1 Division 2 Groups ABCD, Class II Division 2 Groups EFG, Class III.
- Certificate No's: CSA1015065 for Marine Shipboard Cable.
- Construction and Test Standards: UL 60079-0, UL 60079-1, UL 60079-7, ISA 60079-31, CSA 22.2 No: 60079-0, CSA 22.2 No: 60079-1, CSA 22.2 No: 60079-7, CSA 22.2 No: 60079-31, UL 2225

Features

- Provides an inspectable, repairable barrier seal to the individual insulated cores within the cable, and prevents entry of the products of an explosion into the cable.
- Assembly of the cable gland compresses and distributes the compound evenly to create a barrier seal at the point of entry into the enclosure.
- Provides a cable retention seal onto the cables outer sheath.
- Manufactured in Brass (standard), Nickel Plated Brass, 316 Stainless Steel or Aluminium.
- Brass NPT entries are nickel plated as standard.

Ordering Information

Format for ordering is as follows:

Alternative Seal (S), add suffix S to ordering information.

Cable Gland Type	Size	Thread	Material	(Optional)
ICG 623	C	M32	Brass	S
ICG 623	C	1 ¼" NPT	Brass	S

Two part sealing compound and assembly instructions are supplied with the cable gland.



Alternative certification options available:



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk