

### Precise focussing and non-contact temperature measurement from $-50\text{ }^{\circ}\text{C}$ to $975\text{ }^{\circ}\text{C}$

#### Features:

- Low and high temperature measurements of smallest spots up from 0.9 mm
- Double laser aiming marks real spot location and spot size at any distance
- Optics 75:1 and 50:1 with selectable focus
- CT laser F (fast) for scanning of fast moving low temperature objects up from 9 ms response time
- Usable up to  $85\text{ }^{\circ}\text{C}$  ambient temperature without cooling and automatic laser switch off at  $50\text{ }^{\circ}\text{C}$
- Selectable analog outputs 0/4–20 mA, 0–5/ 10 V, thermocouple type K or J
- Optional plug in digital interfaces USB, RS232, RS485, CAN or Profibus DP



#### General specifications

Environmental rating	IP 65 (NEMA-4)
Ambient temperature <sup>1)</sup>	$-20 \dots 85\text{ }^{\circ}\text{C}$ (sensing head, $50\text{ }^{\circ}\text{C}$ with laser ON) $-20 \dots 85\text{ }^{\circ}\text{C}$ (electronics)
Storage temperature	$-40 \dots 85\text{ }^{\circ}\text{C}$ (sensing head) $-40 \dots 85\text{ }^{\circ}\text{C}$ (electronics)
Relative humidity	10–95 %, non condensing
Vibration (sensor)	IEC 68-2-6: 3 G, 11–200 Hz, any axis
Shock (sensor)	IEC 68-2-27: 50 G, 11 ms, any axis
Weight	600 g (sensing head) / 420 g (electronics)

#### Electrical specifications

Outputs / analog	Channel 1: 0/4–20 mA, 0–5/ 10 V, thermocouple J, K Channel 2: sensing head temperature ( $-40\text{ }^{\circ}\text{C} \dots 85\text{ }^{\circ}\text{C}$ as 0–5 V or 0–10 V), alarm output
Alarm output	24 V / 50 mA (open collector)
Optional	Relay: 2 x 60 V DC/ 42 V AC <sub>eff</sub> : 0.4 A; optically isolated
Outputs / digital	USB, RS232, RS485, CAN, Profibus DP, Ethernet (optional)
Output impedances	mA max. 500 $\Omega$ (with 5–36 V DC) mV min. 100 k $\Omega$ load impedance thermocouple 20 $\Omega$
Inputs	Programmable functional inputs for external emissivity adjustment, ambient temperature compensation, trigger (reset of hold functions)
Cable length	3 m (standard), 8 m, 15 m
Power Supply	8–36 V DC
Current draw	Max. 160 mA
Laser 635 nm	1 mW, ON/OFF via electronic box or software

#### Measurement specifications

Temperature range (scalable via programming keys or software)	$-50 \dots 975\text{ }^{\circ}\text{C}$
Spectral range	8–14 $\mu\text{m}$
Optical resolution (90 % energy)	75:1 CTlaser 50:1 CTlaser F
Selectable focus (CTlaser) <sup>1)</sup>	CF1: 0.9 mm @ 70 mm CF2: 1.9 mm @ 150 mm CF3: 2.75 mm @ 200 mm CF4: 5.9 mm @ 450 mm SF: 16 mm @ 1200 mm
System accuracy <sup>2)</sup> (at ambient temp. $23 \pm 5\text{ }^{\circ}\text{C}$ )	$\pm 1\%$ or $\pm 1\text{ }^{\circ}\text{C}^{3),4)}$ (CTlaser) $\pm 1.5\%$ or $\pm 1.5\text{ }^{\circ}\text{C}^{3),4)}$ (CTlaser F)
Repeatability (at ambient temp. $23 \pm 5\text{ }^{\circ}\text{C}$ )	$\pm 0.5\%$ or $\pm 0.5\text{ }^{\circ}\text{C}^{2),3)}$ (CTlaser) $\pm 1\%$ or $\pm 1\text{ }^{\circ}\text{C}^{2),3)}$ (CTlaser F)
Temperature resolution (NETD)	0.1 K / 0.5 K with CTlaser F
Response time <sup>5)</sup> (90 % signal)	9 ms CTlaser F / 120 ms CTlaser
Emissivity/ Gain (adjustable via programming keys or software)	0.100–1.100
Transmissivity/ Gain (adjustable via programming keys or software)	0.100–1.100
Signal processing (parameter adjustable via programming keys or software, respectively)	Peak hold, valley hold, average; extended hold function with threshold and hysteresis
Software	optris® Compact Connect

<sup>1)</sup> The functioning of the LCD display may be limited in ambient temperatures below  $0\text{ }^{\circ}\text{C}$

<sup>2)</sup> Different spotsizes for CTlaser F (D:S = 50:1)

<sup>3)</sup> Whichever is greater


<sup>4)</sup> At object temperatures  $>0\text{ }^{\circ}\text{C}$ ,  $\epsilon = 1$

<sup>5)</sup> With dynamic adaption at low signal levels


# optris® CTlaser LT

## Optical specifications


SF optics 75:1

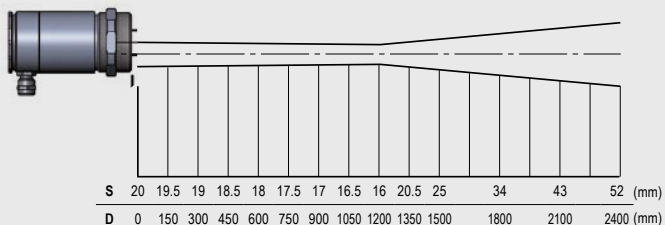


CF1 optics 75:1

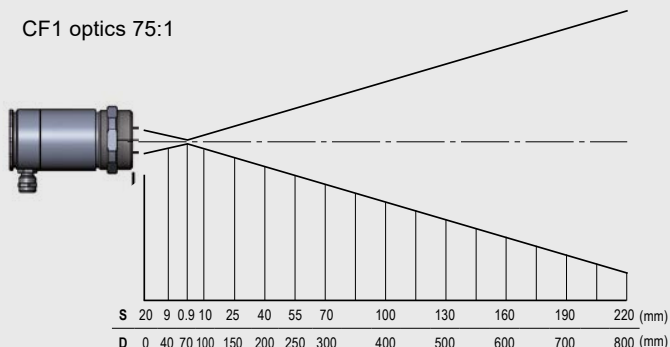


CF2 optics 75:1

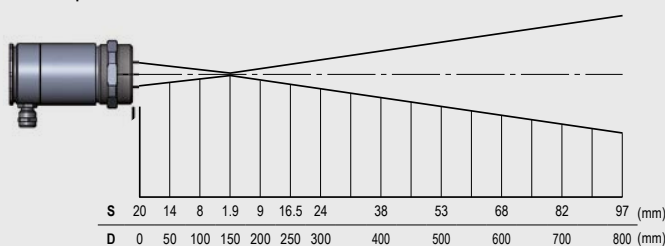

CF3 optics 75:1

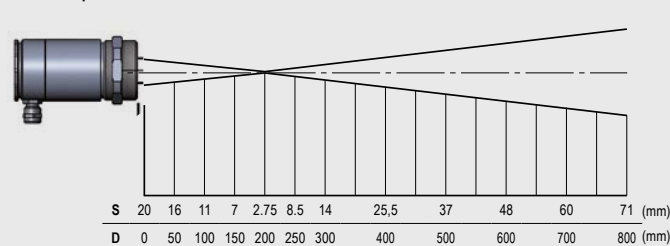


CF4 optics 75:1

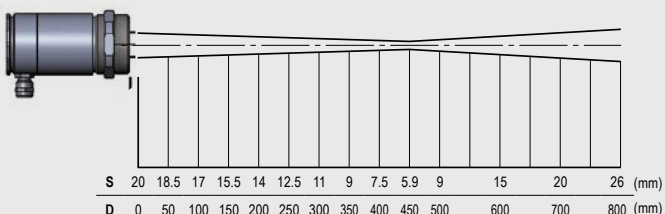


## Dimensions

Sensing head

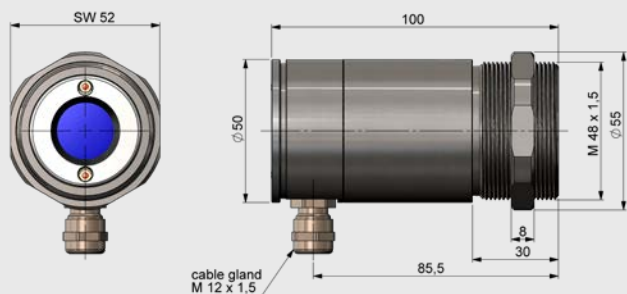

Electronics

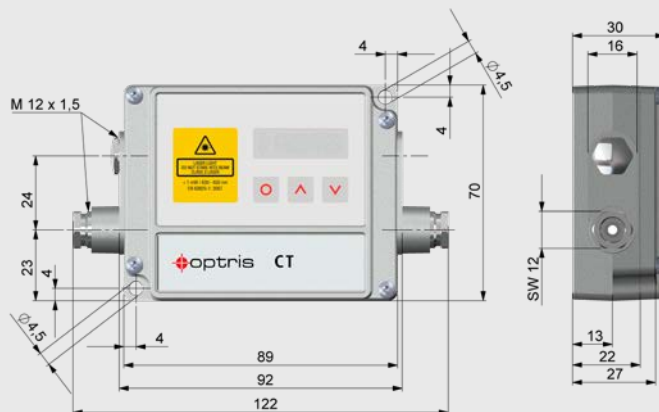



# SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

# [www.scatts.co.uk](http://www.scatts.co.uk)