



# Xi 400

Spot finder IR camera

when temperature matters

# optris Xi 400



## TECHNICAL DATA

### Compact spot finder IR camera



### Features:

- Industrial imager with 382 x 288 pixels for exact temperature measurement of -20 °C ... 900 °C
- Small sized rugged camera with motorized focus
- Superb distance-to-spot-size ratio up to 390:1 with sighting capabilities
- 80 Hz frame rate for monitoring of fast thermal processes
- Extensive ready-to-use package for an attractive price – including versatile image processing software with line-scan feature and connection cables

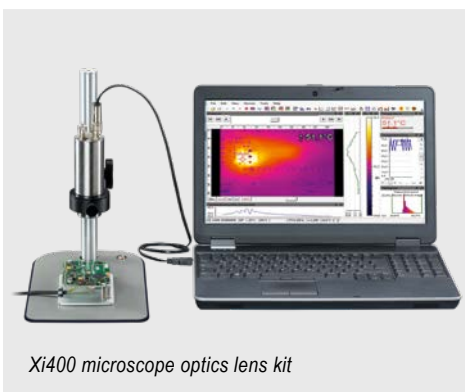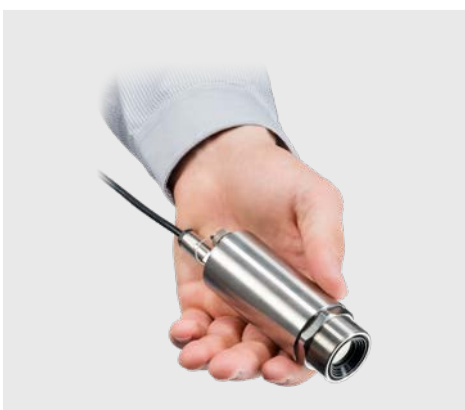

Xi400 microscope optics lens kit

### Technical Specifications

Optical resolution	382 x 288 pixels
Detector	FPA, uncooled (17 µm pitch)
Spectral range	8 – 14 µm
Temperature ranges	-20 ... 100 °C, 0 ... 250 °C, (20) 150 ... 900 °C <sup>1)</sup>
Frame rate	80 Hz / 27 Hz
Optics (FOV)	18° x 14° (f = 20), 29° x 22° (f = 12.7), 53° x 38° (f = 7.7), 80° x 54° (f = 5.7)
Microscope lens (FOV)	18° x 14° (f = 20), smallest measuring spot (MFOV): 240 µm
Focus	Manual motor focus
Optical resolution (D:S)	390:1 (18° optics)
Thermal sensitivity (NETD)	80 mK
Accuracy	±2 °C or ±2 %, whichever is greater
PC interface	USB 2.0 / optional USB to GigE (PoE) conversion
Process interface (PIF), standard	0–10 V input, digital input (max. 24 V), 0–10 V output
Process interface (PIF), industrial	2 x 0–10 V inputs, digital input (max. 24 V), 3x 0/4-20 mA outputs, 3 x relay (0–30 V / 400 mA), fail-safe relay
Cable length (USB)	1 m (standard), 3 m, 5 m, 10 m, 20 m
Ambient temperature	0 °C ... 50 °C
Enclosure (size / rating)	Ø 36 mm x 100 mm (M30x1 thread) / IP 67 (NEMA 4)
Weight (without mounting bracket)	216 - 220 g, depending on lens
Shock <sup>2)</sup> / Vibration <sup>2)</sup>	IEC 60068-2-27 (25G and 50G) / IEC 60068-2-6 (sinus shaped), IEC 60068-2-64 (broadband noise)
Power supply	USB
Scope of supply	<ul style="list-style-type: none"> <li>• Process imager Xi</li> <li>• USB cable (1 m)</li> <li>• Standard PIF cable (1 m) incl. terminal block</li> <li>• Mounting bracket with tripod thread, mounting nut</li> <li>• Software package optris PIX Connect</li> </ul>

<sup>1)</sup> Accuracy statement effective from 150 °C

<sup>2)</sup> For more details see operator's manual



# SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

# [www.scatts.co.uk](http://www.scatts.co.uk)