


PE/N-support (01489)

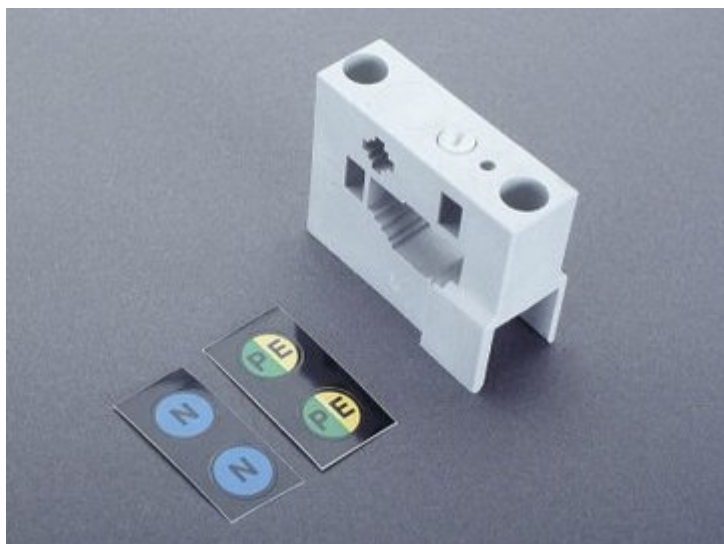

The picture may show a similar product.

Description

Part No.: 01489

PE/N-support

1-pole, attachable to 01500 or separate mounting
for busbars 12, 15, 20, 25, 30 x 5, 10

particular article

System

60Classic

Product group 06

Subgroup 03

pack size 10

EAN 4021267014896

catalog page 2006 : 2.1

eCl@ss 6.1 27400607
eCl@ss 7.1 27400607
ETIM 4.0 EC001166
ETIM 5.0 EC001166

Approvals

Standards

IEC 61439-1:2011
GB/T 7251.1

Approvals

CSA , UL , DNV GL , EAC



type number: 489
EAC Type: SB

UL file: E123577, UL category (for USA): NMTR2 <http://www.ul.com>
UL file: E123577, UL category (for Canada): NMTR8 <http://www.ul.com>
CSA file: 110285, CSA class: 3211-37 <http://directories.csa-international.org>
CCC approval: no certification required

Technical data

Details IEC

Standards

IEC 61439-1:2011
GB/T 7251.1

Electrical data IEC

rated voltage (IEC) AC: 690 V

rated isolation voltage U_i AC: 1000 V

rated surge voltage U_{imp} : 6 kV

power dissipation of the article:

The power dissipation at a typical load of 80 % of the rated current results to 0 W.

(The power dissipation for operation with rated current would be 0 W.)

Supplementary data IEC

The following values have been verified with tests under certain conditions. Please ask Wöhner for this conditions before designing your panel.

max. permitted voltage (IEC) AC: 1000 V

max. permitted voltage (IEC) DC: 1500 V

Details UL

Standards

UL 508

Electrical data UL

rated voltage (UL) AC: 600 V

Mechanical data

W x H x D: 26 x 63 x 51

weight: 5.9 kg/100

poles: 1-pole

for busbars: 12, 15, 20, 25, 30 x 5, 10

Material properties


Main body: temperature stability 125°C,
self-extinguishing in acc. to UL 94,
creepage resistance CTI 600,
halogen-free

Plastic screw:

Reference

Can be mounted individually or together with a 3-pole busbar support
can also be used as a centre support.

Accessories



78442

label

PE green-yellow

diameter 15 mm




78443

label

N blue

diameter 15 mm



78447

label

PE/N green-yellow / blue

diameter 15 mm



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk