

SLIMLINE LAMP WITH ON/OFF SWITCH

SL 025



Photo: Slimline lamp with on/off switch, with integrated electric socket (Germany), Art. No. 02520.0-00


- > Slim casing
- > Electronic ballast
- > Lamp without/with electrical socket (choice of sockets)
- > Magnet fixing (option)
- > Energy saving lamp
- > On/Off switch

The flat slimline lamp SL 025 is suitable for all types of panels and enclosures, especially where space is at a premium. The lamp can be mounted on its narrow or broad surface using screws. It is also available with a magnet which allows it to be fitted quickly in any position in a steel enclosure. Both versions are available with an integrated electrical socket enabling the use of additional appliances.



TECHNICAL DATA

Power consumption	11 W
Luminosity	900 Lm (equals 75 W light bulb)
Lamp type	energy saving lamp, 2G7 socket
Service life	10,000 h
Switch	on/off light switch
Connection	terminal 2.5 mm ² with cable clamp, torque 0.8 Nm max.
Mounting	screw fixing, M5, 300 mm centers magnet fixing (optional)
Casing	plastic according to UL94 V-0, light grey
Dimensions	345 x 91 x 40 mm
Fitting position	narrow surface/broad surface
Operating/Storage temperature	-20 to +50 °C (-4 to +122 °F) / -45 to +70 °C (-49 to +158 °F)
Operating/Storage humidity	max. 90 % RH (non-condensing)
Protection type	IP20

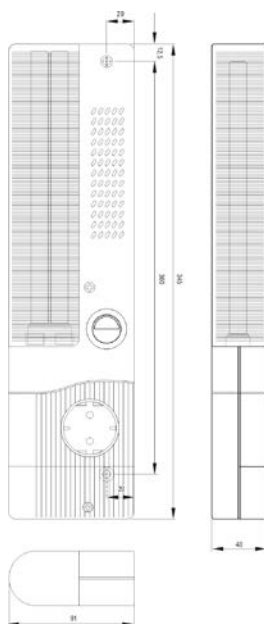

Art. No.	Model	Operating voltage	Socket	Nominal current	Weight (approx.)	Protection class	Approvals		
02520.0-00	without magnet	AC 230 V, 50/60 Hz	Germany/Russia (1)	16.0 A	0.4 kg	I (earthed)	VDE	-	EAC
02520.1-01	with magnet	AC 230 V, 50/60 Hz	Germany/Russia (1)	16.0 A	0.5 kg	I (earthed)	VDE	-	EAC
02521.0-00	without magnet	AC 230 V, 50/60 Hz	F/PL/CZ/SK (2)	16.0 A	0.4 kg	I (earthed)	VDE	-	EAC
02521.1-04	with magnet	AC 230 V, 50/60 Hz	F/PL/CZ/SK (2)	16.0 A	0.5 kg	I (earthed)	VDE	-	EAC
02522.0-00	without magnet	AC 230 V, 50/60 Hz	Switzerland (3)	10.0 A	0.4 kg	I (earthed)	VDE	-	EAC
02522.1-01	with magnet	AC 230 V, 50/60 Hz	Switzerland (3)	10.0 A	0.5 kg	I (earthed)	VDE	-	EAC
02523.0-00	without magnet	AC 230 V, 50/60 Hz	UK/Ireland (4)	13.0 A	0.4 kg	I (earthed)	VDE	-	EAC
02523.1-05	with magnet	AC 230 V, 50/60 Hz	UK/Ireland (4)	13.0 A	0.5 kg	I (earthed)	VDE	-	EAC
02524.0-01	without magnet	AC 120 V, 50/60 Hz	USA/Canada (5)	15.0 A	0.4 kg	I (earthed)	-	UL File No. E234324	EAC
02524.1-05	with magnet	AC 120 V, 50/60 Hz	USA/Canada (5)	15.0 A	0.5 kg	I (earthed)	-	UL File No. E234324	EAC
02527.0-00	without magnet	AC 230 V, 50/60 Hz	none	-	0.4 kg	II (double insulated)	VDE	UL File No. E234324	EAC
02527.1-14	with magnet	AC 230 V, 50/60 Hz	none	-	0.5 kg	II (double insulated)	VDE	-	EAC
02527.0-10	without magnet	AC 120 V, 50/60 Hz	none	-	0.4 kg	II (double insulated)	-	UL File No. E234324	EAC
02527.1-11	with magnet	AC 120 V, 50/60 Hz	none	-	0.5 kg	II (double insulated)	-	UL File No. E234324	EAC
02525.0-00	without magnet	DC 24 - 48 V	none	-	0.4 kg	II (double insulated)	VDE	UL File No. E234324	EAC
02525.1-01	with magnet	DC 24 - 48 V	none	-	0.5 kg	II (double insulated)	VDE	UL File No. E234324	EAC

Note: The slimline lamp SL 025 is also available with a 19" front panel.



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk