



Adaptors and Reducers Type: 476

Flameproof Exd & Increased Safety
Exe Certified ATEX

Accessories

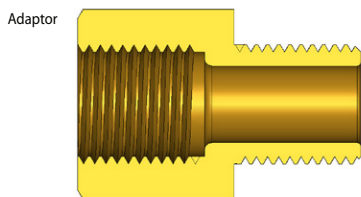

ADAPTOR AND REDUCERS SELECTION TABLE

		Male Thread															
		Metric								NPT*							
		M16	M20	M25	M32	M40	M50	M63	M75	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"
Female Thread	Metric	M16															
		M20															
		M25															
		M32															
		M40															
		M50															
		M63															
		M75															
	NPT*	1/2"															
		3/4"															
		1"															
		1 1/4"															
		1 1/2"															
		2"															
		2 1/2"															
3"																	


All dimensions in millimetres (except * where dimensions are in inches). All metric threads are 1.5mm pitch as standard.

Application

- Provides a means of connection between the equipment and cable glands with dissimilar thread sizes or types.
- See technical section for installation rules and regulations.

Technical Data Group I

- Flameproof & Increased Safety Exde Ⓜ I M2.
- Certificate No's: Sira 06ATEX1240U.
- Suitable for use in Mines.
- Construction and Test Standards: IEC/EN 60079-0, IEC/EN 60079-1 and IEC/EN 60079-7.
- Ingress Protection: IP66.
- Operating Temperature:
 - a) Standard Product - Without O-Ring #tted: - 60°C to +160°C
 - b) Optional Nitrile O-Ring #tted: - 60°C to +80°C
 - c) Optional Silicon O-Ring #tted: - 60°C to +160°C
- Assembly Instruction Sheet: AI 377.
- Alternative certification options available:



Ordering Information

Adaptor Type	Male Thread	Female Thread
M476/1A	M32	M40
Reducer Type	Male Thread	Female Thread
M476/1	M32	3/4"

Features

- Manufactured in Brass (standard), Nickel Plated Brass, 316 Stainless Steel or (Aluminium) - none mining only.
- Brass NPT entries are nickel plated as standard.
- Available for both Group I & Group II applications.

Technical Data Group II

- Flameproof & Increased Safety Exde IIC Ⓜ II 2 GD IP66.
- Certificate No's: Sira 06ATEX1240U.
- Suitable for use in Zone 1, Zone 2, Zone 21, Zone 22 and in Gas Groups IIA, IIB and IIC.
- Construction and Test Standards: IEC/EN 60079-0, IEC/EN 60079-1 and IEC/EN 60079-7.
- Ingress Protection: IP66.
- Operating Temperature:
 - a) Standard Product - Without O-Ring #tted: - 60°C to +160°C
 - b) Optional Nitrile O-Ring #tted: - 60°C to +80°C
 - c) Optional Silicon O-Ring #tted: - 60°C to +160°C
- Assembly Instruction Sheet: AI 377.

Ordering Information

Adaptor Type	Male Thread	Female Thread
476/1A	M32	M40
Reducer Type	Male Thread	Female Thread
476/1	M32	3/4"



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk