


Domed Head Stopping Plug & Breather Drain

Flameproof Exdb / Increased Safety Exeb
Dual Certified ATEX / IECEx

Flameproof Exdb
Dual Certified ATEX / IECEx

487 Domed Head Stopping Plug

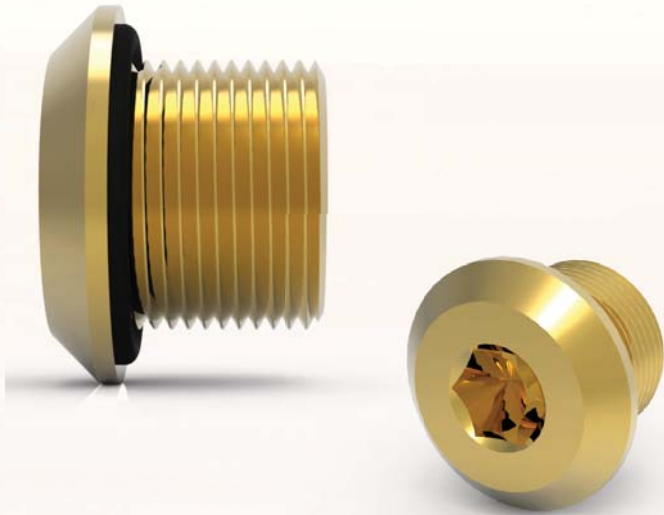

Certification Details

- Increased Safety and Flameproof Exeb I Mb, Exdb I Mb, Exeb IIC Gb, Exdb IIC Gb, Extb IIIC Db, IM2 / II 2GD.
- Certificate No's: Baseefa11ATEX0149X and IECEx BAS 11.0071X.
- Alternative certification options available.
- Operating Temperature Range:
Nitrile 'O' Ring fitted as standard -60°C to +80°C
Silicone Option -60°C to +160°C
- Group I, II and III.

General Information

- Manufactured in Brass, Nickel Plated Brass, Steel, Nickel Plated Steel and Stainless Steel. (Aluminium for Group II use only).
- M16 to M130 as standard.
- Other parallel thread options available on request, including BSPP, PG, NPSM and ET. NPT available as 387 Exe Plug.
- Metric entry threads are 1.5mm pitch as standard.
- Suitable for use in Zone 1, Zone 2, Zone 21, Zone 22 and mining applications.
- Construction and Test Standards: IEC/EN 60079-0, IEC/EN 60079-1, IEC/EN 60079-7 and IEC/EN 60079-31.
- Ingress Protection: IP66.
- Assembly Instruction Sheet: AI 411.

SELECTION TABLE


Thread Size	Length of Thread (mm)	Overall Dia. (mm)	Allen Key (mm)
M16	15	24.0	6
M20	15	26.5	10
M25	15	34.0	10
M32	15	45.0	10
M40	15	51.5	10
M50	15	61.5	10
M63	15	74.5	10
M75	15	86.5	10

Ordering Example:

Note: When ordering metric threads larger than M75, include the thread pitch details.

Product	Thread Size	Material	Finish
487	M32	Brass	Nickel Plated

489 Breather Drain

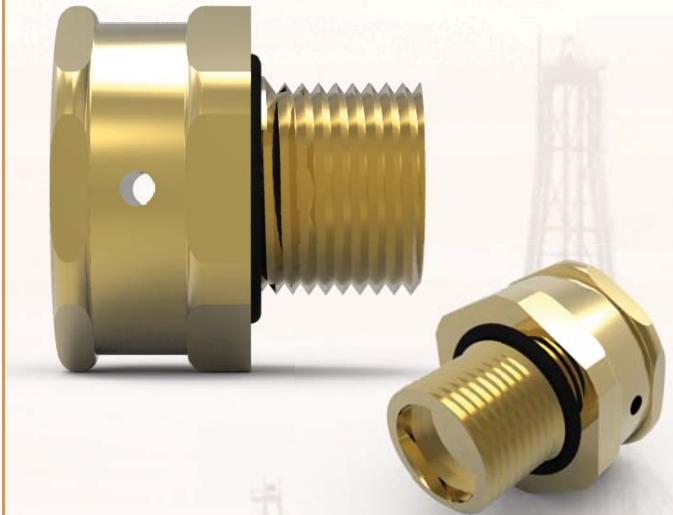

Certification Details

- Flameproof Exdb I Mb, Exdb IIC, Extb IIIC Db IM2 / II 2GD.
- Certificate No's: Baseefa11ATEX0154X and IECEx BAS 11.0076X.
- Alternative certification options available.
- Ambient Temperature Range -60°C to +60°C.
- Temperature Classification: T6
- Group I, II and III.

General Information

- The Breather Drain may only be fitted to the underside of Exd enclosures with internal volumes of 2.5 litres or less..
- Manufactured in Brass, Nickel Plated Brass, 316 Stainless Steel.
- Nitrile O Ring fitted as standard. Silicone option available.
- M20 and M25 with 1.5mm pitch as standard.
- Other thread options available on request, including BSPP, PG, NPT, ET and NPSM.
- Suitable for use in Zone 1, Zone 2, Zone 21, Zone 22 and mining applications.
- Construction and Test Standards: IEC/EN 60079-0, IEC/EN 60079-1 and IEC/EN 60079-31.
- Ingress Protection: IP66.
- Assembly Instruction Sheet: AI 409.

SELECTION TABLE

Thread Size	Length of Thread (mm)	Across Flats (mm)	Across Corners (mm)
M20	15	30	32.5
M25	15	36	39.5

Ordering Example:

Product	Thread Size	Material	Finish
489	M20	Brass	Nickel Plated



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk