

ASi Tuner, ASi Bus Termination



ASi Tuner:

Triplication of the ASi cable length

Strengthen of the robustness of ASi

Supervise the quality of the installation

Tool for the service



ASi-Bus Termination
(Default value of the ASi Tuner)



ASi Tuner

ASi Bus Termination:

Doubling of the ASi cable length
(Default value of the ASi Tuner)



Article no.: BWU1843: ASi Diagnostic Tuner (with ASi Slave address)

Article no.: BWU1648: ASi Tuner (without ASi Slave address)

Article no.: BWU1644: ASi Bus Termination (Default value of the ASi Tuner)

The primary task of the ASi Tuner consists in the length adjustment in ASi circuits without repeater.

The ASi Diagnostic Tuner is suitable for the employment as diagnose unit, which announces the bus function of the control online. Unlike to the ASi Tuner the ASi Diagnostic Tuner is able to read in the traffic light announcements for each individual slave and to refer to the superordinate control system.

The result can be intergrated into an application program. It signals whether an optimization succeeded. Gradual changing of the quality of the ASi circuit can be recognized and repaired so on time.

The ASi Diagnostic Tuner can be switched off over a switch completely or set on a default value.


Article No.	BWU1648/BWU1843	BWU1644
Connection	ASi flat cable/ASi round cable	
Operating voltage	30 V (18 ... 31.6 V)	
Operating current	60 mA	10 mA
LEDs	5	2
LED green	LED (ASi Power) on: U ASi > 26 V LED (ASi Power) flashing: 18,5 V < U ASi < 26 V	U ASi > 26 V
LED red	Error (ASi Analyser)	-
LED yellow	Warning (ASi Analyser)	U ASi > 18,5 V
LED green	Communcation o.k. (ASi Analyser)	-
Ambient operating temperature	0 °C... +55 °C	-30 °C ... +55 °C
Storage temperature	-30 °C... +75 °C	
Pollution degree	2	
Protection category according to EN 60529	IP65	
Tolerable loading referring to humidity	according to EN 61131-2	
Electromagnetic sust.	according to slave spezifikation	
EMC	EN 61000-6-2, EN 61000-6-3	
Dimensions (B / H / D in mm)	90 / 80 / 43	19 / 46

Slave Profile (BWU1843)

I/O Code: 0x7
ID Code: 0xA
ID1 Code: 0x0
ID2 Code: 0x5
VENDOR ID: 0x0002
PRODUCT ID: 0x0002
AB-Slave (up to 62 Slaves)

Bit Allocation

In 0, In 1 binary bits, freely usable
In 2, In 3 serial communication
Out 0, Out 1 serial communication
Out 2 binary bits, freely usable

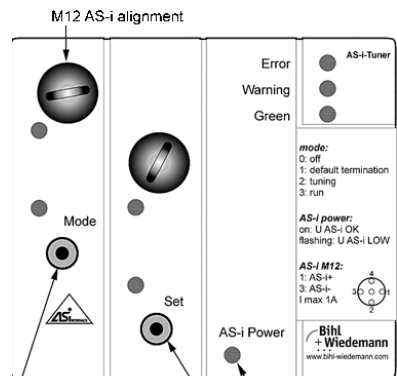


Rotary switch:
BWU1843, BWU1648, BWU1715 (without slave function)
0: off
1: default termination
2: tuning
3: run
only BWU1843 (slave function)
4: off
5: default termination
6: tuning
7: run


Button LED status display:
on: U AS-i OK
flashing: U AS-i LOW

ASi Tuner, ASi Bus Termination

The passive bus termination permits a circuit extension up to approximately 200 m

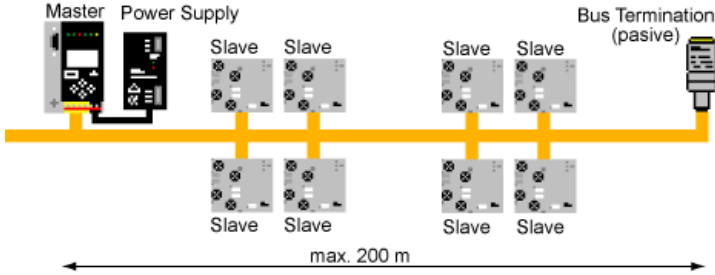

The Bihl+Wiedemann tuner permit a stable communication with net lengths to approximately 300 m *without* the employment of a Repeater and without a second power supply unit.

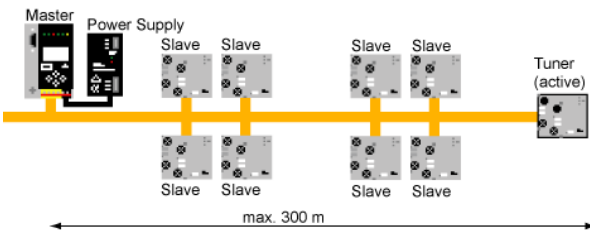

Combi Slave Profile

The ASi Diagnostic Tuner operates after the new "combi slave profile" S-7.A.5, in which digital and serial data will be parallel transferred.

2I/1O data for the basic function of the tuner are transmitted thereby as usual, and are usable with each master. The serial data – here the analog values of the tension and the traffic light values of the individual slaves – are transmitted by the piece with the remaining bits, built up in the master again and sent from here than simple complete telegram to the control. The user finds the up-to-date measured ASi tension and the minimum ASi tension as 16 bit analog value in the field of the input data (similar to the analog value transmission).

So that data transmission rates of approx. 50 Baud are attainable in the ASi A/B operation. Because of the ID code "A" is the Diagnostic Tuner a slave with an extended address range and takes in the A/B operation one of 62 addresses, in the standard mode as A-slave one of 31.

ASi 3.0 Specification

Since the Diagnostic Tuner uses the extended functions as slave, he must be used together with a master after the AS i 3.0 specification. The primary tuner functions is available however also with a ASi Master according to the specification 2.0 or 2.1.

Description of the Bit Allocation

In0, In1

The LEDs indicate the result of the optimization:

Bit	LED	Description
11	red	serious disturbances
10	yellow	more frequent replications, which should be clarified depending upon application
01	green	almost repetition-free communication
00	---	none result available („Tuning-Phase“, or the push-button even pressed)

Out2

A change of 0 to 1 has the same effect as a depressing the key. However no training procedure is released. It can be released only by means of parameters.

Parameter

The parameter bits release (independently of the position of the rotary switch) a training procedure. Only the parameter 5, then the parameter 2 within 5 seconds causes the start of a training procedure.

Analog Channel 0

Tension	as 16 bit value of 0 ... 32 767 in mV
Resolution	10 bit

Analog Channel 1

Tension	as 16 bit value of 0 ... 32 767 in mV
Resolution	10 bit

Vendor Specific Object 1

This object contains a pair of bits, which shows the condition of the slaves in this address for all 62 possible slaves:

Bit	LED
11	red
10	yellow
01	green
00	no slave

Byte	2 ⁷	2 ⁶	2 ⁵	2 ⁴	2 ³	2 ²	2 ¹	2 ⁰
1	3/3A	3/3A	2/2A	2/2A	1/1A	1/1A	---	---
2	7/7A	7/7A	6/6A	6/6A	5/5A	5/5A	4/4A	4/4A
...	...							
16	31B	31B	30B	30B	29B	29B	28B	28B

Accessories:

- ASi Analyser (art. no. BW1415)
- Passive Distributor ASi/AUX to 1 x M12 socket, 5 poles, depth 28 mm, IP67 (art. no. BW3803)



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk