

# ASi Substructure Module



## ASi Substructure Module

### Mounting on DIN rail and rear panel

#### for connection of ASi flat cables:


- quick mounting technology for ASi flat cable
- 2 ASi flat cables (BW1180)
- 2 ASi flat cables with addressing jack (BW1438)
- 1 ASi flat cable,  
1 flat cable for external power supply (BW1181)
- 1 ASi flat cable,  
1 flat cable for external power supply with addressing jack (BW1439)

#### for connection of ASi round cables:

- screw terminal
- 2 ASi round cables (BW1182)
- 1 ASi round cable,  
1 round cable for external power supply (BW1183)

### Lid for standard ASi substructure modules (BW1946)

### ASi ribbon cable seal for PG11 fittings (BW1945)

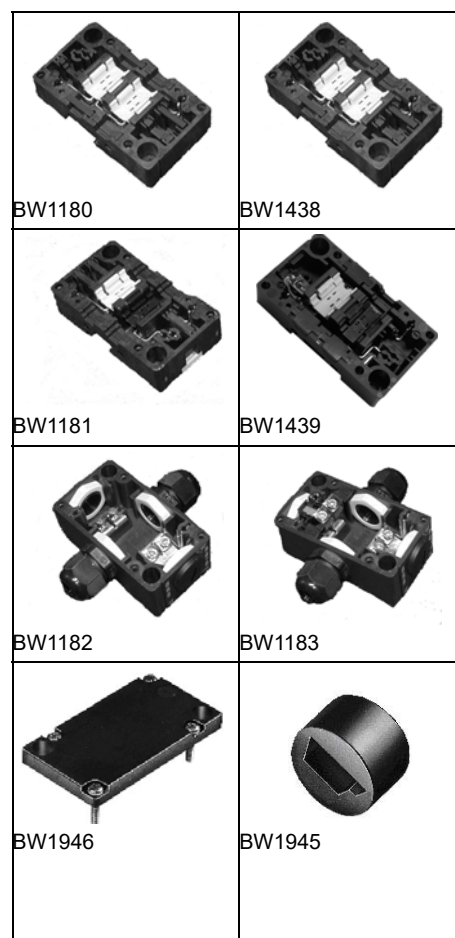

**Article no. BW1180 for connection of 2 ASi flat cables**

**Article no. BW1438 for connection of 2 ASi flat cables with addressing socket**

**Article no. BW1439 for connection of 1 ASi flat cable, 1 flat cable for external auxiliary power with addressing jack**

**Article no. BW1181 for connection of 1 ASi flat cable, 1 flat cable for external power supply**

**Article no. BW1182 for connection of 2 ASi round cables**

**Article no. BW1183 for connection of 1 ASi round cable, 1 round cable for external power supply**

**Article no. BW1946 lid for standard ASi substructure modules**

**Article no. BW1945 ribbon seal for PG11 fittings**

ASi substructure modules are some necessary accessories for ASi modules of the product family IP65 M12- and IP65 PG-modules. They are available in versions for connection of ASi flat and round cables.

With the use of the lid for standard ASi modules further passive branches can be built up.

ASi ribbon cable seal is used for packing of PG11 fittings for ASi flat cable.

Article no.	BW1180	BW1438	BW1181	BW1439	BW1182	BW1183	BW1945
Cable	2 ASi flat cables		1 ASi flat cable		2 ASi round cables		–
Gauge	–		–		< 2,5 mm <sup>2</sup>		–
Connection	contact pins in the unit				terminals up to 2,5 mm <sup>2</sup>		–
Contact rating	< 2 A				< 4 A		–
Operating voltage	ASi		ASi/U AUX		ASi	ASi/U AUX	–
Ambient operating temperature	-25 ... 75 °C						
Storage temperature	-25 ... 85 °C						
Protection category	IP65						
Dimensions (L / W / H in mm)	80 / 45 / 20				80 / 45 / 34		–
Packaging unit	1 piece						50 pieces

**ASi Substructure Module**

<b>Article no.</b>	<b>BW1946</b>
Ambient operating temperature	-25 ... 75 °C
Storage temperature	-25 ... 85 °C
Protection category	IP65
Dimensions (L / W / H in mm)	80 / 45 / 13
Packaging unit	1 piece



# SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

# [www.scatts.co.uk](http://www.scatts.co.uk)