

# Digital Modules ASi in IP20, 22,5 mm






Cost efficient solution in IP20




(Figure similar)



Figure	Type	Housing	Primary application <sup>(1)</sup>	Inputs digital	Outputs digital	Input voltage (sensor supply) <sup>(2)</sup>	Output voltage (actuator supply) <sup>(3)</sup>	ASi connection <sup>(4)</sup>	ASi address <sup>(5)</sup>	Article No.
	IP20, 22,5 mm x 50 mm, 4 x COMBICON	4 x COMBICON	decentralized control cabinet	4	4 x electronic	out of ASi	out of ASi	clamps	1 AB slave	<b>BWU2783</b>
	IP20, 22,5 mm x 50 mm, 4 x COMBICON	4 x COMBICON	decentralized control cabinet	4	4 x electronic	out of ASi	out of ASi	clamps	1 single slave	<b>BWU3272</b>
	IP20, 22,5 mm x 50 mm, 4 x COMBICON	3 x COMBICON	decentralized control cabinet	4	–	out of ASi	–	clamps	1 AB slave (S-0.A.7.0)	<b>BWU3747</b>
	IP20, 22,5 mm x 92 mm 4 x COMBICON	4 x COMBICON	control cabinet	4	4 x electronic	out of AUX	out of AUX	clamps	1 AB Slave	<b>BWU3559</b>
	IP20, 22,5 mm x 92 mm 4 x COMBICON	4 x COMBICON	control cabinet	4	4 x electronic	out of AUX	out of AUX	clamps	1 AB Slave	<b>BWU3842</b>
	IP20, 22,5 mm x 92 mm 4 x COMBICON	4 x COMBICON	control cabinet	4	3 x electronic	out of AUX	out of AUX	clamps	1 AB Slave	<b>BWU3733</b>
	IP20, 22,5 mm x 114 mm, 4 x COMBICON	3 x COMBICON	control cabinet	4	–	out of AUX	–	clamps	1 AB slave	<b>BWU2723</b>
	IP20, 22,5 mm x 114 mm, 4 x COMBICON	4 x COMBICON	control cabinet	4	4 x electronic	out of AUX	out of AUX	clamps	1 AB slave	<b>BWU1938</b>
	IP20, 22,5 mm x 114 mm, 4 x COMBICON	4 x COMBICON	control cabinet	4	4 x electronic	out of AUX	out of AUX	clamps	1 single slave	<b>BWU2759</b>
	IP20, 22,5 mm x 114 mm, 4 x COMBICON	4 x COMBICON	control cabinet	8	–	out of AUX	–	clamps	2 AB slaves	<b>BWU2721</b>
	IP20, 22,5 mm x 114 mm, 4 x COMBICON	4 x COMBICON	decentralized control cabinet	4	–	out of ASi	–	clamps	1 AB slave	<b>BWU3265</b>
	IP20, 22,5 mm x 114 mm, 4 x COMBICON	4 x COMBICON	decentralized control cabinet	4	–	out of AUX	–	clamps	1 AB slave	<b>BWU3266</b>

# Digital Modules ASi in IP20, 22,5 mm

Figure	Type	Housing	Primary application <sup>(1)</sup>	Inputs digital	Outputs digital	Input voltage (sensor supply) <sup>(2)</sup>	Output voltage (actuator supply) <sup>(3)</sup>	ASi connection <sup>(4)</sup>	ASi address <sup>(5)</sup>	Article No.
	IP20, 22,5 mm x 114 mm, 6 x COMBICON	6 x COMBICON	control cabinet	4	3 x relay	out of ASi	–	clamps	1 AB slave	<b>BWU3878</b>
	IP20, 22,5 mm x 114 mm, 6 x COMBICON	6 x COMBICON	control cabinet	4	4 x relay	out of ASi	–	clamps	1 single slave	<b>BWU3435</b>
	IP20, 22,5 mm x 114 mm, 6 x COMBICON	6 x COMBICON	control cabinet	4	4 x relay	out of ASi	–	clamps	1 single slave (S-7.0.F.E)	<b>BWU3658</b>
	IP20, 22,5 mm x 114 mm, 6 x COMBICON	6 x COMBICON	control cabinet	4	4 x relay	out of ASi	–	clamps	1 AB slave	<b>BWU3549</b>
	IP20, 22,5 mm x 114 mm, 6 x COMBICON	6 x COMBICON	control cabinet	8	8 x electronic	out of ASi	out of AUX	clamps	2 AB slaves	<b>BWU3364</b>
	IP20, 22,5 mm x 114 mm, 6 x COMBICON	6 x COMBICON	control cabinet	8	8 x electronic	out of AUX	out of AUX	clamps	2 AB slaves	<b>BWU2490</b>
	IP20, 22,5 mm x 114 mm, 6 x COMBICON	6 x COMBICON	control cabinet	8	8 x electronic	out of AUX	out of AUX	clamps	2 single slaves	<b>BWU2800</b>
	IP20, 22,5 mm x 114 mm, 6 x COMBICON	6 x COMBICON	control cabinet	8 (NPN)	8 x electronic (NPN)	out of AUX	out of AUX	clamps	2 AB slaves	<b>BWU3359</b>
	IP20, 22,5 mm x 114 mm, 6 x COMBICON	6 x COMBICON	decentralized control cabinet	4	4 x electronic	out of ASi	out of AUX	clamps	1 AB slave	<b>BWU3267</b>
	IP20, 22,5 mm x 114 mm, 6 x COMBICON	6 x COMBICON	decentralized control cabinet	4	4 x electronic	out of AUX	out of AUX	clamps	1 AB slave	<b>BWU3268</b>
	IP20, 22,5 mm x 114 mm, 6 x COMBICON	6 x COMBICON	decentralized control cabinet	4	4 x electronic	out of ASi	out of AUX	clamps	1 single slave	<b>BWU3754</b>

**(1) Primary Application**

**Control cabinet:** Cost-optimized modules whereby the supply voltage for the sensors and actuators is connected via additional patch terminals. Optimal application in the main control cabinet.

**Decentralized control cabinet:** Ideal for use in decentralized control cabinets. 3-wire sensors or actuators can be connected directly to terminals in the module without additional patch terminals or the module has an extremely flat design.

**(2) Input voltage (sensor supply):** inputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, inputs shall not be connected to earth or to external potential.

**(3) Output voltage (actuator supply):** outputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, outputs shall not be connected to earth or to external potential

**(4) ASi connection:** the connection to ASi as well to AUX (auxiliary 24 V power) is made via yellow resp. black ASi profile cable with piercing technology or via M12 socket (in IP20 via clamps).

**(5) ASi address:** 1 AB slave (max. 62 AB slaves/ASi network), 2 AB slaves (max. 31 modules with 2 AB slaves), single slaves (max. 31 single slaves/ASi network), mixed use allowed.

For modules with two slaves the second slave is turned off as long as the first slave is addressed to address "0".

Upon request, slaves are available with specific ASi slave profiles.

# Digital Modules ASi in IP20, 22,5 mm




Article no.	BWU3272		BWU2783	BWU3747
<b>General data</b>				
Device type	input / output			input
<b>Connection</b>				
ASi / AUX connection	COMBICON plug			
Periphery connection	COMBICON plug			
Primary application	decentralized control cabinet			
Length of connector cable	I/O: max. 15 m <sup>(1)</sup>			
<b>ASi</b>				
Profile	S-7.0.E, ID1=F (default)	S-7.A.7, ID1=7 (fixed)	S-0.A.0, ID1=7 (default)	
Address	1 single slave	1 AB slave		
Required Master profile	≥M0	≥M4	≥M3	
Since ASi specification	2	3.0	2.1	
Operating voltage	30 V (18 ... 31.6 V)			
Max. current consumption	165 mA			
Max. current consumption without sensor/ actuator supply	45 mA			
<b>Input</b>				
Number	4			
Power supply	out of ASi			
Sensor supply	short-circuit and overload protected according to EN 61131-2			
Power supply of attached sensors	up to +40 °C	120 mA, ∑ (In/Out) 120 mA <sup>(2)</sup>		120 mA, ∑ (In) 120 mA <sup>(4)</sup>
	at +55 °C	20 mA, ∑ (In/Out) 20 mA <sup>(2)</sup>		20 mA, ∑ (In) 20 mA <sup>(4)</sup>
Switching threshold	U<5 V (low) U>15 V (high)			
<b>Output</b>				
Number	4 x electronic			–
Power supply	out of ASi			–
Actuator supply	short-circuit and overload protected according to EN 61131			–
Max. output current	up to +40 °C	120 mA per output, ∑ (In/Out) 120 mA <sup>(2)</sup>		–
	at +55 °C	20 mA, ∑ (In/Out) 20 mA <sup>(2)</sup>		–
<b>Display</b>				
LED ASI (green)	an: ASi voltage on, flashing: ASi voltage on, but peripheral fault <sup>(3)</sup> or address 0 off: no ASi Voltage			
LED FLT/FAULT (red)	an: slave address 0 or slave offline flashing: peripheral fault <sup>(3)</sup> off: slave online			
LEDs I1 ... In (yellow)	state of inputs I1 ... I4			
LEDs O1 ... On (yellow)	state of outputs O1 ... O4			–

# Digital Modules ASi in IP20, 22,5 mm




Article no.	BWU3272	BWU2783	BWU3747
<b>Environment</b>			
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 61131 EN 60529		
Operating altitude	max. 2000 m		
Ambient temperature	-25 °C ... +40 °C (up to max. +55 °C) <sup>(2)</sup> no condensation permitted		
Storage temperature	-25 °C ... +85 °C		
Housing	plastic, for DIN rail mounting		
Pollution Degree	2		
Protection category	IP20		
Tolerable loading referring to humidity	according to EN 61131-2		
Voltage of insulation	≥500 V		
Weight	65 g		
Dimensions (W / H / D in mm)	22,5 / 99 / 50,5		

(1) Loop resistance ≤150 Ω

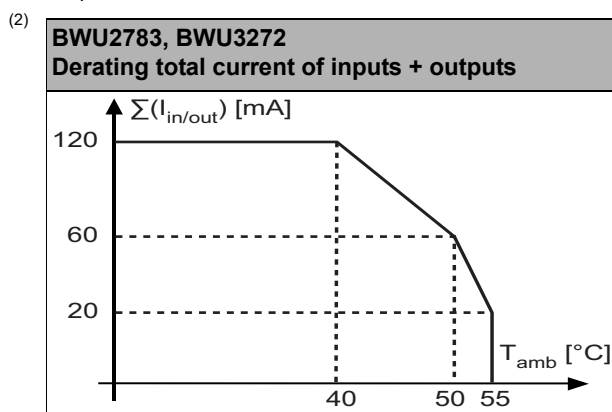

(3) see table „Peripheral fault indication“

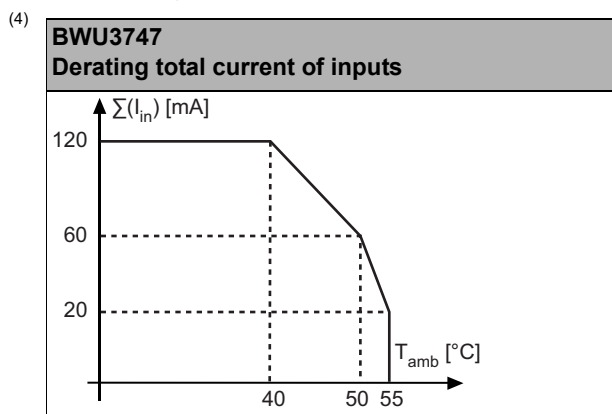

# Digital Modules ASi in IP20, 22,5 mm




Article no.	BWU3265	BWU3266	BWU3268	BWU3267	BWU3754
<b>General data</b>					
Device type	input		input / output		
<b>Connection</b>					
ASi / AUX Connection	COMBICON plug				
Periphery connection	COMBICON plug				
Primary application	decentralized control cabinet				
Length of connector cable	I/O: unlimited <sup>(1)</sup>				
<b>ASi</b>					
Profile	S-7.A.E, ID1=7 (default)		S-7.A.7, ID1=7 (fixed)		S-7.0.E, ID1=F (default)
Address	1 AB slave				1 single slave
Required Master profile	≥M3		≥M4		≥M0
Since ASi specification	2.1		3.0		2
Operating voltage	30 V (18 ... 31.6 V)				
Max. current consumption	165 mA	35 mA		165 mA	
Max. current consumption without sensor/ actuator supply	45 mA	35 mA		45 mA	
<b>AUX</b>					
Voltage	–	24 V (18 ... 30 V)			
Max. current consumption	–	1,2 A	4,2 A	3 A	
<b>Input</b>					
Number	4				
Power supply	out of ASi	out of AUX		out of ASi	
Sensor supply	short-circuit and overload protected according to EN 61131-2				
power supply of attached sensors	up to +40 °C	120 mA <sup>(2)</sup>	1200 mA permanent operation <sup>(5)</sup>		120 mA <sup>(2)</sup>
	at +55 °C	90 mA <sup>(2)</sup>	900 mA permanent operation <sup>(5)</sup>		90 mA <sup>(2)</sup>
	at +70 °C	60 mA <sup>(2)</sup>	600 mA permanent operation <sup>(5)</sup>		60 mA <sup>(2)</sup>
Switching threshold	U < 5 V (low) U > 15 V (high)				
<b>Output</b>					
Number	–		4 x electronic		
Power supply	–		out of AUX		
Actuator supply	short-circuit and overload protected according to EN 61131-2				
Max. output current	up to +50 °C	–		1 A per output, $\sum$ (Out) 3,0 A <sup>(6)</sup>	
	at +55 °C	–		1 A per output, $\sum$ (Out) 2,5 A <sup>(6)</sup>	
	at +70 °C	–		1 A per output, $\sum$ (Out) 1,0 A <sup>(6)</sup>	
<b>Display</b>					
LED ASi (green)	an: ASi voltage on, flashing: ASi voltage on, but peripheral fault <sup>(3)</sup> or address 0 off: no ASi Voltage				
LED FLT/FAULT (red)	an: slave address 0 or slave offline flashing: peripheral fault <sup>(3)</sup> off: slave online				
LEDs I1 ... I4 (yellow)	state of inputs I1 ... I4				
LEDs O1 ... O4 (yellow)	–		state of outputs O1 ... O4		
LED AUX (green)	–		on: 24 V <sub>DC</sub> AUX off: no 24 V <sub>DC</sub> AUX		

# Digital Modules ASi in IP20, 22,5 mm




Article no.	BWU3265	BWU3266	BWU3268	BWU3267	BWU3754
<b>Environment</b>					
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 61131 EN 60529				
Operating altitude	max. 2000 m				
Ambient temperature	-25 °C ... +55 °C (up to max. +70 °C) (2) (4)	-25 °C ... +55 °C (up to max. +70 °C) (4) (5) (6)		-25 °C ... +55 °C (up to max. +70 °C) (2) (4) (6)	
	no condensation permitted				
Storage temperature	-25 °C ... +85 °C (2) (3)				
Housing	plastic, for DIN rail mounting				
Pollution Degree	2				
Protection category	IP20				
Tolerable loading referring to humidity	according to EN 61131-2				
Voltage of insulation	≥500 V				
Weight	120 g				
Dimensions (W / H / D in mm)	22,5 / 99 / 114				

(1) Loop resistance ≤150 Ω

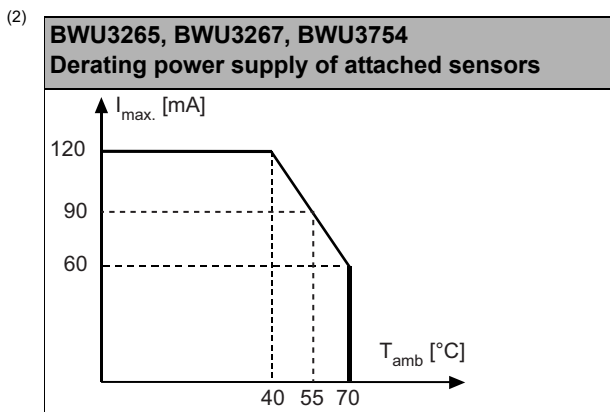


(3) see table „peripheral fault indication“

(4) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada.

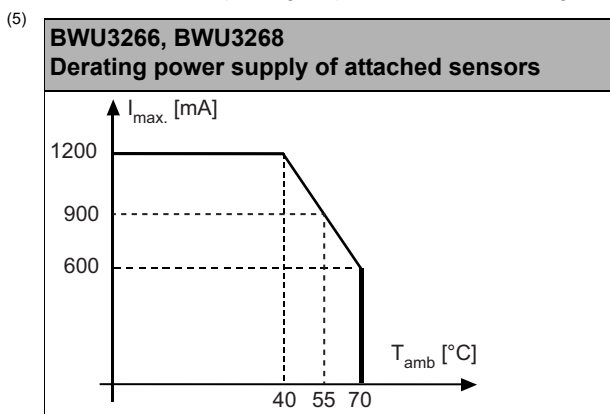

# Digital Modules ASi in IP20, 22,5 mm

(6)

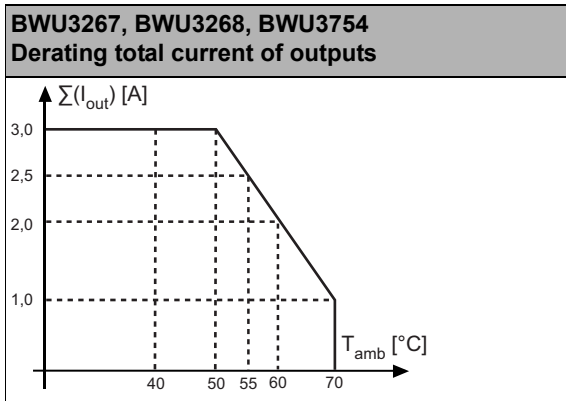

Article no.	BWU2723	BWU3842	BWU1938	BWU3559	BWU3733	BWU2759
<b>General data</b>						
Device type	input		inputs / output			
<b>Connection</b>						
ASi / AUX Connection			COMBICON plug			
Periphery connection			COMBICON plug			
Primary application			control cabinet			
Length of connector cable			I/O: unlimited <sup>(1)</sup>			
<b>ASi</b>						
Profile	S-7.A.E, ID1=7 (default)		S-7.A.7, ID1=7 (fixed)		S-7.A.0, ID1=7 (default)	S-7.0.E, ID1=F (default)
Address			1 AB slave			1 single slave
Required Master profile	≥M3		≥M4		≥M3	≥M0
Since ASi specification	2.1		3.0		2.1	2
Operating voltage			30 V (18 ... 31.6 V)			
Max. current consumption			35 mA			
Max. current consumption without sensor/ actuator supply			35 mA			
<b>AUX</b>						
Voltage			24 V (18 ... 30 V)			
Max. current consumption	1,2 A	8 A	4 A			
<b>Input</b>						
Number			4			
Power supply			out of AUX			
Sensor supply			short-circuit and overload protected according to EN 61131			
power supply of attached sensors	up to +40 °C	1200 mA permanent operation <sup>(2)</sup>	< 500 mA	1200 mA permanent operation <sup>(2)</sup>		
	at +55 °C	900 mA permanent operation <sup>(2)</sup>		900 mA permanent operation <sup>(2)</sup>		
	at +70 °C	600 mA permanent operation <sup>(2)</sup>		600 mA permanent operation <sup>(2)</sup>		
Switching threshold			U < 5 V (low) U > 15 V (high)			


# Digital Modules ASi in IP20, 22,5 mm



Article no.	BWU2723	BWU3842	BWU1938	BWU3559	BWU3733	BWU2759
<b>Output</b>						
Number	–	4 x electronic			3 x electronic	4 x electronic
Power supply	–	out of AUX				
Actuator supply	short-circuit and overload protected according to EN 61131					
Max. output current	up to +50 °C	–	2 A per output, $\Sigma$ (In/Out) 8 A <sup>(5)</sup>	1 A per output, $\Sigma$ (Out) 3,0 A <sup>(6)</sup>		
	at +55 °C		2 A per output, $\Sigma$ (In/Out) 4 A <sup>(5)</sup>	1 A per output, $\Sigma$ (Out) 2,5 A <sup>(6)</sup>		
	at +70 °C		2 A per output, $\Sigma$ (In/Out) 2 A <sup>(5)</sup>	1 A per output, $\Sigma$ (Out) 1,0 A <sup>(6)</sup>		
<b>Display</b>						
LED ASI (green)	an: ASi voltage on, flashing: ASi voltage on, but peripheral fault <sup>(3)</sup> or address 0 off: no ASi Voltage					
LED FLT/FAULT (red)	an: slave address 0 or slave offline flashing: peripheral fault <sup>(3)</sup> off: slave online					
LEDs I1 ... In (yellow)	state of inputs I1 ... I4					
LEDs O1 ... On (yellow)	–	state of outputs O1 ... O4				
LED AUX (green)	on: 24 V <sub>DC</sub> AUX off: no 24 V <sub>DC</sub> AUX					
<b>Environment</b>						
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 61131 EN 60529					
Operating altitude	max. 2000 m					
Ambient temperature	-25 °C ... +55 °C C (up to max. +70 °C) <sup>(2) (4)</sup>	-25 °C ... +55 °C (up to max. +70 °C) <sup>(2) (4) (5) (6)</sup>				
		no condensation permitted				
Storage temperature	-25 °C ... +85 °C					
Housing	plastic, for DIN rail mounting					
Pollution Degree	2					
Protection category	IP20					
Tolerable loading referring to humidity	according to EN 61131-2					
Voltage of insulation	≥500 V					
Weight	120 g					
Dimensions (W / H / D in mm)	22,5 / 99 / 114	22,5 / 99 / 92	22,5 / 99 / 114	22,5 / 99 / 92		22,5 / 99 / 114



(1) Loop resistance ≤150 Ω

# Digital Modules ASi in IP20, 22,5 mm

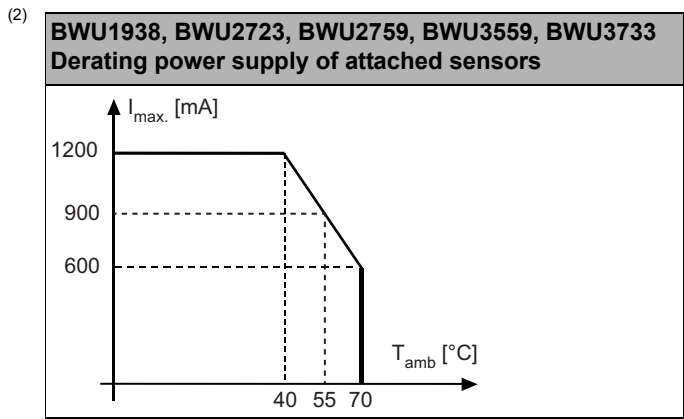

(3) see table „peripheral fault indication“

(4) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada.

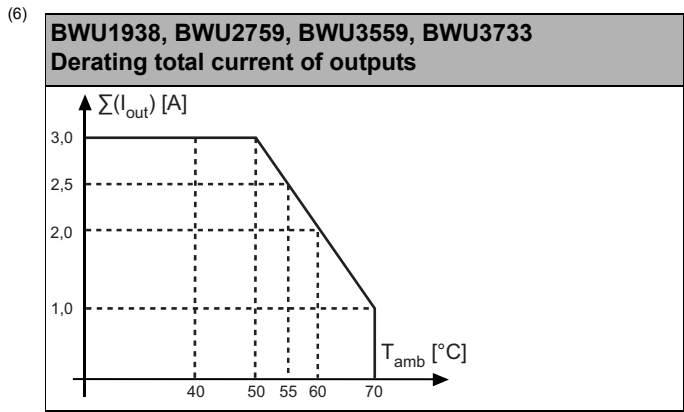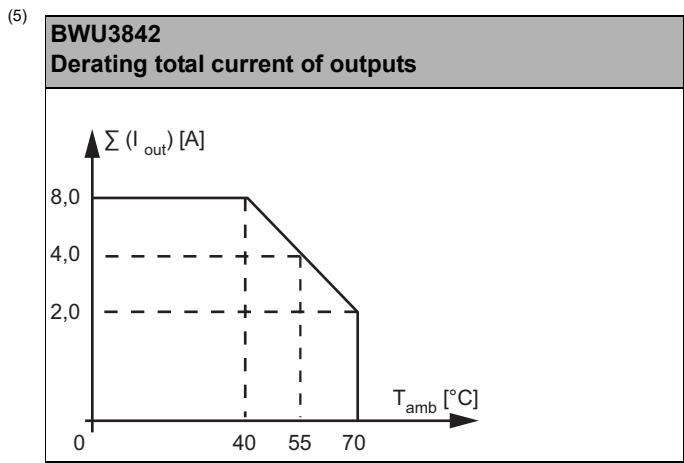

Article no.	BWU3364	BWU2490	BWU2800	BWU2721	BWU3359
<b>General data</b>					
Device type	input / output			input	input / output
<b>Connection</b>					
ASi / AUX connection	COMBICON plug				
Periphery connection	COMBICON plug				
Primary application	control cabinet				
Length of connector cable	I/O: unlimited <sup>(1)</sup>				

# Digital Modules ASi in IP20, 22,5 mm



Article no.	BWU3364	BWU2490	BWU2800	BWU2721	BWU3359
<b>ASi</b>					
Profile	slave 1: S-7.A.7, ID1=7 (fixed), slave 2: S-7.A.7, ID1=6 (default)		slave 1: S-7.0.E, ID1=F (default) slave 2: S-7.0.E, ID1=E (default)	slave 1: S-7.A.E, ID1=7 (default) slave 2: S-7.A.E, ID1=6 (default)	slave 1: S-7.A.7, ID1=7 (fixed), slave 2: S-7.A.7, ID1=6 (default)
Address	2 AB slaves		2 single slaves	2 AB slaves	
Required Master profile	≥M4		≥M0	≥M3	≥M4
Since ASi specification	3.0		2.0	2.1	3.0
Operating voltage	30 V (18 ... 31.6 V)				
Max. current consumption	320 mA	60 mA			
Max. current consumption without sensor/ actuator supply	60 mA	60 mA			
<b>AUX</b>					
Voltage	24 V (18 ... 30 V)				
Max. current consumption	8 A			1,2 A	8 A
<b>Input</b>					
Number	8			8 (NPN)	
Power supply	out of ASi		out of AUX		
Sensor supply	short-circuit and overload protected according to EN 61131				
Power supply of attached sensors	up to +40 °C	260 mA <sup>(2)</sup>	900 mA permanent operation <sup>(5)</sup>		1200 mA permanent operation <sup>(9)</sup>
	at +55 °C	130 mA <sup>(2)</sup>	700 mA permanent operation <sup>(5)</sup>		900 mA permanent operation <sup>(9)</sup>
	at +70 °C	–	600 mA permanent operation <sup>(5)</sup>		600 mA permanent operation <sup>(9)</sup>
Switching threshold	U<5 V (low) U>15 V (high)				ground I+ -U<5 V (low) -U>15 V (high)
<b>Output</b>					
Number	8 x electronic			–	8 x electronic (NPN)
Power supply	out of AUX			–	out of AUX
Actuator supply	short-circuit and overload protected according to EN 61131				
Max. output current	up to +40 °C	1 A per output, $\sum (O1 \dots O4) 3 A +$ $\sum (O5 \dots O8) 3 A$ 3 A <sup>(3)</sup>	1 A per output, $\sum (O1 \dots O4) 3 A +$ $\sum (O5 \dots O8) 3 A$ 3 A <sup>(6)</sup>		0,5 A per output, $\sum (Out) 4 A$ <sup>(10)</sup>
	at +55 °C	1 A per output, $\sum (O1 \dots O4) 2 A +$ $\sum (O5 \dots O8) 2 A$ 2 A <sup>(3)</sup>	–		–
	at +70 °C	–	1 A per output, $\sum (O1 \dots O8) 1 A$ <sup>(6)</sup>		0,5 A per output, $\sum (Out) 0,5 A$ <sup>(10)</sup>
<b>Display</b>					
LED ASI/FLT 1 (red/green)	green: slave online red: slave offline yellow/red flashing: address 0				
LED ASI/FLT 2 (red/green)	green: slave online red: slave offline yellow/red flashing: address 0 red/green flashing: peripheral fault <sup>(4)</sup> red flashing: slave 2 is switched off, because slave 1 is offline				
LEDs I1 ... In (yellow)	state of inputs I1 ... I8				
LEDs O1 ... On (yellow)	state of outputs O1 ... O8			–	state of outputs O1 ... O8
LED AUX (green)	on: 24 V <sub>DC</sub> AUX off: no 24 V <sub>DC</sub> AUX				


# Digital Modules ASi in IP20, 22,5 mm




Article no.	BWU3364	BWU2490	BWU2800	BWU2721	BWU3359
<b>Environment</b>					
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 61131 EN 60529				
Operating altitude	max. 2000 m				
Ambient temperature	30 °C ... +55 °C (2) (3)	-30 °C ... +55 °C (up to max. +70 °C) (5) (6) (7) (8)		-30 °C ... +55 °C (up to max. +70 °C) (7) (9) (10)	
	no condensation permitted				
Storage temperature	-25 °C ... +85 °C				
Housing	plastic, for DIN rail mounting				
Pollution Degree	2				
Protection category	IP20				
Tolerable loading referring to humidity	according to EN 61131-2				
Voltage of insulation	≥500 V				
Weight	120 g				
Dimensions (W / H / D in mm)	22,5 / 99 / 114				

(1) Loop resistance ≤150 Ω

(2)


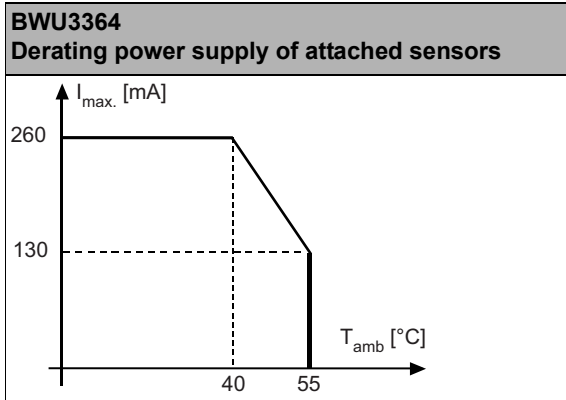


(3)


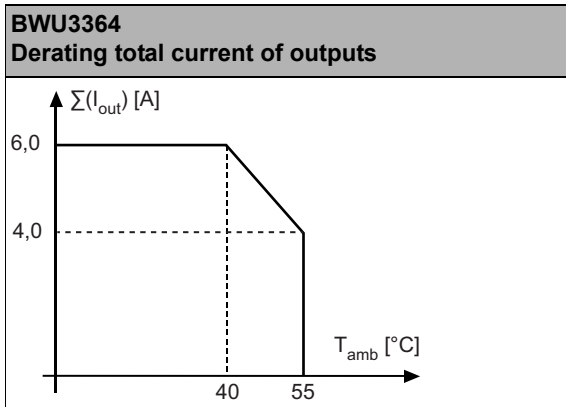


(4) see table „peripheral fault indication“

**Digital Modules ASi in IP20, 22,5 mm**

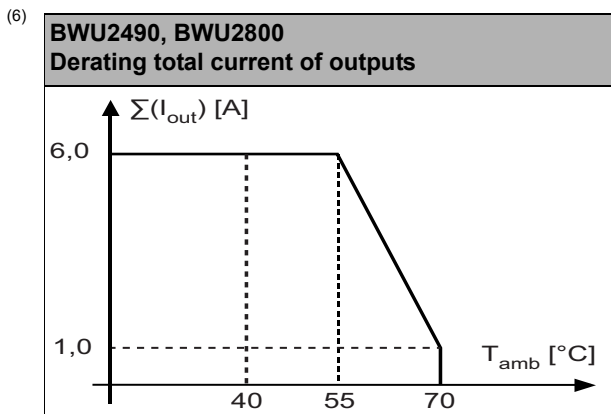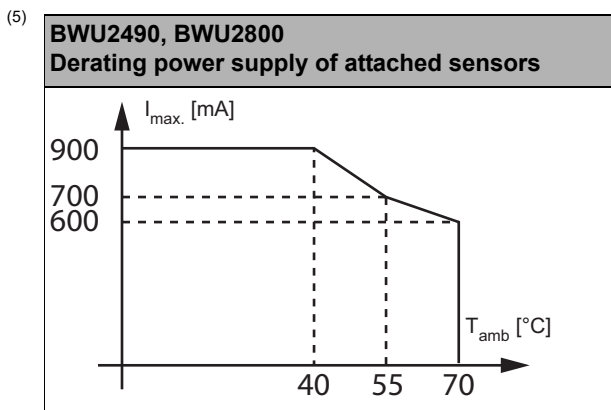

- (7) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada.
- (8) Temperature range up to -30°C from Ident.No. ≥16283 (BWU2490); Ident.No. ≥16299 (BWU2800).

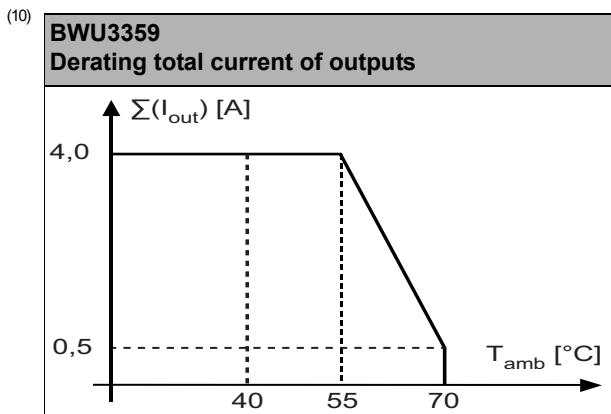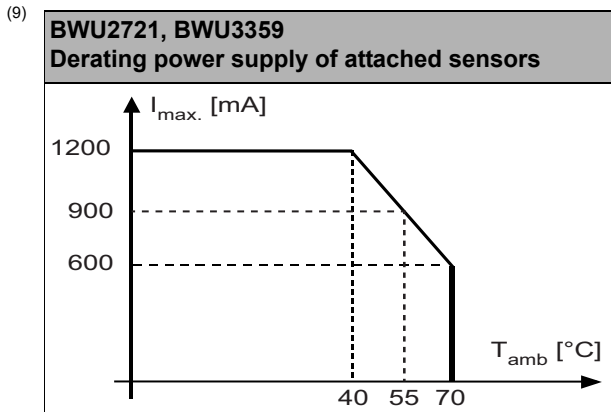

# Digital Modules ASi in IP20, 22,5 mm




Article no.	BWU3878	BWU3435	BWU3658	BWU3549
<b>General data</b>				
Device type	input / output			
<b>Connection</b>				
ASi / AUX Connection	COMBICON plug			
Periphery connection	COMBICON plug			
Primary application	control cabinet			
Length of connector cable	I/O: unlimited <sup>(1)</sup>			
<b>ASi</b>				
Profile	S.7.A.7.0	S-7.F.E, ID1=F (default)	S-7.0.E, ID1=F (default)	S-7.A.7, ID=7(fixed)
Address	1 AB slave	1 single slave		1 AB slave
Required Master profile	≥M0			≥M4
Since ASi specification	2			3
Operating voltage	30 V (26,5 ... 31.6 V)			
Max. current consumption	200 mA			165 mA
Max. current consumption without sensor/ actuator supply	45 mA			
<b>Input</b>				
Number	4			
Power supply	out of ASi			
Sensor supply	short-circuit and overload protected according to EN 61131			
Power supply of attached sensors	up to +40 °C	120 mA <sup>(2)</sup>		120 mA <sup>(5)</sup>
	at +55 °C	90 mA <sup>(2)</sup>		90 mA <sup>(5)</sup>
	at +70 °C	60 mA <sup>(2)</sup>		60 mA <sup>(5)</sup>
Switching threshold	U<5 V (low) U>15 V (high)			
<b>Output</b>				
Number	3 x relay outputs, normally open, 230 VAC/2A/AC-14, 30 VDC/2A/DC-13 Σ (Out) 8 A	4 x relay outputs, normally open, 230 VAC/2A/AC-14, 30 VDC/2A/DC-13 Σ (Out) 8 A		
Relay control	out of ASi			
Max. output current	-			
<b>Display</b>				
LED ASi (green)	an: ASi voltage on, flashing: ASi voltage on, but peripheral fault <sup>(3)</sup> or address 0 off: no ASi Voltage			
LED FLT/FAULT (red)	an: slave address 0 or slave offline flashing: peripheral fault <sup>(3)</sup> off: slave online			
LEDs I1 ... In (yellow)	state of inputs I1 ... I4			
LEDs O1 ... On (yellow)	state of outputs O1 ... O3	state of outputs O1 ... O4		

# Digital Modules ASi in IP20, 22,5 mm





Article no.	BWU3878	BWU3435	BWU3658	BWU3549
<b>Environment</b>				
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 61131 EN 60529			
Operating altitude	max. 2000 m			
Ambient temperature	-25 °C ... +55 °C (up to max. +70 °C) (2) (4)			-25 °C ... +55 °C (up to max. +70 °C) (4) (5)
	no condensation permitted			
Storage temperature	-25 °C ... +85 °C			
Housing	plastic, for DIN rail mounting			
Pollution Degree	2			
Protection category	IP20			
Tolerable loading referring to humidity	according to EN 61131-2			
Voltage of insulation	≥500 V			
Weight	120 g			
Dimensions (W / H / D in mm)	22,5 / 99 / 114			

(1) Loop resistance ≤150 Ω

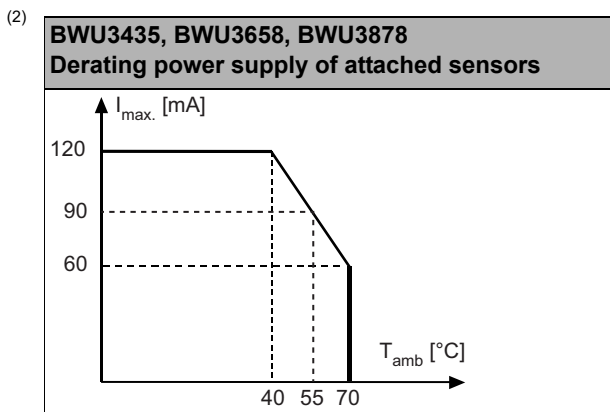

(3) see table "Peripheral fault indication"

(4) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada.

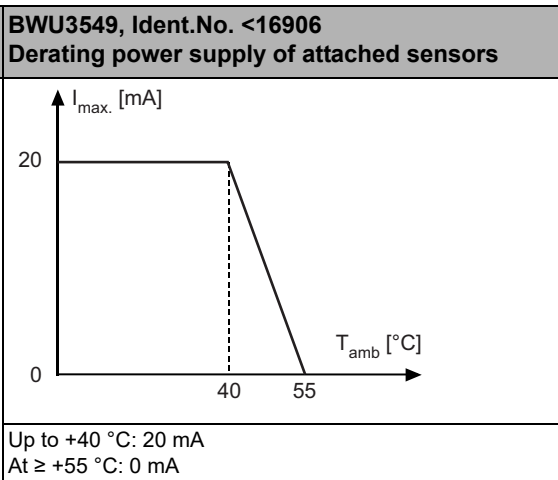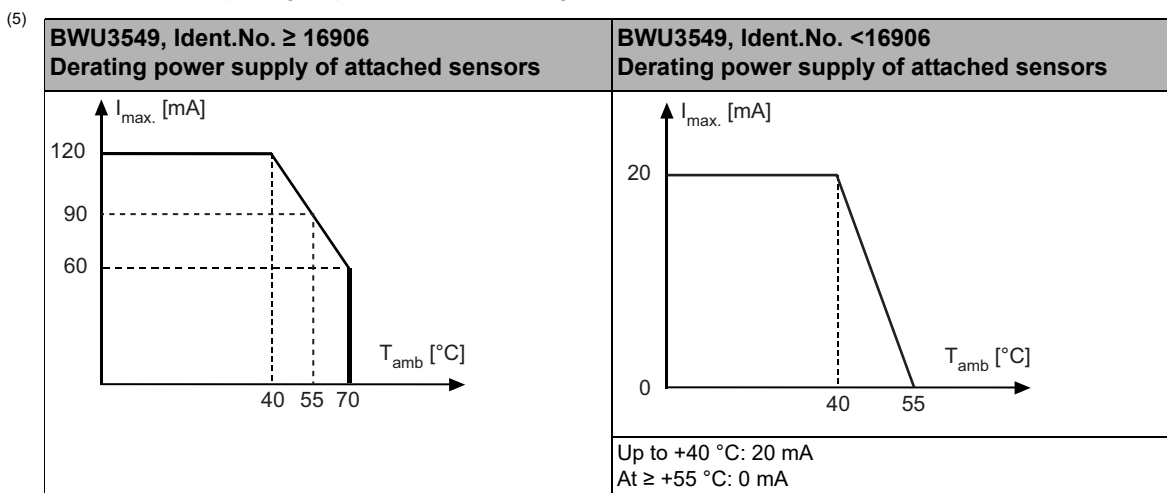

## Digital Modules ASi in IP20, 22,5 mm



### Wiring rules

Push-in terminals	
<b>General</b>	
Nominal cross section	2,5 mm <sup>2</sup>
<b>Conductor cross section</b>	
Conductor cross section solid	0,2 ... 2,5 mm <sup>2</sup>
Conductor cross section flexible	0,2 ... 2,5 mm <sup>2</sup>
Conductor cross section flexible, with ferrule	without plastic sleeve: 0,2 ... 2,5 mm <sup>2</sup>
	with plastic sleeve: 0,25 ... 2,5 mm <sup>2</sup>
2 conductors with same cross section, stranded, with TWIN ferrules	without plastic sleeve: 0,5 ... 1,5 mm <sup>2</sup>
AWG	24 ... 14
Stripped insulation length	10 mm

UL-specifications (UL508)	
External protection	An isolated source with a secondary open circuit voltage of $\leq 30 V_{DC}$ with a 3 A maximum over current protection. Over current protection is not required when a Class 2 source is employed.
In general	UL mark does not provide UL certification for any functional safety rating or aspects of the above devices.

Article no.	Peripheral fault indication	
	Overload sensor supply	AUX voltage missing
BWU1938	-	•
BWU2490	-	•
BWU2721	-	•
BWU2723	-	•
BWU2759	-	•
BWU2783	•	-
BWU2800	-	•
BWU3265	•	-
BWU3266	•	•
BWU3267	•	•
BWU3268	•	•
BWU3272	•	-
BWU3359	-	•
BWU3364	•	•
BWU3435	•	-
BWU3549	•	-
BWU3559	-	•
BWU3658	•	-
BWU3733	-	•
BWU3747	•	-
BWU3754	•	•
BWU3842	-	•
BWU3878	•	-

# Digital Modules ASi in IP20, 22,5 mm



Programming	Bit setting			
	D3	D2	D1	D0
	Input			
BWU1938 / BWU2723 / BWU2759 / BWU2783 / BWU3265 / BWU3266 / BWU3267 / BWU3268 / BWU3272 / BWU3435 / BWU3549 / BWU3559 / BWU3658 / BWU3733 / BWU3747 / BWU3754 / BWU3842 / BWU3878	I4	I3	I2	I1
BWU2490 / BWU2721 / BWU2800 / BWU3359 / BWU3364	slave 1: I4	slave 1: I3	slave 1: I2	slave 1: I1
	slave 2: I8	slave 2: I7	slave 2: I6	slave 2: I5
	output			
BWU1938 / BWU2759 / BWU2783 / BWU3267 / BWU3268 / BWU3272 / BWU3435 / BWU3549 / BWU3559 / BWU3658 / BWU3754 / BWU3842	O4	O3	O2	O1
BWU3373, BWU3878	–	O3	O2	O1
BWU2490 / BWU2800 / BWU3359 / BWU3364	slave 1: O4	slave 1: O3	slave 1: O2	slave 1: O1
	slave 2: O8	slave 2: O7	slave 2: O6	slave 2: O5

Programming	Bit setting			
	parameter bit			
	P3	P2	P1	P0
BWU3364 / BWU2723 / BWU2721 / BWU3265 / BWU3266	not used	0 = on / 1 = off (synchronous I/O mode)	0 = on / 1 = off (data input filter 128 µs)	0 = off / 1 = on (peripheral fault, if AUX voltage missing)
BWU1938 / BWU2759 / BWU2783 / BWU3267 / BWU3268 / BWU3272 / BWU3435 / BWU3549 / BWU3559 / BWU3658 / BWU3733 / BWU3754 / BWU3842 / BWU3878				0 = off / 1 = on (watchdog)
BWU2490 / BWU2800 / BWU3359 / BWU3747				not used, watchdog always on

## Connections

Name	Explanation
I <sub>x</sub>	digital input x
O <sub>x</sub>	digital output x
O <sub>x3</sub> , O <sub>x4</sub>	relay output x
I <sub>+</sub> , I <sub>-</sub> , I <sub>+</sub> <sub>n</sub> , I <sub>-</sub> <sub>n</sub>	sensor supply
O <sub>-</sub> <sub>n</sub>	GND for outputs (PNP)
O <sub>+</sub> <sub>n</sub>	GND for outputs (NPN)
AUX <sup>+</sup> <sub>ext.in</sub>	power supply, out of external voltage, positive pole (AUX, actuator supply)
AUX <sup>-</sup> <sub>ext.in</sub>	power supply, out of external voltage, negative pole (AUX, actuator supply)
ASi <sup>+</sup> , ASi <sup>-</sup>	connection to ASi bus
ADDR	connection for ASi addressing device
n.c. (not connected)	not connected

# Digital Modules ASi in IP20, 22,5 mm



Connections		
<p><b>BWU3265</b></p>	<p><b>BWU3266</b></p>	<p><b>BWU2723</b></p>
<p><b>BWU2783 / BWU3272</b></p>	<p><b>BWU1938 / BWU2759 / BWU3559 / BWU3842</b></p>	<p><b>BWU2721</b></p>
<p><b>BWU3267 / BWU3268</b></p>	<p><b>BWU2490 / BWU2800 / BWU3364</b></p>	<p><b>BWU3359</b></p>

# Digital Modules ASI in IP20, 22,5 mm






Connections		
<b>BWU3733</b> <p>Terminal block diagram for BWU3733. It shows a 4-pin terminal block with pins I1, I2, I3, I4. Below it are two 4-pin blocks for O1, O2, O3, n.c. and ASI+, ASI-, AUX+, AUX-. There are also terminals for FAULT, ASI, and ADDR.</p>	<b>BWU3747</b> <p>Terminal block diagram for BWU3747. It shows a 4-pin terminal block with pins I1, I2, I3, I4. Below it are terminals for FAULT, ASI, and ADDR.</p>	
<b>BWU3435</b> <p>Terminal block diagram for BWU3435. It shows a 4-pin terminal block with pins O1, O2, O3, O4. Below it are two 4-pin blocks for I1, I2, I3, I4 and O1, O2, O3, O4. There are also terminals for FAULT, ASI, and ADDR.</p>	<b>BWU3549</b> <p>Terminal block diagram for BWU3549. It shows a 4-pin terminal block with pins O1, O2, O3, O4. Below it are two 4-pin blocks for I1, I2, I3, I4 and O1, O2, O3, O4. There are also terminals for FAULT, ASI, and ADDR.</p>	<b>BWU3658</b> <p>Terminal block diagram for BWU3658. It shows a 4-pin terminal block with pins O1, O2, O3, O4. Below it are two 4-pin blocks for I1, I2, I3, I4 and O1, O2, O3, O4. There are also terminals for FAULT, ASI, and ADDR.</p>
<b>BWU3754</b> <p>Terminal block diagram for BWU3754. It shows a 4-pin terminal block with pins I1, I2, I3, I4. Below it are two 4-pin blocks for O1, O2, O3, O4 and I1, I2, I3, I4. There are also terminals for FAULT, ASI, and ADDR.</p>	<b>BWU3878</b> <p>Terminal block diagram for BWU3878. It shows a 4-pin terminal block with pins n.c., n.c., O1, O4. Below it are two 4-pin blocks for O1, O2, O3, O4 and I1, I2, I3, I4. There are also terminals for FAULT, ASI, and ADDR.</p>	




# Digital Modules ASi in IP20, 22,5 mm



## Power supply PNP

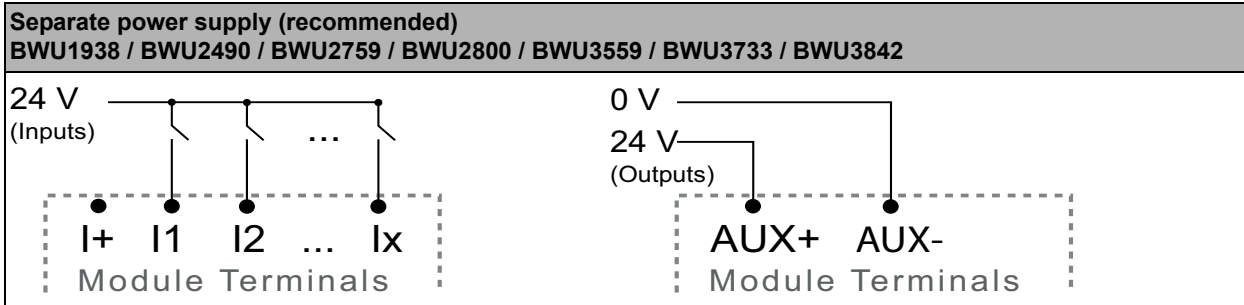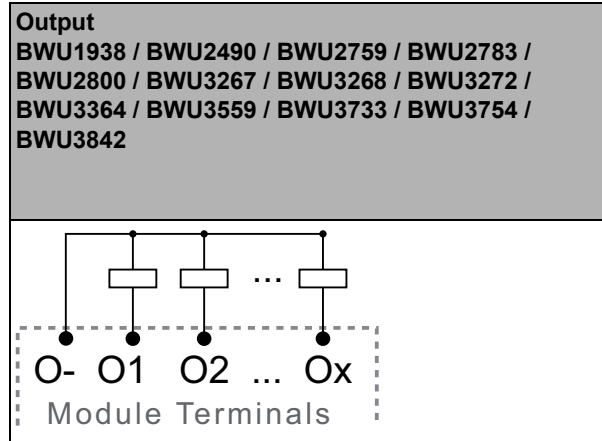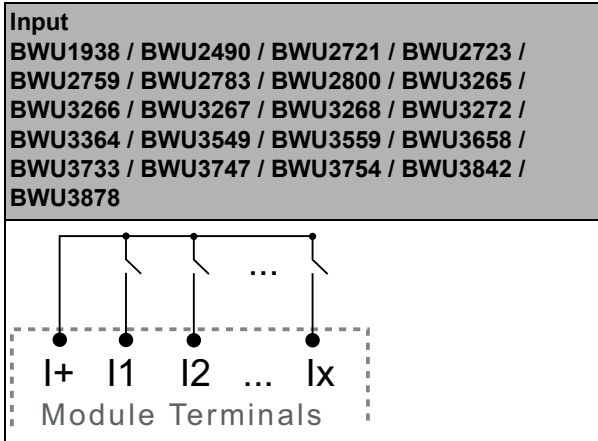



## Power supply NPN

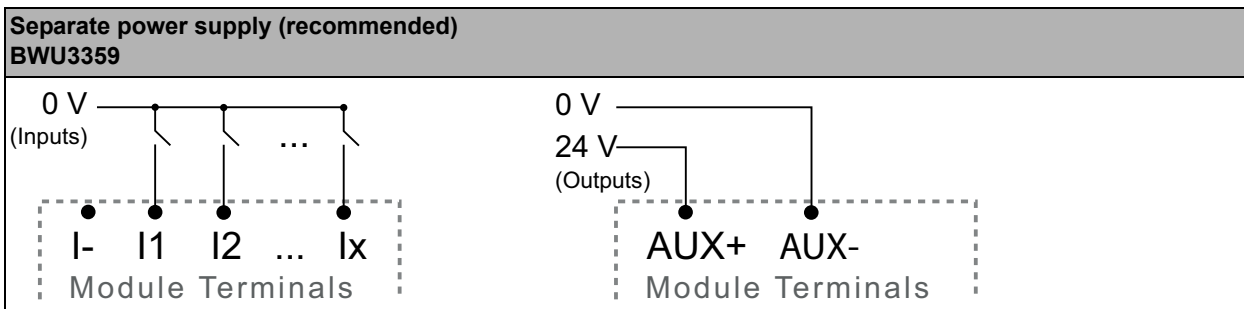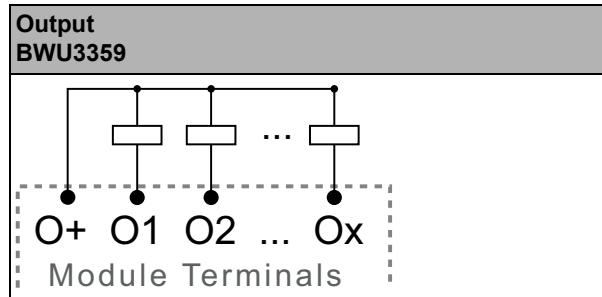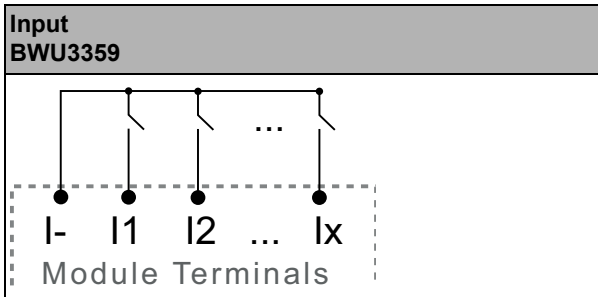

# Digital Modules ASi in IP20, 22,5 mm



## Connection relay output

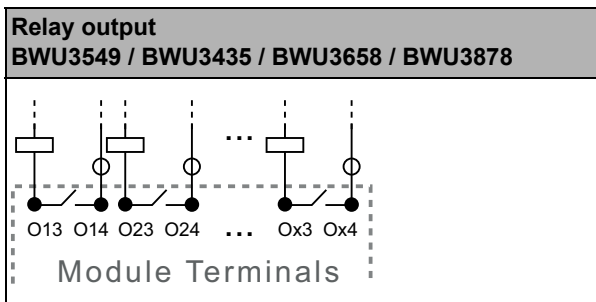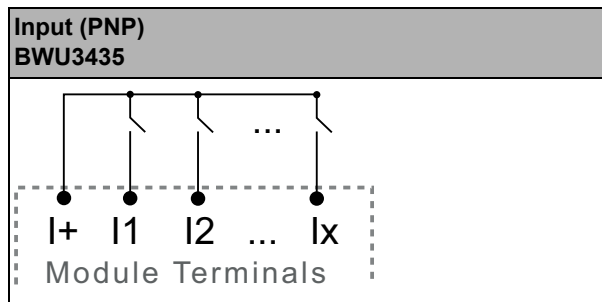



# SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

# [www.scatts.co.uk](http://www.scatts.co.uk)