




# Z-D-OUT

## 5-CH DIGITAL OUTPUT MODULE / RS485 MODBUS RTU



Z-D-OUT is 5 SPST relay output module with common line, capacity 5 A – 250 Vac resistive, 2 A inductive. The module has removable terminals with section of 2.5 mm<sup>2</sup>. Z-D-OUT offers possibility of setting relay safety status at start-up or without communication. Also the module allows safety time setting from 0,5 to 2,5 s. RS485 serial communication supports Modbus-Rtu protocol, maximum 32 nodes. Max 3-way isolation module is 1.500Vac.

### TECHNICAL SPECIFICATIONS

#### Electrical Specifications

Power supply	10..40 Vdc / 19..28 Vac / 50-60 Hz
Power consumption	1,5 W
Isolation	1.500 Vac (3 way)
Power transducers	Yes
Status Indicators	Power Fail Rx / Tx Active output
Protection Degree	IP20

#### Thermomechanical Specifications

Operating Temperature	-10..+65 °C
Dimension (W x H x D)	17.5 x 100 x 112 mm
Weight	About 140 g
Enclosure	Nylon 6 with 30% glass-fiber, V0 self-extinguished class
Connections	-Removable terminals block, plug in connectors, max wire size 2,5 mm <sup>2</sup> -Rear IDC10 connector for Z-PC backplane
Mounting	35 mm DIN rail guide

#### Communication, Memory process

Interface	2 wire RS485
Speed	Up to 57.600 bps
Protocol	ModBUS RTU slave
Communication Time	< 10 ms (38400 baud)
Distance	Up to 1.200 m
Connectivity	Max 32 nodes
Data Memory	EEPROM for the configuration parameters, retention time 10 years, N° 5 registers 16 bit, N° 5 bit overflow


#### Signals

Channel Numbers	5
Type	SPST N.O. relay output with common line Max rated current: 5 A Max switching voltage: 250 Vac Relay working voltage: 24 Vdc Relay absorbed current: 9 mA Release time delay: 5 / 2 ms

#### Configuration

DIP switches	Baud rate, node, parity, serial port, bit stop, termination line
Software	Z-NET3 (Iec 61131) EASY Z-D-IN (plug&play)
Standard	
Approval	CE, RINA
Norms	EN 50081-2; EN 55011; EN 50082-2; EN 61000-2-2/4; EN 50140/141; EN 61010-1

### APPLICATION NOTE

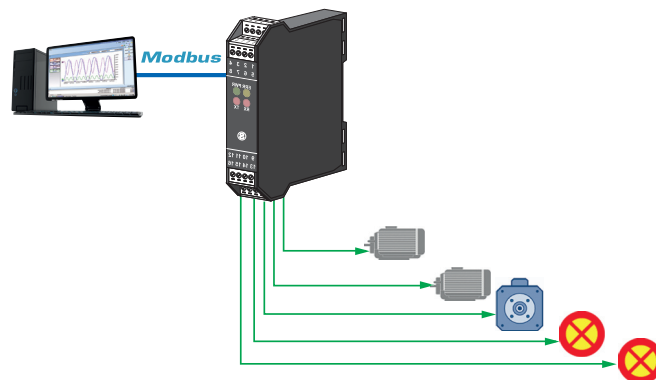

### ORDER CODES

Code	Description
Z-D-OUT	5-CH Digital output module / RS485 ModBUS RTU, 10..40 Vdc / 19..28 Vac

### ACCESSORIES & SOFTWARE

<b>Z-PC-DIN</b> Backplane for power & bus communication pg. 36	<b>Z-SUPPLY</b> Switching power supply pg. 36	<b>Z-NET</b> IEC 61331 programming software pg. 36	<b>EASY SETUP</b> Plug&Play configuration software pg. 36

### SIMILAR PRODUCTS

<b>Z-10-D-OUT</b> 10-CH Digital Output module / RS485 pg. 13	<b>Z-D-10</b> 8-CH, 6 digital input - 2 digital outputs control module pg. 14	<b>ZC-24-DO</b> 24 CH digital output CANopen / ModBUS pg. 29	<b>ZC-16DI-8DO</b> 16 CH digital input - 8 CH digital output CANopen / ModBUS pg. 30



# SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

# [www.scatts.co.uk](http://www.scatts.co.uk)