



## MICRO SWITCH Premium Large Basic Switches

BZ | BA | BM | BE | 6AS Series

**004955**

Issue 6

**Datasheet**



### DESCRIPTION

Accurate, reliable, and repeatable, Honeywell MICRO SWITCH BZ/BA/VBM/BE Premium Series switches are designed and manufactured for a wide variety of applications with over 75 years of experience. The internal flat-spring design is ideal for applications requiring precision switch characteristics and long life. These precision switches are available with differential travel less than 0,0254 mm [0.001 in].

Catalog listings within these Series of switches are available to control a wide range of electrical loads from logic level to power duty switching coupled with a wide variety of integral actuators. A variety of electrical connections are available to match the application requirements. These Series of switches fit the standard 25,4 mm [1.00 in] mounting centers. Select catalog listings are available with a threaded plunger bushing panel mounting. Auxiliary actuators are available to increase the flexibility of the Premium Series switches as well as metal or plastic enclosures where required. These switches can be supplied factory gang-mounted (two switches) with an integral actuator for double pole applications or other circuit applications.

Most of these switch Series have agency certifications for global applications. In addition, select catalog listings are qualified to MIL-PRF-8805 for military applications.

### VALUE TO CUSTOMERS

- MICRO SWITCH legacy and expertise with over 75 years of engineering and application experience
- Worldwide availability through Honeywell's global network
- Dependable performance; up to 20 million mechanical cycles

### FEATURES

- Switch styles; momentary plunger, manual reset plunger, make-before-break contacts, sequential contacts, double break contacts, split contacts
- Standard package size 49,3 L x 17,5 W x 24,1 H mm [1.94 x 0.69 x 0.93 in]
- Mounts on standard 25,4 mm centers [1.00 in] or threaded plunger bushing
- Wide selection of integral actuators including: pin plunger, roller plunger, overtravel plunger, integral leaf with or without roller, plain lever, roller lever, one-way roller lever
- Fine silver contacts, silver-alloy contacts, or gold-alloy contacts
- Electrical connection options; solder terminals, screw terminals, or quick-connect terminals
- Optional sealed plunger and cover
- Auxiliary actuators available
- Optional metal or plastic enclosures available where required
- Gang-mount assemblies (tandem assemblies) with single integral lever
- Global certification: UL, CSA, CE, and ENEC for most catalog listings
- Select switches are qualified to MIL-PFR-8805

### POTENTIAL APPLICATIONS

- Building controls and equipment
- Doors and lifts
- Semi-trucks and trailers
- Valves
- Industrial timers
- Communication systems
- Foot switches
- Commercial and industrial food service equipment
- Agriculture irrigation equipment
- Medical instrumentation

### DIFFERENTIATION

- Standard temperature range of -55 °C to 85 °C [-67 °F to 185 °F], option to 204 °C [400 °F]
- Current carrying capability of up to 25 A
- Stainless steel snap spring available for demanding environments
- Selection of special circuitries; make-before-break contacts, sequential contacts, double break contacts, single-pulse output

### PORTFOLIO

In addition to the large basic switches, Honeywell offers V-Basic switches, miniature, miniature watertight, sub-miniature, and special application switches.

## MICRO SWITCH Premium Large Basic Switches

**Table 1. Specifications**

| Characteristic                   | BZ Series                                                                              | WZ Series | YZ Series | BA Series                                                                         | WA Series | YA Series | BM Series                                                                          | BE Series                                                                           |
|----------------------------------|----------------------------------------------------------------------------------------|-----------|-----------|-----------------------------------------------------------------------------------|-----------|-----------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                                  |       |           |           |  |           |           |  |  |
| Ampere rating                    | 15 A                                                                                   |           |           | 20 A                                                                              |           |           | 22 A                                                                               | 25 A                                                                                |
| Circuitry                        | SPDT                                                                                   | SPNC      | SPNO      | SPDT                                                                              | SPNC      | SPNO      | SPDT                                                                               | SPDT                                                                                |
| Operating force                  | 1.0 oz to 28 oz                                                                        |           |           |                                                                                   |           |           |                                                                                    |                                                                                     |
| Termination                      | quick connect, solder, screw                                                           |           |           |                                                                                   |           |           |                                                                                    |                                                                                     |
| Actuator                         | pin plunger, overtravel plunger, straight, roller, flexible leaf roller, flexible leaf |           |           |                                                                                   |           |           |                                                                                    |                                                                                     |
| Voltage                          | 125 Vac, 250 Vac, 125 Vdc, 250 Vdc                                                     |           |           |                                                                                   |           |           |                                                                                    |                                                                                     |
| Agency approvals                 | UL, CSA, ENEC, CE (varies by specific model)                                           |           |           |                                                                                   |           |           |                                                                                    |                                                                                     |
| Operating temperature            | -55 °C to 85 °C [-67 °F to 185 °F]                                                     |           |           |                                                                                   |           |           |                                                                                    |                                                                                     |
| Contacts                         | silver, silver cadmium oxide, gold alloy                                               |           |           |                                                                                   |           |           |                                                                                    |                                                                                     |
| Housing                          | general purpose phenolic                                                               |           |           |                                                                                   |           |           |                                                                                    |                                                                                     |
| Sealing                          | Environment sealing option available (options for IP64 Sealing)                        |           |           |                                                                                   |           |           |                                                                                    |                                                                                     |
| Dielectric strength              | 2000 V between each terminal and ground                                                |           |           |                                                                                   |           |           |                                                                                    |                                                                                     |
| Contact resistance               | 15 m Ohm max. (initial)                                                                |           |           |                                                                                   |           |           |                                                                                    |                                                                                     |
| Insulation resistance            | 100,000 M Ohm min.                                                                     |           |           |                                                                                   |           |           |                                                                                    |                                                                                     |
| Vibration                        | 1,5 mm peak-to-peak amplitude, frequency 10 Hz to 55 Hz, for two continuous hours      |           |           |                                                                                   |           |           |                                                                                    |                                                                                     |
| Expected mechanical life         | up to 20,000,000 cycles at 95% survival                                                |           |           |                                                                                   |           |           |                                                                                    |                                                                                     |
| Expected electrical service life | 100K operations at rated load                                                          |           |           |                                                                                   |           |           |                                                                                    |                                                                                     |
| Rated frequency                  | 50 Hz/60 Hz                                                                            |           |           |                                                                                   |           |           |                                                                                    |                                                                                     |

## MICRO SWITCH Premium Large Basic Switches

### ELECTRICAL DATA AND UL CODES

Table 2. UL Electrical Ratings

| Code | Circuitry                 | Electrical data and UL codes                                                                                                                              |
|------|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| A    | SPDT                      | 15 A, 125, 250, or 480 Vac;<br>1/8 HP, 125 Vac; 1/4 HP, 250 Vac;<br>1/2 A, 125 Vdc; 1/4 amp, 250 Vdc;<br>UL Code L96                                      |
| B    | SPDT                      | 5 A, 125, 250, or 480 Vac;<br>1/2 A, 125 Vdc; 1/4 amp, 250 Vdc;<br>UL Code L35                                                                            |
| C    | SPDT                      | 10 A, 125, 250, or 480 Vac;<br>UL Code L8                                                                                                                 |
| D    | SPDT                      | 15 A, 125, 250, or 480 Vac;<br>1/8 HP, 125 Vac; 1/4 HP, 250 Vac;<br>UL Code L103                                                                          |
| E    | SPDT                      | 15 A, 125, 250, or 480 Vac;<br>1/4 HP, 125 Vac; 1/2 HP, 250 Vac;<br>1/2 A, 125 Vdc; 1/4 amp, 250 Vdc;<br>UL Code L67                                      |
| F    | SPDT                      | 22 A, 125, 250, or 480 Vac;<br>1/2 HP, 125 Vac; 1 HP, 250 Vac;<br>UL Code L161                                                                            |
| G    | SPDT                      | 20 A, 125, 250, or 480 Vac;<br>10 A, 125 Vac "L" (tungsten lamp load);<br>1 HP, 125 Vac; 2 HP, 250 Vac;<br>1/2 A, 125 Vdc; 1/4 A, 250 Vdc;<br>UL Code L23 |
| H    | SPDT                      | Motor control - 25 A, 125, 250, or 480 Vac;<br>1 HP, 125 Vac; 2 HP, 250 Vac;<br>Pilot duty—750 VA, 125, 250, or 277 Vac                                   |
| I    | SPDT                      | 10 A, 125, 250, or 480 Vac;<br>1/8 HP, 125 Vac; 1/4 HP, 250 Vac;<br>UL Code L95                                                                           |
| P    | SPDT                      | 1 A, 125 Vac;<br>UL Code L22                                                                                                                              |
| T    | Two-circuit, double break | Motor Control<br>15 A, 120, 240, 480, or 600 Vac;<br>1/2 HP, 120 Vac; 1 HP, 240 Vac;<br>0.8 amp, 115 Vdc; 0.4 amp, 230 Vdc.                               |
| W    | SPST                      | 20 A, 125, 250, or 277 Vac;<br>3/4 HP, 125 Vac; 1/2 HP, 250 Vac;<br>UL Code L178B                                                                         |
| X    | SPDT                      | 15 A, 125, 250, or 480 Vac;<br>2 A, 600 Vac; 1/8 HP, 125 Vac;<br>1/4 HP, 250 Vac; 1/2 amp, 125 Vdc;<br>1/4 amp, 250 Vdc; UL Code L74                      |

### GENERAL SWITCH IDENTIFICATION

The first letter in the catalog listing designates:

**B** = Single pole, double throw

**W** = Single pole, normally closed

**Y** = Single pole, normally open

The second letter in the catalog listing designates:

**Z** = Standard, 15 A version

**M** = 22 A version

**A** = Standard, 20 A version

**E** = 25 A version

### MOUNTING DIMENSIONS

Mounting dimensions are included in this datasheet. They are shown in English and metric equivalents. These dimensions are for reference only. Engineering drawings may be accessed via the Honeywell web site: [sensing.honeywell.com](http://sensing.honeywell.com).

Mounting holes for Types BZ, BM, BA, BE, and 6AS switches accept pins or screws of 3,53 mm [0.139 in] diameter.

### RECOMMENDED TORQUE

Mounting screws. . . . . 0,39 Nm [3 in-lb]\*

Terminal screws. . . . . 0,45 Nm [4 in-lb]

Panel mount bushing . 0,45 Nm to 0,68 Nm [4 in-lb to 6 in-lb]

\*Note: Tightening mounting screws above 0,3 Nm [3 in-lb] changes operating characteristics and increases the possibility of cracking the case.

### UL/CSA

Honeywell basic switches are Component Recognized by Underwriters' Laboratories, Inc. and certified by Canadian Standards Association. The BA, BZ, and BM line is covered as Special Use Switches to UL Standard 1054; the BE line is covered as an Industrial Product to UL Standard 508. Agency File References are:

- BA Series: UL File E12252, CSA File 4442
- BM Series: UL File E12252, CSA File 4442
- BZ Series: UL File E12252, CSA File 4442
- BE-Series: UL File E22779, CSA File 4442

# MICRO SWITCH Premium Large Basic Switches

O.F. • Operating force  
R.F. • Release force  
P.T. • Pretravel  
O.T. • Overtravel  
D.T. • Differential travel  
O.P. • Operating position

## ORDER GUIDE BY ASCENDING ELECTRICAL CAPABILITY

|                                                                                                    | Catalog Listing        | Recommended For                                          | Electrical Data and UL Codes | O.F. N [oz]                                     | R.F. min. N [oz] | P.T. max. mm [in] | O.T. min. mm [in]             | D.T. mm [in]                      | O.P.*** mm [in]             |
|----------------------------------------------------------------------------------------------------|------------------------|----------------------------------------------------------|------------------------------|-------------------------------------------------|------------------|-------------------|-------------------------------|-----------------------------------|-----------------------------|
| BZ/BA type<br>     | BZ-2R72-A2**           | Applications requiring gold alloy contacts               | 1 A P                        | 2,5 to 3,61 [9 to 13]                           | 1,11 [4]         | 0,38 [0.015]      | 0,13 [0.005]                  | 0,01 to 0,05 [0.0004 to 0.0020]   | 15,88 [0.625]               |
|                                                                                                    | BZ-2R725551-A2         | Gold alloy contacts; Dustproof and splash resistant seal | 1 A P                        | 2,22 to 4,17 [8 to 15]                          | 1,11 [4]         | –                 | 0,13 [0.005]                  | 0,01 to 0,06 [0.0004 to 0.0025]   | 15,88 [0.625]               |
|                                                                                                    | BZ-2R244-A2            | Operating in temp. to 204 °C [400 °F] for 100 hours      | 5 A B                        | 2,5 to 3,61 [9 to 13]                           | 1,11 [4]         | 0,38 [0.015]      | 0,13 [0.005]                  | 0,01 to 0,05 [0.0004 to 0.0020]   | 15,88 [0.625]               |
|                                                                                                    | BZ-R21-A2              | Lower force                                              | 10 A C                       | 1,11 [4]                                        | 0,7 [2.5]        | 0,30 [0.012]      | 0,13 [0.005]                  | 0,005 to 0,013 [0.0002 to 0.0005] | 15,88 [0.625]               |
|                                                                                                    | BZ-2R-A2               | Most applications SPDT                                   | 15 A A                       | 2,5 to 3,61 [9 to 13]                           | 1,11 [4]         | 0,38 [0.015]      | 0,13 [0.005]                  | 0,01 to 0,05 [0.0004 to 0.0020]   | 15,88 [0.625]               |
|                                                                                                    | WZ-2R-A2               | SPST (normally closed)                                   | 15 A A                       | 2,5 to 3,61 [9 to 13]                           | 1,11 [4]         | 0,38 [0.015]      | 0,13 [0.005]                  | 0,01 to 0,05 [0.0004 to 0.0020]   | 15,88 [0.625]               |
|                                                                                                    | YZ-2R-A2               | SPST (normally open)                                     | 15 A A                       | 2,5 to 3,61 [9 to 13]                           | 1,11 [4]         | 0,38 [0.015]      | 0,13 [0.005]                  | 0,01 to 0,05 [0.0004 to 0.0020]   | 15,88 [0.625]               |
| Sealed type<br>  | BZ-R-A2                | Less differential travel                                 | 15 A D                       | 1,95 to 2,5 [7 to 9]                            | 1,11 [4]         | 0,30 [0.012]      | 0,13 [0.005]                  | 0,005 to 0,008 [0.0002 to 0.0003] | 15,88 [0.625]               |
|                                                                                                    | BZ-R19-A2              | Best repeatability                                       | 15 A D                       | 1,95 to 3,34 [7 to 12]                          | 1,11 [4]         | 0,30 [0.012]      | 0,13 to 0,2 [0.005 to 0.008]  | 0,005 to 0,02 [0.0002 to 0.0008]  | 16,26 [0.640]               |
|                                                                                                    | BZ-2R24-A2             | Operating in temp. to 121 °C [250 °F]                    | 15 A A                       | 2,5 to 3,61 [9 to 13]                           | 1,11 [4]         | 0,38 [0.015]      | 0,13 [0.005]                  | 0,01 to 0,05 [0.0004 to 0.0020]   | 15,88 [0.625]               |
|                                                                                                    | BZ-2RT04 (M8805/1-004) | MIL-PRF-8805 application requirements                    | 15 A A                       | 2,5 to 3,61 [9 to 13]                           | 1,67 [6]         | 0,38 [0.015]      | 0,13 [0.005]                  | 0,01 to 0,05 [0.0004 to 0.0020]   | 15,88 [0.625]               |
|                                                                                                    | BZ-2R05-A2             | Stability under varying humidity                         | 15 A A                       | 2,5 to 3,61 [9 to 13]                           | 1,11 [4]         | 0,38 [0.015]      | 0,13 [0.005]                  | 0,01 to 0,05 [0.0004 to 0.0020]   | 15,88 [0.625]               |
|                                                                                                    | BZ-2R5551-A2           | Dustproof and splash resistant seal                      | 15 A A                       | 2,5 to 4,17 [9 to 15]                           | 1,11 [4]         | –                 | 0,13 [0.005]                  | 0,01 to 0,06 [0.0004 to 0.0025]   | 15,88 [0.625]               |
|                                                                                                    | BZ-2R55-A2-S           | Sealed construction; stainless steel internal snapspring | 15 A A                       | 2,5 to 4,17 [9 to 15]                           | 1,11 [4]         | –                 | 0,13 [0.005]                  | 0,01 to 0,06 [0.0004 to 0.0025]   | 15,88 [0.625]               |
| BA/BE type<br>   | BA-2R-A2               | Up to 20 ampere load                                     | 20 A G                       | 3,89 to 6,12 [14 to 22]                         | 2,78 [10]        | 1,27 [0.050]      | 0,25 [0.10]                   | 0,05 to 0,19 [0.0020 to 0.0075]   | 16,26 [0.640]               |
|                                                                                                    | BA-2R24-A2             | Operating in temp. to 121 °C [250 °F]                    | 20 A G                       | 3,89 to 6,12 [14 to 22]                         | 2,78 [10]        | 1,27 [0.050]      | 0,25 [0.10]                   | 0,05 to 0,19 [0.0020 to 0.0075]   | 16,26 [0.640]               |
|                                                                                                    | BM-1R-A2               | Up to 22 ampere load                                     | 22 A F                       | 1,95 to 2,78 [7 to 10]                          | 1,11 [4]         | 0,38 [0.015]      | 0,13 [0.005]                  | 0,013 to 0,025 [0.0005 to 0.0010] | 15,88 [0.625]               |
|                                                                                                    | BE-2R-A4               | Up to 25 ampere load; #8 screw terminals                 | 25 A H                       | 3,89 to 6,12 [14 to 22]                         | 2,78 [10]        | 1,27 [0.050]      | 0,25 [0.10]                   | 0,05 to 0,19 [0.0020 to 0.0075]   | 16,26 [0.640]               |
| Manual Reset<br> | BZ-RX                  | Manual reset, solder terminals                           | 15 A E                       | 1,95 to 2,5 [7 to 9]<br>0,56 to 2,78* [2 to 10] | –                | 0,30 [0.012]<br>– | 0,13 [0.005]<br>0,38* [0.015] | –                                 | 15,88 [0.625]               |
|                                                                                                    | WA-1RX-A4              | Manual reset SPST-NC; #8 screw terminals                 | 20 A W                       | 5,56 [20]<br>6,95 [25]*                         | –                | –                 | 0,25 [0.010]<br>–             | 0,20 [0.008]<br>–                 | 16,26 [0.64]<br>27,9*[1.10] |

\* Reset characteristics.

\*\* -A2 is supplied with #6 terminal screws.

\*\*\* Except where stated, ±0,38 mm [±0.015 in].

# MICRO SWITCH Premium Large Basic Switches

O.F. • Operating force  
R.F. • Release force  
P.T. • Pretravel  
O.T. • Overtravel  
D.T. • Differential travel  
O.P. • Operating position

## OVERTRAVEL PLUNGER ORDER GUIDE

|                                                                                     | Catalog Listing         | Recommended For                                                                     | Electrical Data and UL Codes | O.F. N [oz]             | R.F. min. N [oz] | P.T. max. mm [in] | O.T. min. mm [in] | D.T. mm [in]                      | O.P.*** mm [in] |
|-------------------------------------------------------------------------------------|-------------------------|-------------------------------------------------------------------------------------|------------------------------|-------------------------|------------------|-------------------|-------------------|-----------------------------------|-----------------|
|    | BZ-2RD72-A2             | Applications requiring gold alloy contacts                                          | 1 A P                        | 2,5 to 3,61 [9 to 13]   | 1,11 [4]         | 0,38 [0.015]      | 1,52 [0.060]      | 0,01 to 0,05 [0.0004 to 0.0020]   | 21,21 [0.835]   |
|                                                                                     | BZ-2RD-A2               | Added overtravel. For manual operation and slow 20° (max) cam rise                  | 15 A A                       | 2,5 to 3,61 [9 to 13]   | 1,11 [4]         | 0,38 [0.015]      | 1,52 [0.060]      | 0,01 to 0,05 [0.0004 to 0.0020]   | 21,21 [0.835]   |
|                                                                                     | BZ-2RD24-A2             | Operating in temperature to 121 °C [250 °F]                                         | 15 A A                       | 2,5 to 3,61 [9 to 13]   | 1,11 [4]         | 0,38 [0.015]      | 1,52 [0.060]      | 0,01 to 0,05 [0.0004 to 0.0020]   | 21,21 [0.835]   |
|                                                                                     | BM-1RD-A2               | Up to 22 ampere load                                                                | 22 A F                       | 1,95 to 2,78 [7 to 10]  | 1,11 [4]         | 0,38 [0.015]      | 1,52 [0.060]      | 0,013 to 0,025 [0.0005 to 0.0010] | 21,21 [0.835]   |
|    | BZ-2RDS725551-A2        | Applications requiring gold alloy contacts plus dustproof and splash resistant seal | 1 A P                        | 3,61 to 5,28 [13 to 19] | 1,11 [4]         | –                 | 1,52 [0.060]      | 0,01 to 0,063 [0.0004 to 0.0025]  | 28,20 [1.110]   |
|                                                                                     | BZ-2RDS5551-A2          | Dustproof and splash resistant seal                                                 | 15 A A                       | 3,61 to 5,28 [13 to 19] | 1,11 [4]         | –                 | 1,52 [0.060]      | 0,01 to 0,063 [0.0004 to 0.0025]  | 28,20 [1.110]   |
|   | BA-2RB-A2               | Up to 20 ampere load                                                                | 20 A G                       | 3,89 to 6,12 [14 to 22] | 2,78 [10]        | 1,27 [0.050]      | 2,39 [0.094]      | 0,05 to 0,019 [0.0020 to 0.0075]  | 26,20 [1.03]    |
|                                                                                     | BE-2RB-A4               | Up to 25 ampere load; #8 screw terminals                                            | 25 A H                       | 3,89 to 6,12 [14 to 22] | 2,78 [10]        | 1,27 [0.050]      | 2,39 [0.094]      | 0,05 to 0,019 [0.0020 to 0.0075]  | 26,20 [1.03]    |
|  | BZ-2RS72-A2             | Applications requiring gold alloy contacts                                          | 1 A P                        | 2,5 to 3,61 [9 to 13]   | 1,11 [4]         | 0,38 [0.015]      | 1,52 [0.060]      | 0,01 to 0,05 [0.0004 to 0.0020]   | 28,20 [1.110]   |
|                                                                                     | BZ-2RS-A2               | Added overtravel. For in-line operation and with JR aux. actuators                  | 15 A A                       | 2,5 to 3,61 [9 to 13]   | 1,11 [4]         | 0,38 [0.015]      | 1,52 [0.060]      | 0,01 to 0,063 [0.0004 to 0.0025]  | 28,20 [1.110]   |
|                                                                                     | BZ-2RS24-A2             | Operating in temperature to 121 °C [250 °F]                                         | 15 A A                       | 2,5 to 3,61 [9 to 13]   | 1,11 [4]         | 0,38 [0.015]      | 1,52 [0.060]      | 0,01 to 0,05 [0.0004 to 0.0020]   | 28,20 [1.110]   |
|                                                                                     | BZ-2RST04 (M8805/1-012) | MIL-PRF-8805 application requirements                                               | 15 A A                       | 2,5 to 3,61 [9 to 13]   | 1,67 [6]         | 0,38 [0.015]      | 1,52 [0.060]      | 0,01 to 0,05 [0.0004 to 0.0020]   | 28,20 [1.110]   |
|                                                                                     | BZ-RSX                  | Manual reset; solder terminals                                                      | 15 A E                       | 1,95 to 2,64 [7 to 9]   | –                | 0,30 [0.012]      | 0,65 [0.025]      | –                                 | 2,79 [1.11]     |
|                                                                                     | BM-1RS-A2               | Up to 22 ampere load                                                                | 22 A F                       | 1,95 to 2,78 [7 to 10]  | 1,11 [4]         | 0,38 [0.015]      | 1,52 [0.060]      | 0,013 to 0,025 [0.0005 to 0.0010] | 28,20 [1.110]   |
|  | BZ-2RS7225551-A2        | Applications requiring gold alloy contacts plus dustproof and splash resistant seal | 1 A P                        | 2,5 to 4,17 [9 to 15]   | 1,11 [4]         | –                 | 1,52 [0.060]      | 0,01 to 0,063 [0.0004 to 0.0025]  | 28,20 [1.110]   |
|                                                                                     | BZ-2RS5551-A2           | Dustproof and splash resistant seal                                                 | 15 A A                       | 2,5 to 4,17 [9 to 15]   | 1,11 [4]         | –                 | 1,52 [0.060]      | 0,01 to 0,063 [0.0004 to 0.0025]  | 28,20 [1.110]   |

\* ±51 mm [±0.020 in].

\*\*\* Except where stated, ±0,38 mm [±0.015 in].

# MICRO SWITCH Premium Large Basic Switches

O.F. • Operating force  
R.F. • Release force  
P.T. • Pretravel  
O.T. • Overtravel  
D.T. • Differential travel  
O.P. • Operating position

## OVERTRAVEL PLUNGER ORDER GUIDE

|                                                                                    | Catalog Listing          | Recommended For                                                                                | Electrical Data and UL Codes | O.F. N [oz]             | R.F. min. N [oz] | P.T. max. mm [in] | O.T. min. mm [in] | D.T. mm [in]                      | O.P.*** mm [in]                           |
|------------------------------------------------------------------------------------|--------------------------|------------------------------------------------------------------------------------------------|------------------------------|-------------------------|------------------|-------------------|-------------------|-----------------------------------|-------------------------------------------|
|    | BZ-2RQ-A2                | Added overtravel. For manual in-line operation and for slow 30° (max) rise cams                | 15 A A                       | 2,5 to 3,61 [9 to 13]   | 1,11 [4]         | 0,38 [0.015]      | 5,56 [0.219]      | 0,01 to 0,05 [0.0004 to 0.0020]   | 38,10 ±0,51 [1.50 ±0.02]                  |
|                                                                                    | BZ-2RQ24-A2              | Operating in temperature to 121 °C [250 °F]                                                    | 15 A A                       | 2,5 to 3,61 [9 to 13]   | 1,11 [4]         | 0,38 [0.015]      | 5,56 [0.219]      | 0,01 to 0,05 [0.0004 to 0.0020]   | 38,10 ±0,51 [1.50 ±0.02]                  |
|    | BZ-2RQ172-A2             | Applications requiring gold alloy contacts                                                     | 1 A P                        | 2,5 to 3,61 [9 to 13]   | 1,11 [4]         | 0,38 [0.015]      | 5,56 [0.219]      | 0,01 to 0,05 [0.0004 to 0.0020]   | 21,82 [0.859]                             |
|                                                                                    | BZ-2RQ1-A2               | BZ-2RQ-A2 type applications with panel mount                                                   | 15 A A                       | 2,5 to 3,61 [9 to 13]   | 1,11 [4]         | 0,38 [0.015]      | 5,56 [0.219]      | 0,01 to 0,05 [0.0004 to 0.0020]   | 21,82 [0.859]                             |
|                                                                                    | BZ-2RQ1T04 (M8805/1-020) | MIL-PRF-8805 application requirements                                                          | 15 A A                       | 2,5 to 3,61 [9 to 13]   | 1,67 [6]         | 0,38 [0.015]      | 5,56 [0.219]      | 0,01 to 0,05 [0.0004 to 0.0020]   | 21,82 [0.859]                             |
|                                                                                    | BZ-2RQ124-A2             | Operating in temperature to 121 °C [250 °F]                                                    | 15 A A                       | 2,5 to 3,61 [9 to 13]   | 1,11 [4]         | 0,38 [0.015]      | 5,56 [0.219]      | 0,01 to 0,05 [0.0004 to 0.0020]   | 21,82 [0.859]                             |
|                                                                                    | BZ-2RN702                | Furnished with unassembled seal boot                                                           | 15 A X                       | 2,5 to 3,61 [9 to 13]   | 1,11 [4]         | 0,38 [0.015]      | 3,18 [0.125]      | 0,01 to 0,05 [0.0004 to 0.0020]   | 48,4 ±0,50 1.906 [±0.02]                  |
|                                                                                    | BZ-RQ1X                  | Manual reset; Solder terminals                                                                 | 15 A E                       | 1,67 to 2,64 [6 to 9.5] | -                | 0,30 [0.012]      | 5,56 [0.219]      | -                                 | 23,42 ±1,14 [0.922 ±0.045] 7,14* [0.281*] |
|                                                                                    | BA-2RQ1-A2               | Up to 20 ampere load                                                                           | 20 A G                       | 3,89 to 6,12 [14 to 22] | 2,78 [10]        | 1,27 [0.050]      | 5,56 [0.219]      | 0,05 to 0,19 [0.0020 to 0.0075]   | 21,82 [0.859]                             |
|                                                                                    | BM-1RQ1-A2               | Up to 22 ampere load                                                                           | 22 A F                       | 1,95 to 2,78 [7 to 10]  | 1,11 [4]         | 0,38 [0.015]      | 5,56 [0.219]      | 0,013 to 0,025 [0.0005 to 0.0010] | 21,82 [0.859]                             |
|  | BZ-2RQ1872-A2            | Applications requiring gold alloy contacts                                                     | 1 A P                        | 2,5 to 3,61 [9 to 13]   | 1,11 [4]         | 0,38 [0.015]      | 3,56 [0.140]      | 0,01 to 0,05 [0.0004 to 0.0020]   | 33,32 ±1,14 [1.31 ±0.045]                 |
|                                                                                    | BZ-2RQ18-A2              | Added overtravel. Roller plunger for rapid cam (30° max) rise and slide operation. Panel mount | 15 A A                       | 2,5 to 3,61 [9 to 13]   | 1,11 [4]         | 0,38 [0.015]      | 3,56 [0.140]      | 0,01 to 0,05 [0.0004 to 0.0020]   | 33,32 ±1,14 [1.31 ±0.045]                 |
|                                                                                    | BZ-2RQ1824-A2            | Operating in temperature to 121 °C [250 °F]                                                    | 15 A A                       | 2,5 to 3,61 [9 to 13]   | 1,11 [4]         | 0,38 [0.015]      | 3,56 [0.140]      | 0,01 to 0,05 [0.0004 to 0.0020]   | 33,32 ±1,14 [1.31 ±0.045]                 |
|                                                                                    | BZ-2AQ18T1               | Double-break circuitry                                                                         | 15 A T                       | 3,89 to 6,68 [14 to 24] | 1,11 [4]         | 0,69 [0.025]      | 3,58 [0.141]      | 0,03 to 0,10 [0.001 to 0.004]     | 33,35 ±1,19 [1.31 ±0.047]                 |
|                                                                                    | BM-1RQ18-A2              | Up to 22 ampere load                                                                           | 22 A F                       | 1,95 to 2,78 [7 to 10]  | 1,11 [4]         | 0,38 [0.015]      | 3,56 [0.140]      | 0,013 to 0,025 [0.0005 to 0.0010] | 33,32 ±1,14 [1.31 ±0.045]                 |
|  | BZ-2RQ181-A2             | Applications requiring roller plunger 90° to major axis of switch                              | 15 A A                       | 2,5 to 3,61 [9 to 13]   | 1,11 [4]         | 0,38 [0.015]      | 3,56 [0.140]      | 0,01 to 0,05 [0.0004 to 0.0020]   | 33,32 ±1,14 [1.31 ±0.045]                 |

\* Reset characteristics

\*\* Except where stated, ±0,76 mm [±0.030 in]

\*\*\* Except where stated, ±0,38 mm [±0.015 in].

# MICRO SWITCH Premium Large Basic Switches

O.F. • Operating force  
R.F. • Release force  
P.T. • Pretravel  
O.T. • Overtravel  
D.T. • Differential travel  
O.P. • Operating position

## STRAIGHT LEVER ORDER GUIDE

|                                                                                     | Catalog Listing         | Recommended For                                                     | Electrical Data and UL Codes | O.F. N [oz]                 | R.F. min. N [oz] | P.T. max. mm [in] | O.T. min. mm [in]                   | D.T. mm [in]                     | O.P.*** mm [in]                      |
|-------------------------------------------------------------------------------------|-------------------------|---------------------------------------------------------------------|------------------------------|-----------------------------|------------------|-------------------|-------------------------------------|----------------------------------|--------------------------------------|
|    | BZ-2RW8072-A2           | Applications requiring gold alloy contacts                          | 1 A<br>P                     | 0,7<br>[2.5]                | 0,14<br>[0.5]    | –                 | 5,56<br>[0.219]                     | 0,18 to 1,27<br>[0.007 to 0.050] | 19,1<br>[0.750]                      |
|                                                                                     | BZ-2RW80722555105-A2    | Stability under varying humidity. Gold alloy contacts with seal     | 1 A<br>P                     | 0,7<br>[2.5]                | 0,14<br>[0.5]    | –                 | 5,56<br>[0.219]                     | 0,18 to 1,27<br>[0.007 to 0.050] | 19,1<br>[0.750]                      |
|                                                                                     | BZ-2RW8244-A2           | Operating in temp. to 204 °C [400 °F] for 100 hours                 | 5 A<br>B                     | 0,7<br>[2.5]                | 0,14<br>[0.5]    | –                 | 5,56<br>[0.219]                     | 0,18 to 1,27<br>[0.007 to 0.050] | 19,1<br>[0.750]                      |
|                                                                                     | BZ-RW8435-A2            | Lowest operating force (without external return spring)             | 10 A<br>I                    | 0,07<br>[0.25]              | –                | 6,76<br>[0.266]   | 5,56<br>[0.219]                     | 0,08 to 0,38<br>[0.003 to 0.015] | 19,1<br>[0.750]                      |
|                                                                                     | BZ-2RW876T              | 1.25-inch lever                                                     | 15 A<br>A                    | 1,67<br>[6]                 | 0,42<br>[1.5]    | –                 | 0,42<br>[0.141]                     | 0,10 to 0,63<br>[0.004 to 0.025] | 19,1<br>[0.750]                      |
|                                                                                     | BZ-2RW80-A2             | 2.5-inch lever                                                      | 15 A<br>A                    | 0,7<br>[2.5]                | 0,14<br>[0.5]    | –                 | 5,56<br>[0.219]                     | 0,18 to 1,27<br>[0.007 to 0.050] | 19,1<br>[0.750]                      |
|                                                                                     | BZ-2RW84-A2             | Lower force (without external return spring)                        | 15 A<br>A                    | 0,28<br>[1]                 | 0,03<br>[0.125]  | 8,33<br>[0.328]   | 5,56<br>[0.219]                     | 0,18 to 1,27<br>[0.007 to 0.050] | 19,1<br>[0.750]                      |
|                                                                                     | BZ-2RW805551-A2         | Dustproof and splash resistant seal                                 | 15 A<br>A                    | 0,7<br>[2.5]                | 0,14<br>[0.5]    | –                 | 5,56<br>[0.219]                     | 0,18 to 1,27<br>[0.007 to 0.050] | 19,1<br>[0.750]                      |
|                                                                                     | BZ-2RWT04 (M8805/1-044) | MIL-PRF-8805 application requirements                               | 15 A<br>A                    | 0,28 to 0,90<br>[1 to 3.25] | 0,21<br>[0.75]   | 7,52<br>[0.296]   | 4,37<br>[0.172]                     | 2,36<br>[0.093]                  | 19,1<br>[0.750]                      |
|                                                                                     | BZ-2RW824-A2            | Operating in temperature to 121 °C [250 °F]                         | 15 A<br>A                    | 0,7<br>[2.5]                | 0,14<br>[0.5]    | –                 | 5,56<br>[0.219]                     | 0,18 to 1,27<br>[0.007 to 0.050] | 19,1<br>[0.750]                      |
|                                                                                     | BZ-RW80X                | Manual reset, solder terminals                                      | 15 A<br>E                    | 0,63<br>[2.25]              | –                | –                 | 5,56<br>[0.219]<br>0,38*<br>[0.015] | –                                | 19,05<br>[0.750]<br>7,14*<br>[0.281] |
|                                                                                     | BZ-2RW863-A2            | 6-inch lever                                                        | 15 A<br>A                    | 0,28<br>[1]                 | –                | –                 | 12,7<br>[0.50]                      | 0,46 to 3,68<br>[0.018 to 0.145] | 19,1 ±1,52<br>[0.75 ±0.06]           |
|                                                                                     | BA-2RV-A2               | Up to 20 ampere load                                                | 20 A<br>G                    | 0,7<br>[2.5]                | 0,14<br>[0.5]    | 15,88<br>[0.625]  | 1,98<br>[0.078]                     | 2,77 max.<br>[0.109] max.        | 19,1<br>[0.750]                      |
|  | BM-1RW84-A2             | Up to 22 ampere load                                                | 22 A<br>F                    | 0,28<br>[1]                 | 0,03<br>[0.125]  | 7,54<br>[0.297]   | 5,56<br>[0.219]                     | 0,13 to 0,84<br>[0.005 to 0.033] | 19,1<br>[0.750]                      |
|                                                                                     | BE-2RV-A4               | Up to 25 ampere load #8 screw terminals                             | 25 A<br>H                    | 0,7<br>[2.5]                | 0,14<br>[0.5]    | 15,88<br>[0.625]  | 1,98<br>[0.078]                     | 2,77 max.<br>[0.109] max.        | 19,1<br>[0.750]                      |
|                                                                                     | BZ-2RW899-A2            | Adjustable operating point 17 mm to 22 mm [0.67 in to 0.88 in]      | 15 A<br>A                    | 0,7<br>[2.5]                | 0,14<br>[0.5]    | –                 | 3,54***<br>[0.125]                  | 0,18 to 1,27<br>[0.007 to 0.050] | 17,02 to 22,35<br>[0.670 to 0.880]   |
|  | BZ-2RM-A2               | Reverse acting actuator (switch plunger depressed in free position) | 15 A<br>A                    | 1,67<br>[6]                 | 0,28<br>[1]      | 5,56<br>[0.219]   | 5,56<br>[0.219]                     | 0,10 to 0,89<br>[0.004 to 0.035] | 19,1<br>[0.750]                      |

\* Reset characteristics.

\*\* Except where stated ±0,76 mm [±0.030 in].

\*\*\* From 17 mm [0.670 in] O.P.

# MICRO SWITCH Premium Large Basic Switches

O.F. • Operating force  
R.F. • Release force  
P.T. • Pretravel  
O.T. • Overtravel  
D.T. • Differential travel  
O.P. • Operating position

## SIMULATED ROLLER AND ROLLER LEVER ORDER GUIDE

|                                                                                    | Catalog Listing           | Recommended For                                                             | Electrical Data and UL Codes | O.F. N [oz]              | R.F. min. N [oz] | P.T. max. mm [in] | O.T. min. mm [in] | D.T. mm [in]                   | O.P.*** mm [in]                 |
|------------------------------------------------------------------------------------|---------------------------|-----------------------------------------------------------------------------|------------------------------|--------------------------|------------------|-------------------|-------------------|--------------------------------|---------------------------------|
|    | <b>BZ-2RW80147-A2</b>     | 1.05 inch (26,7 mm) (simulated roller) lever applications                   | 15 A A                       | 1,67 [6]                 | 0,42 [1.5]       | –                 | 2,39 [0.094]      | 0,08 to 0,51 [0.003 to 0.020]  | 30,17 [1.188]                   |
|                                                                                    | <b>BZ-2RW80196-A2</b>     | 1.90 inch (48,3 mm) (simulated roller) lever applications                   | 15 A A                       | 0,97 [3.5]               | 0,21 [0.75]      | –                 | 3,96 [0.156]      | 0,10 to 1,0 [0.004 to 0.040]   | 30,17 ±0,76 [1.188 ±0.03]       |
|   | <b>BZ-2RW82272-A2</b>     | Applications requiring gold alloy contacts                                  | 1 A P                        | 1,67 [6]                 | 0,42 [1.5]       | –                 | 2,39 [0.094]      | 0,08 to 0,51 [0.003 to 0.020]  | 30,17 [1.188]                   |
|                                                                                    | <b>BZ-2RW822725551-A2</b> | Apps requiring gold alloy contacts plus dustproof and splash resistant seal | 1 A P                        | 1,67 [6]                 | 0,42 [1.5]       | –                 | 2,39 [0.094]      | 0,08 to 0,51 [0.003 to 0.020]  | 30,17 [1.188]                   |
|                                                                                    | <b>BZ-2RW822-A2</b>       | 26,7 mm [1.05 in] roller lever                                              | 15 A A                       | 1,67 [6]                 | 0,42 [1.5]       | –                 | 2,39 [0.094]      | 0,08 to 0,51 [0.003 to 0.020]  | 30,17 [1.188]                   |
|                                                                                    | <b>BZ-2RW8222-A2</b>      | Roller turned 90°                                                           | 15 A A                       | 0,7 to 1,81 [2.5 to 6.5] | 0,35 [1.25]      | –                 | 3,58 [0.141] max. | 0,08 to 0,51 [0.003 to 0.020]  | 30,75 [1.25]                    |
|                                                                                    | <b>BZ-2RW82224-A2</b>     | Operating in temperature to 121 °C [250 °F]                                 | 15 A A                       | 1,67 [6]                 | 0,42 [1.5]       | –                 | 2,39 [0.094]      | 0,08 to 0,51 [0.003 to 0.020]  | 30,17 [1.188]                   |
|                                                                                    | <b>BZ-2RW8225551-A2</b>   | Dustproof and splash resistant seal                                         | 15 A A                       | 1,67 [6]                 | 0,42 [1.5]       | –                 | 2,39 [0.094]      | 0,08 to 0,51 [0.003 to 0.020]  | 30,17 [1.188]                   |
|                                                                                    | <b>BZ-2RW82255-A2-S</b>   | Best service for sealed construction; stainless steel internal snap spring. | 15 A A                       | 1,67 [6]                 | 0,42 [1.5]       | –                 | 2,39 [0.094]      | 0,08 to 0,51 [0.003 to 0.020]  | 30,17 [1.188]                   |
|                                                                                    | <b>BA-2RV22-A2</b>        | Up to 20 ampere load                                                        | 20 G                         | 1,67 [6]                 | 0,42 [1.5]       | 6,35 [0.250]      | 0,76 [0.030]      | 1,14 [0.045] max.              | 29,77 [1.172]                   |
|                                                                                    | <b>BM-1RW822-A2</b>       | Up to 22 ampere load                                                        | 22 F                         | 1,67 [6]                 | 0,42 [1.5]       | –                 | 2,39 [0.094]      | 0,025 to 0,33 [0.001 to 0.013] | 30,17 [1.188]                   |
|                                                                                    | <b>BE-2RV22-A4</b>        | Up to 25 ampere load; #8 screw terminals                                    | 25 H                         | 1,67 [6]                 | 0,42 [1.5]       | 6,35 [0.250]      | 0,76 [0.030]      | 1,14 [0.045] max.              | 29,77 [1.172]                   |
|  | <b>BZ-2RW82299-A2</b>     | Adjustable operating point. Roller lever 1.05 inch (26,7 mm)                | 15 A A                       | 1,67 [6]                 | 0,42 [1.5]       | –                 | 1,02 [0.040]      | 0,08 to 0,51 [0.003 to 0.020]  | 29,77 to 30,56 [1.172 to 1.203] |
|                                                                                    | <b>BZ-2RW8299-A2</b>      | Adjustable operating point. Roller lever 1.90 inch (48,3 mm)                | 15 A A                       | 0,97 [3.5]               | 0,21 [0.75]      | –                 | 2,16 [0.085]      | 0,10 to 1,0 [0.004 to 0.040]   | 29,2 to 31,5 [1.150 to 1.24]    |

\*\* Except where stated ±0,38 mm [±0.015 in].

# MICRO SWITCH Premium Large Basic Switches

O.F. • Operating force  
R.F. • Release force  
P.T. • Pretravel  
O.T. • Overtravel  
D.T. • Differential travel  
O.P. • Operating position

## ROLLER LEVER ORDER GUIDE

|                                                                                    | Catalog Listing   | Recommended For                                                                       | Electrical Data and UL Codes | O.F. N [oz]   | R.F. min. N [oz] | P.T. max. mm [in] | O.T. min. mm [in] | D.T. mm [in]                         | O.P.*** mm [in]               |
|------------------------------------------------------------------------------------|-------------------|---------------------------------------------------------------------------------------|------------------------------|---------------|------------------|-------------------|-------------------|--------------------------------------|-------------------------------|
|    | BZ-2RW82725551-A2 | Applications requiring gold alloy contacts, plus dustproof, and splash resistant seal | 1 A<br>P                     | 0,97<br>[3.5] | 0,21<br>[0.75]   | -                 | 3,96<br>[0.156]   | 0,10 to 1,0<br>[0.004 to 0.040]      | 30,17 ±0,76<br>[1.188 ±0.030] |
|                                                                                    | BZ-2RW82-A2       | 1.90 inch (48,3 mm) (steel roller) lever applications                                 | 15 A<br>A                    | 0,97<br>[3.5] | 0,21<br>[0.75]   | -                 | 3,96<br>[0.156]   | 0,10 to 1,0<br>[0.004 to 0.040]      | 30,17 ±0,76<br>[1.188 ±0.030] |
|                                                                                    | BZ-2RW825551-A2   | Dustproof and splash resistant seal                                                   | 15 A<br>A                    | 0,97<br>[3.5] | 0,21<br>[0.75]   | -                 | 3,96<br>[0.156]   | 0,10 to 1,0<br>[0.004 to 0.040]      | 30,17 ±0,76<br>[1.188 ±0.030] |
|                                                                                    | BZ-2RW8224-A2     | Operating in temperature to 121 °C [250 °F]                                           | 15 A<br>A                    | 0,97<br>[3.5] | 0,21<br>[0.75]   | -                 | 3,96<br>[0.156]   | 0,10 to 1,0<br>[0.004 to 0.040]      | 30,17 ±0,76<br>[1.188 ±0.030] |
|                                                                                    | BA-2RV2-A2        | Up to 20 ampere load                                                                  | 20 A<br>G                    | 0,97<br>[3.5] | 0,14<br>[0.5]    | 11,89<br>[0.468]  | 1,52<br>[0.060]   | 2,16<br>[0.085]                      | 30,17 ±0,76<br>[1.188 ±0.030] |
|                                                                                    | BM-1RW82-A2       | Up to 22 ampere load                                                                  | 22 A<br>F                    | 0,97<br>[3.5] | 0,21<br>[0.75]   | -                 | 3,96<br>[0.156]   | 0,08 to 0,56<br>[0.003 to 0.022]     | 30,17 ±0,76<br>[1.188 ±0.030] |
|                                                                                    | BE-2RV2-A4        | Up to 25 ampere load; #8 screw terminals                                              | 25 A<br>H                    | 0,97<br>[3.5] | 0,14<br>[0.5]    | 11,89<br>[0.468]  | 1,52<br>[0.060]   | 2,16<br>[0.085]                      | 30,17 ±0,76<br>[1.188 ±0.030] |
|  | BZ-RW922-A2       | Best repeatability and O.P. stability                                                 | 10 A<br>I                    | 3,34<br>[12]  | 1,11<br>[4]      | 0,35<br>[0.015]   | 2,54<br>[0.100]   | 0,013 to 0,025<br>[0.0005 to 0.0010] | 31,37<br>[1.235]              |
|  | BZ-2RW826-A2      | One-way roller 9,4 mm x 3,8 mm [0.37 in dia. x 0.15 in] wide roller                   | 15 A<br>A                    | 1,67<br>[6]   | 0,42<br>[1.5]    | -                 | 2,39<br>[0.094]   | 0,08 to 0,51<br>[0.003 to 0.020]     | 41,34<br>[1.625]              |
|                                                                                    | BZ-2RW825-A2      | One-way roller 4,83 mm x 4,83 mm [0.19 in dia. x 0.19 in] wide roller                 | 15 A<br>A                    | 2,22<br>[8]   | 0,42<br>[1.5]    | -                 | 1,52<br>[0.060]   | 0,38<br>[0.015]                      | 28,96<br>[1.14]               |

NOTE: For adjustable operate point and simulated roller lever switches, refer to previous page.

\*\* Except where stated ±0,38 mm [±0.015 in].

# MICRO SWITCH Premium Large Basic Switches

O.F. • Operating force  
R.F. • Release force  
P.T. • Pretravel  
O.T. • Overtravel  
D.T. • Differential travel  
O.P. • Operating position

## FLEXIBLE LEAF AND FLEXIBLE ROLLER LEAF ORDER GUIDE

|                                                                                     | Catalog Listing          | Recommended For                                      | Electrical Data and UL Codes | O.F. N [oz]              | R.F. min. N [oz] | P.T. max. mm [in] | O.T. min. mm [in]             | D.T. mm [in] | O.P.*** mm [in]                |
|-------------------------------------------------------------------------------------|--------------------------|------------------------------------------------------|------------------------------|--------------------------|------------------|-------------------|-------------------------------|--------------|--------------------------------|
|     | BZ-2RL-A2                | Force and stability of the flexible leaf actuator    | 15 A A                       | 1,39 [5]                 | 0,14 [0.5]       | -                 | 1,52 [0.060]                  | 1,27 [0.050] | 17,48 [0.688]                  |
|                                                                                     | BZ-2RL5551-A2            | Dustproof and splash resistant seal                  | 15 A A                       | 1,95 [7]                 | 0,14 [0.5]       | -                 | 1,52 [0.060]                  | 1,27 [0.050] | 17,48 [0.688]                  |
|                                                                                     | BZ-2RLT04 (M8805/1-001)  | MIL-PRF-8805 application requirements                | 15 A A                       | 1,39 [5]                 | 0,14 [0.5]       | -                 | 1,52 [0.060]                  | 1,27 [0.050] | 17,48 [0.688]                  |
|                                                                                     | BZ-2RL24-A2              | Operating in temperature to 121 °C [250 °F]          | 15 A A                       | 1,39 [5]                 | 0,14 [0.5]       | -                 | 1,52 [0.060]                  | 1,27 [0.050] | 17,48 [0.688]                  |
|                                                                                     | BZ-RLX                   | Manual reset; solder terminals                       | 15 A E                       | 0,83 [3]                 | -                | -                 | 1,57 [0.062]<br>0,38* [0.015] | -            | 17,48 [0.688]<br>7,14* [0.281] |
|                                                                                     | BA-2RL-A2                | Up to 20 ampere load                                 | 20 A G                       | 2,5 [9]                  | 0,28 [1]         | -                 | 1,57 [0.062]                  | 1,57 [0.062] | 17,48 [0.688]                  |
|                                                                                     | BE-2RL-A4                | Up to 25 ampere load, #8 screw terminals             | 25 A H                       | 2,5 [9]                  | 0,28 [1]         | -                 | 1,57 [0.062]                  | 1,57 [0.062] | 17,48 [0.688]                  |
|  | BZ-RL24-A2               | Operating in temp. to 121 °C [250 °F] for 100 hours  | 5 A B                        | 1,39 [5]                 | 0,14 [0.5]       | -                 | 1,52 [0.060]                  | 1,27 [0.050] | 28,6 [1.125]                   |
|                                                                                     | BZ-2RL2-A2               | Force and stability of the flexible leaf with roller | 15 A A                       | 1,39 [5]                 | 0,14 [0.5]       | -                 | 1,52 [0.060]                  | 1,27 [0.050] | 28,6 [1.125]                   |
|                                                                                     | BZ-2RL25551-A2           | Dustproof and splash resistant seal                  | 15 A A                       | 1,95 [7]                 | 0,14 [0.5]       | -                 | 1,52 [0.060]                  | 1,27 [0.050] | 28,6 [1.125]                   |
|                                                                                     | BZ-2RL2T04 (M8805/1-036) | MIL-PRF-8805 application requirements                | 15 A A                       | 1,04 to 1,39 [3.75 to 5] | 0,14 [0.5]       | -                 | 1,52 [0.060]                  | 1,27 [0.050] | 28,6 [1.125]                   |
|                                                                                     | BA-2RL2-A2               | Up to 20 ampere load                                 | 20 A G                       | 2,5 [9]                  | 0,28 [1]         | -                 | 1,52 [0.060]                  | 1,65 [0.065] | 28,6 [1.125]                   |
|                                                                                     | BE-2RL2-A4               | Up to 25 ampere load, #8 screw terminals             | 25 A H                       | 2,5 [9]                  | 0,28 [1]         | -                 | 1,52 [0.060]                  | 1,65 [0.065] | 28,6 [1.125]                   |

NOTE: For adjustable operate point and simulated roller lever switches, refer to previous page.

\*\* Except where stated  $\pm 0,76$  mm [ $\pm 0.030$  in].

# MICRO SWITCH Premium Large Basic Switches


## STANDARD ACTUATOR OPTIONS, TERMINALS, & DIMENSIONS

|                                                              |                                                              |
|--------------------------------------------------------------|--------------------------------------------------------------|
| <p><b>BZ/BM Series: Pin plunger</b></p>                      | <p><b>BA/BE Series: Pin plunger</b></p>                      |
| <p><b>BZ/BM Series: Overtravel plunger</b></p>               | <p><b>BA/BE Series: Overtravel plunger</b></p>               |
| <p><b>BZ/BM Series: Bushing-mount overtravel plunger</b></p> | <p><b>BA/BE Series: Bushing-mount overtravel plunger</b></p> |

NOTE: Typical switch width is 17,5 mm [0.69 in]

# MICRO SWITCH Premium Large Basic Switches

## STANDARD ACTUATOR OPTIONS, TERMINALS, & DIMENSIONS

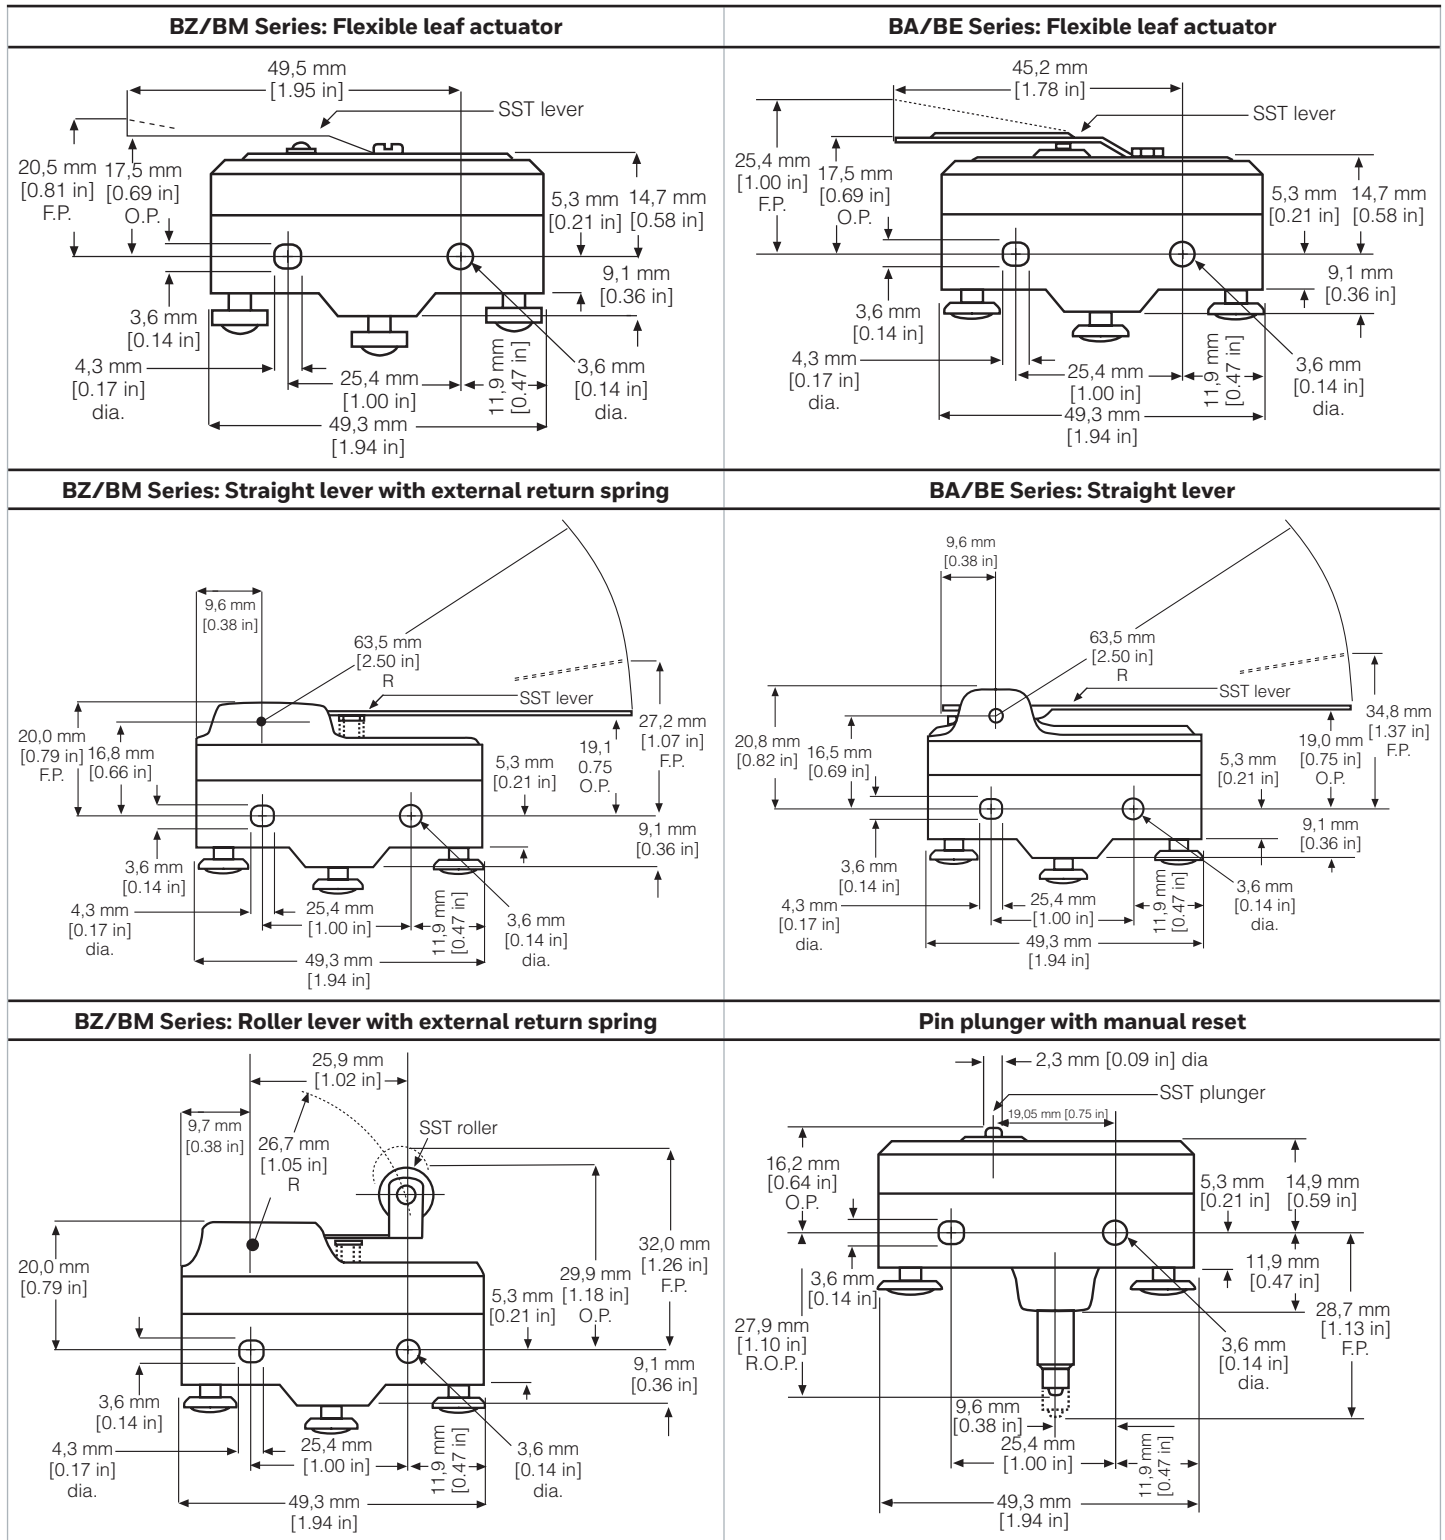

NOTE: Typical switch width is 17,5 mm [0.69 in]

## MICRO SWITCH Premium Large Basic Switches

### 6AS SERIES - PREMIUM LARGE SNAP-ACTION TANDEM SWITCH ASSEMBLY



The MICRO SWITCH 6AS Series consists of two large premium BZ/BA/BM/BE snap-action switches ganged together and actuated by a single actuator. Operating characteristics are dependent upon the type of individual switches and actuators chosen. Field adjustable operating point on one or both basic switches. Solder, A2, and T-type terminations available, along with straight, roller, and leaf levers. Mounting holes accept pins or screws of 3,53 mm [0.139 in] diameter. Often used for boiler controls or anywhere two circuits need to be controlled by one actuator.

O.F. • Operating force  
R.F. • Release force  
O.T. • Overtravel  
D.T. • Differential travel  
O.P. • Operating position

### 6AS SERIES ORDER GUIDE

|                                                                                    | Catalog Listing | Recommended For                                                              | Electrical Data and UL Codes | Lever length        | Terminal type                                   | O.F. N [oz] | R.F. min. N [oz] | O.T. min. mm [in]             | D.T. mm [in] | O.P.* mm [in]              |
|------------------------------------------------------------------------------------|-----------------|------------------------------------------------------------------------------|------------------------------|---------------------|-------------------------------------------------|-------------|------------------|-------------------------------|--------------|----------------------------|
|   | 6AS34           | Centered lever. Adjustment over switch D                                     | 15 A A                       | 30,56 mm [1.203 in] | A2                                              | 2,22 [8]    | 0,14 [0.5]       | 0,51 [0.020]                  | 2,77 [0.109] | 29,77 [1.172]              |
|                                                                                    | 6AS36           | Lever over switch C. Adjustment over switch D                                | 15 A A                       | 30,56 mm [1.203 in] | A2                                              | 2,22 [8]    | 0,14 [0.5]       | 0,51 [0.020]                  | 2,77 [0.109] | 29,77 [1.172]              |
|                                                                                    | 6AS16           | Centered lever. Adjustment over switch D                                     | 20 A G                       | 30,56 mm [1.203 in] | A2                                              | 3,89 [14]   | 1,11 [4]         | 1,02 [0.040]                  | 3,96 [0.156] | 30,96 ±1,14 [1.219 ±0.045] |
|                                                                                    | 6AS201          | Lever over switch C. No adjustment. Sealed construction                      | 15 A A                       | 26,67 mm [1.05 in]  | A2 and D6 6,35 mm x 0,81 mm [0.25 in x 0.32 in] | 4,2 [15]    | 0,42 [1.5]       | 2,4 [0.094]                   | 1,3 [0.050]  | 30,2 [1.188]               |
|  | 6AS5            | Centered leaf. No adjustment. Switches operate within 0.030 in of each other | 15 A A                       | 38,38 [1.51]        | A2                                              | -           | -                | 0,76 to 1,52 [0.030 to 0.060] | -            | -                          |
|                                                                                    | 6AS28           | Centered lever. Adjustment over switch C                                     | 20 A G                       | 32,26 [1.27]        | A2                                              | 3,89 [14]   | 1,11 [4]         | 1,02 [0.040]                  | -            | 18,67 [0.735]              |

\* Except where stated ±0,76 mm [±0.030 in].


# MICRO SWITCH Premium Large Basic Switches

## STANDARD ACTUATOR OPTIONS, TERMINALS, & DIMENSIONS

| 6AS Series: Straight Lever | 6AS Series: Leaf actuator |
|----------------------------|---------------------------|
|                            |                           |
| 6AS Series: Roller Lever   |                           |
|                            |                           |

## MICRO SWITCH Premium Large Basic Switches

### OPERATING CHARACTERISTICS

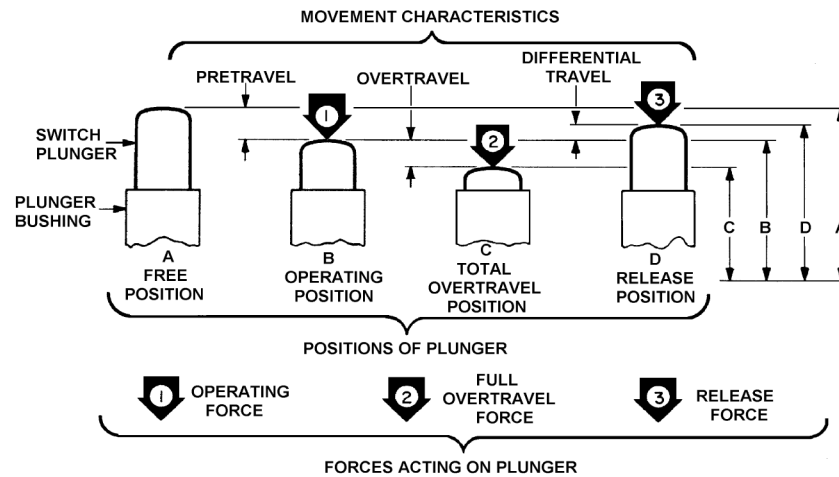


**Table 3. Operating Characteristic Definitions**


| Characteristic                | Description                                                                                                                                                                                                                                                                                                       |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Differential Travel-DT</b> | Plunger or actuator travel from point where contacts “snap-over” to point where they “snap-back.”                                                                                                                                                                                                                 |
| <b>Free Position-FP</b>       | Position of switch plunger or actuator when no external force is applied.                                                                                                                                                                                                                                         |
| <b>Full Overtravel Force</b>  | Force required to attain full overtravel of actuator.                                                                                                                                                                                                                                                             |
| <b>Operating Position-OP</b>  | Position of switch plunger or actuator at which point contacts snap from normal to operated position. With flexible or adjustable actuators, the operating position is measured from the end of the lever or its maximum length. Location of operating position measurement shown on mounting dimension drawings. |
| <b>Operating Force-OF</b>     | Amount of force applied to switch plunger or actuator to cause the contact “snap-over.” Note in the case of adjustable actuators, the force is measured from the maximum length position of the lever.                                                                                                            |
| <b>Overtravel-OT</b>          | Plunger or actuator travel safely available beyond operating position.                                                                                                                                                                                                                                            |
| <b>Pretravel-PT</b>           | Distance or angle traveled in moving plunger or actuator from free position to operating position.                                                                                                                                                                                                                |
| <b>Release Force-RF</b>       | Amount of force still applied to switch plunger or actuator at the moment contacts snap from operated position to non-operated position.                                                                                                                                                                          |
| <b>Total Travel</b>           | Distance from actuator free position to overtravel limit position.                                                                                                                                                                                                                                                |

# MICRO SWITCH Premium Large Basic Switches

## AVAILABLE TERMINALS




**Solder (No suffix)**  
Use up to #14 wire




**A2**  
Bottom facing 6-32 NC x .218" screw with cup washers


**A4**  
(Same as A2 except #8 screws)




**T**  
Bottom facing 6-32 NC x .218" screw with Sems lockwashers




**D5**  
.250" (6,35 mm) wide x .030" (7,62) thick quick-connect



**D6**  
.250" (6,35 mm) wide x .032" (0,81 mm) thick quick-connect




**P4**  
Side facing 8-32 x .218" screw with cup washers




**PC2**  
Self lifting pressure plate terminals and plastic barriers for added dielectric protection

## ACTUATORS


BA, BE, BM, and BZ standard snap-action switches use the actuators described:




Pin plunger; in-line motion




Overtravel plunger; in-line applications requiring additional overtravel




Added overtravel in a panel-mount roller plunger; actuation by cam




Leaf; low-force moving cams or slides




Roller lever; very low-force, fast moving cams



Roller leaf; low-force, large movement actuation



Lever; very low-force, slow cams and slides



Added overtravel in a panel-mount plunger; heavy-duty, in-line applications or slow cams.  
Cam rise should not exceed 30°

# MICRO SWITCH Premium Large Basic Switches

## LARGE PREMIUM SWITCH SERIES NOMENCLATURE TREE (NOT ALL CONFIGURATIONS AVAILABLE)

| Type & Contact                                                                                                                                    | Switch type                                                                    | Break distance<br>(nominal)                         | Construction                                            | Integral actuator                                       | Misc. Variations<br>(Numbers or Letters)                                       | Terminal type                                                                  | Snap spring mat'l<br>(variation)        |
|---------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|-----------------------------------------------------|---------------------------------------------------------|---------------------------------------------------------|--------------------------------------------------------------------------------|--------------------------------------------------------------------------------|-----------------------------------------|
| <b>B Series</b><br><b>Premium Basics</b><br><b>SPDT</b><br>substitute<br>for SMC circuitry<br><b>V Series</b><br>substitute<br>for SPNO circuitry | <b>Z</b> 15 A capacity**;<br>pin plunger 23.3<br>[0.917] from<br>mounting hole | <b>1</b> 0.25 mm [0.01 in]                          | <b>R</b> Moving contact<br>rivet construction           | <b>B</b> Low overtravel<br>plunger, Type A & E          | <b>0</b> Before other number=<br>military construction                         | <b>A2</b> Bottom facing #6<br>screws & cupwashers                              | <b>S</b> Stainless steel<br>snap spring |
|                                                                                                                                                   | <b>A</b> 20 A capacity**;<br>pin plunger 19.0<br>[0.750] from<br>mounting hole | <b>2</b> 0.50 mm [0.02 in]                          | <b>A</b> Shorting bar circuitry<br>Type Z switches only | <b>D</b> Low overtravel<br>plunger, Type Z              | <b>1</b> Threaded bushing,<br>panel mount Q-plunger                            | <b>A4</b> Bottom facing #8<br>screws & cupwashers                              |                                         |
|                                                                                                                                                   | <b>M</b> 22 A capacity;<br>pin plunger 23.3<br>[0.917] from<br>mounting hole   | <b>3</b> 0.91 mm [0.036 in]                         | <b>S</b> Shorting bar circuitry<br>Type A switches only | <b>DS</b> Sealed low overtravel<br>plunger, Type Z only | <b>2</b> Variation of design                                                   | <b>A22</b> A2 type without<br>screws & cupwashers                              |                                         |
|                                                                                                                                                   | <b>E</b> 25 A capacity;<br>pin plunger 19.0<br>[0.750] from<br>mounting hole   | <b>4</b> 1.14 mm [0.045 in]<br>(MT-4R only)         | <b>G</b> Make-before-break<br>switches                  | <b>L</b> Leaf actuator<br>Type A & Z only               | <b>4</b> On W-lever, light<br>force var. (no spring)                           | <b>A41</b> A4 type without<br>screws & cupwashers                              |                                         |
|                                                                                                                                                   |                                                                                | <b>5</b> 1.27 mm [0.050 in]<br>Type A switches only | <b>Y</b> Split contact switches<br>Type Z switches only | <b>N</b> High overtravel<br>plunger/sealed boot         | <b>5</b> Used with other 5s;<br>denotes sealed cons.                           | <b>A46</b> A4 type #8 screws<br>and lock washers                               |                                         |
|                                                                                                                                                   |                                                                                | <b>7</b> 1.78 mm [0.07 in]<br>Type Z switches only  |                                                         | <b>Q</b> High overtravel<br>plunger, Type A & Z         | <b>6/7</b> On Q plunger, replac.<br>for die-cast switches                      | <b>D1</b> 89° QC used with<br>flat base w/o slots                              |                                         |
|                                                                                                                                                   |                                                                                | <b>-</b> 0.15 mm [0.006 in]                         |                                                         | <b>S</b> Medium overtravel<br>plunger, Type Z only      | <b>7</b> Variation of design,<br>other than Q plungers                         | <b>D5</b> 90° QC used with<br>flat base                                        |                                         |
|                                                                                                                                                   |                                                                                |                                                     |                                                         | <b>V</b> Rigid lever<br>Type A & E only                 | <b>8</b> With W-levers, rigid<br>type lever (ex. W80)                          | <b>D6</b> 90° QC used with<br>A2 (step) base                                   |                                         |
|                                                                                                                                                   |                                                                                |                                                     |                                                         | <b>W</b> Rigid or resilient<br>lever, Type Z only       | <b>8</b> With Q-plunger, roller<br>plunger inline to axis                      | <b>P1</b> (left) side facing #8<br>screw w/ cupwasher<br>solder lug base       |                                         |
|                                                                                                                                                   |                                                                                |                                                     |                                                         | <b>M</b> Reverse actuating<br>lever                     | <b>9</b> With L-leaf actuators,<br>flat leaf                                   | <b>P2</b> Same as P1, except<br>facing right                                   |                                         |
|                                                                                                                                                   |                                                                                |                                                     |                                                         | <b>QW</b> Omnidirectional<br>"wobble" lever             | <b>72</b> Gold contacts                                                        | <b>P4</b> (left) side facing #8<br>screw w/ cupwasher<br>integral construction |                                         |
|                                                                                                                                                   |                                                                                |                                                     |                                                         | <b>-</b> Standard pin plunger                           | <b>9</b> On Q-plunger, detach.<br>roller, turned 90°                           | <b>P5</b> Same as P4, except<br>facing right                                   |                                         |
|                                                                                                                                                   |                                                                                |                                                     |                                                         |                                                         | <b>22</b> Short roller lever,<br>V- or W-lever                                 | <b>T</b> Bottom facing #6<br>screws/lockwashers                                |                                         |
|                                                                                                                                                   |                                                                                |                                                     |                                                         |                                                         | <b>24</b> Heat resistant<br>construction 121 °C                                | <b>-</b> Solder lug or no<br>terminal hardware                                 |                                         |
|                                                                                                                                                   |                                                                                |                                                     |                                                         |                                                         | <b>55</b> Heavy-duty seal cons.<br>Stain steel snap spring,<br>Special inserts |                                                                                |                                         |
|                                                                                                                                                   |                                                                                |                                                     |                                                         |                                                         | <b>81</b> On Q-plunger, roller<br>90° to major axis                            |                                                                                |                                         |
|                                                                                                                                                   |                                                                                |                                                     |                                                         |                                                         | <b>82</b> Long W-lever,<br>with roller                                         |                                                                                |                                         |
|                                                                                                                                                   |                                                                                |                                                     |                                                         |                                                         | <b>99</b> On W-lever, adj.<br>O.P. (usually w/ 8)                              |                                                                                |                                         |
|                                                                                                                                                   |                                                                                |                                                     |                                                         |                                                         | <b>244</b> High temp. constr.<br>Diff snap spring<br>Lower elect. rating       |                                                                                |                                         |
|                                                                                                                                                   |                                                                                |                                                     |                                                         |                                                         | <b>5551</b> General use<br>sealed construction                                 |                                                                                |                                         |
|                                                                                                                                                   |                                                                                |                                                     |                                                         |                                                         | <b>822</b> Short W-lever<br>with roller                                        |                                                                                |                                         |
|                                                                                                                                                   |                                                                                |                                                     |                                                         |                                                         | <b>X</b> Maintained manual<br>reset                                            |                                                                                |                                         |

NOTES:

\* Break distance between separated contacts (nominal values)

\*\* Some versions have lower electrical ratings


## MICRO SWITCH Premium Large Basic Switches

### LARGE SNAP-ACTION SWITCH ACCESSORIES

#### Brackets

| Description             | 8MA1                                                                                                               | 8MA2                                                                               | 17MA1-B                                                                                                                      |
|-------------------------|--------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|
|                         |                                   |  |                                           |
| <b>Description</b>      | Adjustable mounting bracket with adjustment slot on left                                                           | Adjustable mounting bracket with adjustment slot on right                          | Conversion mounting bracket                                                                                                  |
| <b>Housing material</b> | Steel                                                                                                              | Steel                                                                              | Corrosion-resistant metal                                                                                                    |
| <b>Measurements</b>     | 60,2 mm W x 21,3 mm H x 7,4 mm D [2.37 in W x 0.84 in H x 0.29 in D]                                               |                                                                                    | 66,8 mm W x 19,0 mm D [2.63 in W x 0.75 in D]                                                                                |
| <b>Features</b>         | Sturdy plated steel construction; fast, easy screwdriver adjustment; can be used with most standard basic switches |                                                                                    | Converts standard basic switches from side to top mount; corrosion resistant; snaps into switch mounting holes without tools |

#### Die-cast Zinc Enclosures


| Description             | 3PA1                                                                                                                                 | 3PA28                                                                                                                               | 3PA2                                                                                                                                                                           |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                         |                                                    |                                                  |                                                                                            |
| <b>Description</b>      | Mounted from either side through 3,55 mm [0.140 in] dia. holes on 25,4 mm [1.0 in] centers; conduit/hub 0.5 – 14 NPT internal thread | Mounted from either side through 3,55 mm [0.140 in] dia. holes on 25,4 mm [1.0 in] centers. 1/2-14 NPSM internal thread conduit hub | Switch secured in enclosure; two 4,37 mm [0.172 in] dia. holes in flange accept #8 screws for mounting on 41,3 mm [1.625 in] centers; conduit/hub 0.5 – 14 NPT internal thread |
| <b>Housing material</b> | Die-cast zinc enclosure (side mount)                                                                                                 | Die-cast zinc enclosure (side mount)                                                                                                | Die-cast zinc enclosure (flange mount)                                                                                                                                         |
| <b>Measurements</b>     | 74,8 mm W x 42,9 mm H x 25,4 mm D [2.95 in W x 1.69 in H x 1.00 in D]                                                                | 74,8 mm W x 42,9 mm H x 25,4 mm D [2.95 in W x 1.69 in H x 1.00 in D]                                                               | 74,8 mm W x 42,9 mm H x 25,4 mm D [2.95 in W x 1.69 in H x 1.00 in D]                                                                                                          |
| <b>Sealing/Features</b> | NEMA 1; IP 40; protects the switch from physical abuse and personnel from contact with exposed terminals                             |                                                                                                                                     |                                                                                                                                                                                |

#### Plastic Thermal Enclosures

| Description             | 5PA1                                                                                                                  | 5PA2                                                                                 | 5PA3                                                                                                             |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
|                         |                                    |  |                             |
| <b>Description</b>      | Plastic terminal enclosure used with solder terminal switches                                                         | Plastic terminal enclosure use with screw terminal switches                          | Plastic terminal enclosure used with either solder or screw terminal switches with auxiliary actuators assembled |
| <b>Housing material</b> | plastic                                                                                                               | plastic                                                                              | plastic                                                                                                          |
| <b>Measurements</b>     | 52,8 mm W x 16,1 mm H [2.08 in W x 0.64 in H]                                                                         | 52,8 mm W x 20,2 mm H x 21,0 mm D [2.08 in W x 0.80 in H x 0.83 in D]                | 52,8 mm W x 20,2 mm H x 21,0 mm D [2.08 in W x 0.80 in H x 0.83 in D]                                            |
| <b>Sealing/Features</b> | NEMA 1, IP 40; easy to use; screw and solder terminal versions; protect personnel from contact with exposed terminals |                                                                                      |                                                                                                                  |

## MICRO SWITCH Premium Large Basic Switches

### AUXILIARY ACTUATOR ORDER GUIDE

|                                                                                     | Catalog Listing             | Description                                                                                                      | Use only with | Overtravel min. mm [in]    | Operating Position* mm [in]                      | Free Position mm [in]                   |
|-------------------------------------------------------------------------------------|-----------------------------|------------------------------------------------------------------------------------------------------------------|---------------|----------------------------|--------------------------------------------------|-----------------------------------------|
|    | JR                          | Roller lever for "S" plunger type BZ switches only. Permits cam operation                                        | BZ            | 11,1 mm [0.437 in]         | 44,45 mm $\pm$ 3,18 mm [1.75 in $\pm$ 0.125 in]  | –                                       |
|    | AD5721R (M8805/59) AN3169-1 | Adjustable roller lever. Tang on top of actuator can be bent to adjust O.P. and F.P.                             | BZ, BM        | 11,1 mm [0.437 in] approx. | 31,75 mm to 41,15 mm [1.25 in to 1.62 in]        | 39,6 mm to 43,7 mm [1.56 in to 1.72 in] |
|                                                                                     | ADA3721R                    |                                                                                                                  | BA, BE        | 9,53 mm [0.375 in] approx. | 40,48 mm [1.594 in] approx.                      | 46,03 mm [1.812 in]                     |
|    | MC2711 (M8805/59) AN3168-2  | Straight plunger. Panel mount                                                                                    | BZ, BM        | 4,78 mm [0.188 in]         | 27,79 mm [1.094 in]                              | 29,4 mm [1.156 in]                      |
|                                                                                     | MCA2711                     |                                                                                                                  | BA, BE        | 3,96 mm [0.156 in]         | 28,17 mm [1.109 in]                              | 30,18 mm [1.188 in]                     |
|   | MC2711H                     | Sealed straight plunger. Panel mount. Elastomer boot seal resists liquid splash and dirt. Furnished unassembled. | BZ, BM        | 4,78 mm [0.188 in]         | 28,98 mm [1.141 in]                              | 29,4 mm [1.156 in]                      |
|                                                                                     | MCA2711H                    |                                                                                                                  | BA, BE        | 4,37 mm [0.172 in]         | 27,38 mm $\pm$ 0,76 mm [1.078 in $\pm$ 0.030 in] | 29,56 mm [1.156 in]                     |
|  | MD3211Q                     | Roller plunger. Panel mount. Roller parallel to long axis of the switch                                          | BZ, BM        | 3,18 mm [0.125 in] approx. | 35,7 mm [1.406 in]                               | 37,69 mm [1.484 in]                     |
|                                                                                     | MDA3711Q                    |                                                                                                                  | BA, BE        | 3,18 mm [0.125 in]         | 36,12 mm [1.422 in]                              | 37,69 mm [1.484 in]                     |
|  | MD3211Q1                    | Cross roller plunger. Panel mount. Roller perpendicular to long axis of the switch                               | BZ, BM        | 3,18 mm [0.125 in] approx. | 35,7 mm [1.406 in]                               | 37,69 mm [1.484 in]                     |
|                                                                                     | MDA3711Q1                   |                                                                                                                  | BA, BE        | 3,18 mm [0.125 in]         | 36,12 mm [1.422 in]                              | 37,69 mm [1.484 in]                     |
|  | MC7711 (M8805/58) AN3167-1  | High overtravel plunger. Panel mount                                                                             | BZ, BM        | 20,62 mm [0.812 in]        | 69,1 mm [2.719 in]                               | 70,64 mm [2.781 in]                     |
|                                                                                     | MCA7711                     |                                                                                                                  | BA, BE        | 19,84 mm [0.781 in]        | 69,44 mm [2.734 in]                              | 71,42 mm [2.812 in]                     |

\* Except where stated  $\pm$ 1,14 mm [ $\pm$ 0.045 in].

NOTE: All actuators are for use with pin plunger types only, except catalog listing JR.

## ADDITIONAL MATERIALS

The following associated literature is available on the Honeywell web site at [sensing.honeywell.com](http://sensing.honeywell.com):

- Product installation instructions
- Product application-specific information
  - Sensors and switches for potential HVAC/R applications
  - Sensors and switches for valves and flowmeters
  - Sensors and switches in oil rig applications
- Case study
  - A good range of mobility - BZ Series
- BZ/BA performance information
- Applying basic switches
- Low energy switching guide
- Product range guide

### **WARNING** **PERSONAL INJURY**

DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

**Failure to comply with these instructions could result in death or serious injury.**

### **WARNING** **MISUSE OF DOCUMENTATION**

- The information presented in this product sheet is for reference only. Do not use this document as a product installation guide.
- Complete installation, operation, and maintenance information is provided in the instructions supplied with each product.

**Failure to comply with these instructions could result in death or serious injury.**

## Warranty/Remedy

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship during the applicable warranty period. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items that Honeywell, in its sole discretion, finds defective. **The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While Honeywell may provide application assistance personally, through our literature and the Honeywell web site, it is buyer's sole responsibility to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this writing. However, Honeywell assumes no responsibility for its use.

## For more information

Honeywell Sensing and Internet of Things services its customers through a worldwide network of sales offices and distributors. For application assistance, current specifications, pricing or the nearest Authorized Distributor, visit [sensing.honeywell.com](http://sensing.honeywell.com) or call:

|              |                 |
|--------------|-----------------|
| Asia Pacific | +65 6355-2828   |
| Europe       | +44 1698 481481 |
| USA/Canada   | +1-800-537-6945 |

## Honeywell Sensing and Internet of Things

9680 Old Bailes Road  
Fort Mill, SC 29707  
[www.honeywell.com](http://www.honeywell.com)

005944-6-EN | 6 | 02/19  
© 2019 Honeywell International Inc. All rights reserved.

**Honeywell**



# SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS


At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.

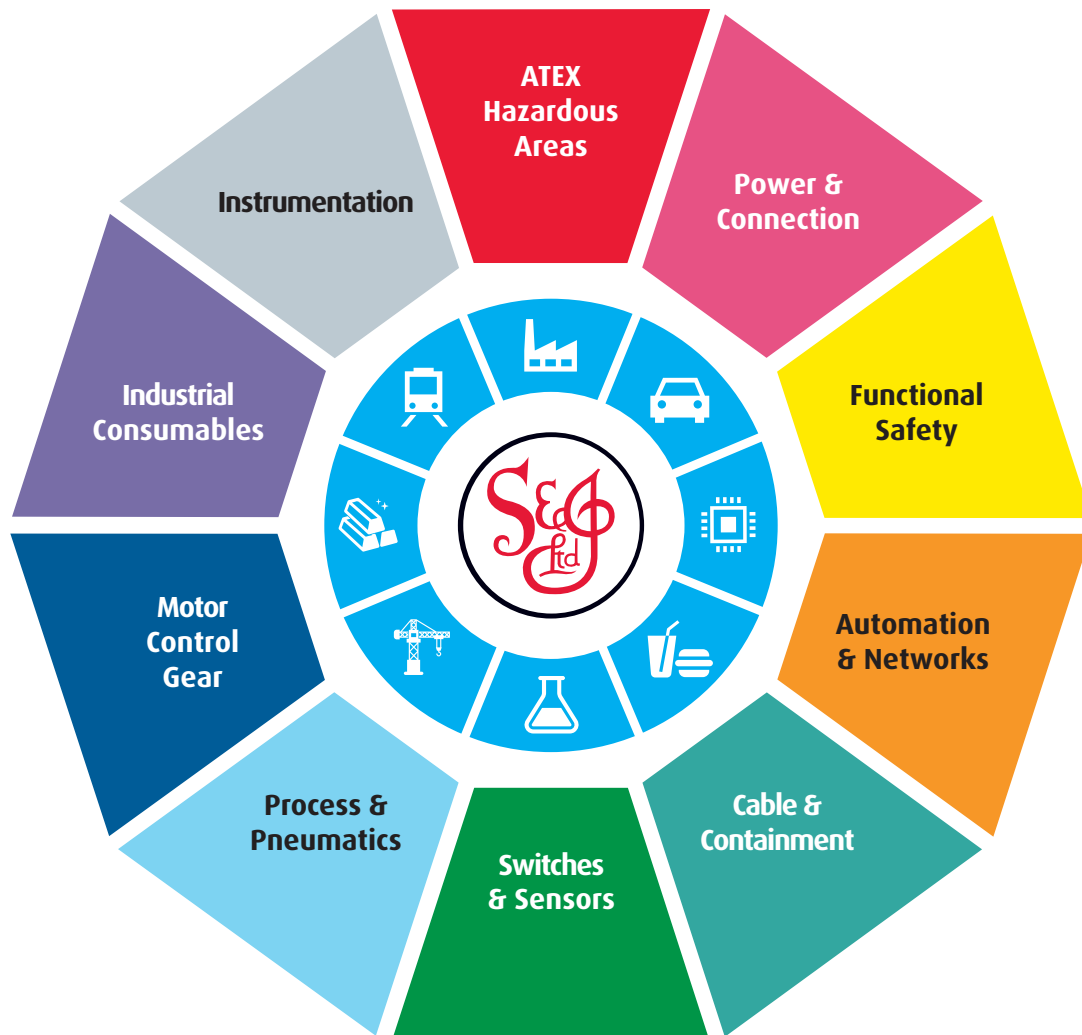

Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

# [www.scatts.co.uk](http://www.scatts.co.uk)