


# General Purpose ELS -1100 Series Satisfies Most Applications

These polysulfone units are both compact and economical. They feature a variety of mountings, power requirements and electrical terminations to make it easy to find a perfect match for your application.

## Specifications

<b>Materials</b>	
<b>Housing and Prism</b>	Polysulfone or Nylon
<b>Operating Pressure</b>	0 to 150 PSI, Maximum
<b>Operating Temperature*</b>	0°F to 176°F (-17.8°C +80°C)
<b>Current Consumption</b>	18 mA, Approximately
<b>Output†</b>	TTL/CMOS Compatible. Open Collector Output May Sink 40 mA UP TO 30 VDC.
<b>Repeatability</b>	±1 mm
<b>EMI Susceptibility</b>	Meets (MIL-STD-461B Part 2 Modified) Specification of 10 V/M for Frequency Range 30 to 1000 MHz (Except 609 MHz = 9 V/M and 679 MHz = 7.5 V/M).

\* These switches are not for use in freezing liquid or steam/high condensation environments. Contact Gems for alternative solutions.

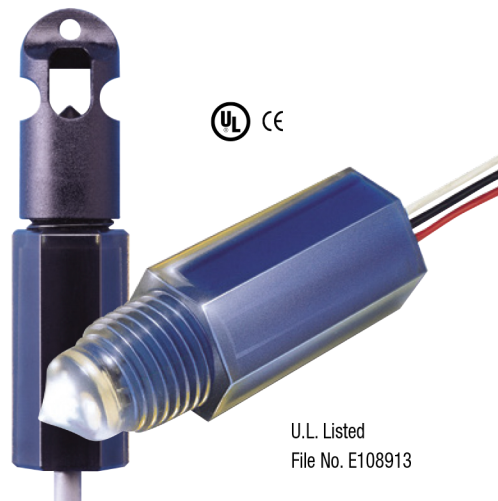

LEVEL SWITCHES - SINGLE POINT

## Dimensions

	1/4" NPT Mounting	1/4" NPT Mounting with 3/8" Conduit	1/2" Straight Thread Mounting with O-Ring	M12x1-8g Straight Thread with O-Ring	"Fish" Pull Ring
<b>Electrical Termination</b>	Lead Wires, 22 AWG, PVC Jacketed, 12" to 14" Extended				25' Cable, 22 AWG, PVC Jacketed

## How To Order

Specify Part Number based on Mounting Type, Input Power and Output Condition required.

Input Power	Probe Condition at Current Sink	Mounting Type					
		1/4" NPT	1/4" NPT & 3/8" Conduit		1/2" Straight Thread	M12x1-8g Straight Thread	"Fish" Pull Ring
		Polysulfone	Polysulfone	Nylon	Polysulfone	Polysulfone	Polysulfone
5 VDC	Wet	138167	144225	175631	144235	166541	—
10-28 VDC	Wet	142700 ⚡	143585 ⚡	157750	143580	169555 ⚡	143577
	Dry	143570 ⚡	143590 ⚡	175632	143575	169556	148973 ⚡

⚡ - Stock Items.

## Intrinsically-Safe Versions

GEMS ELS-1100 Switches may be rendered intrinsically-safe for Class I, Division 1, Group C & D when used with appropriate GEMS Zener Barriers. Call Gems Sensors for special ELS-1100-IS (intrinsically-safe) part numbers and Installation Bulletins 148745 and 148744, File No. E44570.

## Extended Power and Switching Capabilities of 12 VDC Models with Gems.

Converts TTL output signal to 5 Amp relay output. Available as open circuit board or mounted in a NEMA 4X enclosure (pictured). See Page A-33.





# SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

# [www.scatts.co.uk](http://www.scatts.co.uk)