



## Turbine Flow Rate Sensor FT-110 Series—TurboFlow

### Operating and Installation Instructions

**Prior to installation**, confirm system versus sensor specifications and media compatibility of sensor. The system needs to be filtered to 50 microns prior to the sensor, and pulses/water hammer effects should be minimized to prevent unit damage. Observe arrow on bottom of unit for correct inlet and outlet port. Sensor can be mounted in any horizontal, vertical, or skewed orientation. Correctly installed, the sensor works maintenance-free.

#### Installation

##### 3/8" NPT Units:

Apply a sparse amount of thread sealant (*Permatex "No More Leaks"®*) or Teflon® tape to male threads. Insure that sealant does not enter into the turbine and bearing internal area. Hand-tighten unit in place. Turn an additional 1/4 turn to provide seal. If seal leaks, turn an additional 1/4 turn until leak stops. ***Do not exceed one additional turn total.***

##### G 3/8 Units:

G 3/8 units mate with a flat face seal washer (90 shore EPDM, 0, 5 mm ID, 14, 5 mm OD, 2, 0 mm thick)

similar to a garden hose arrangement. This arrangement requires no sealants; hand-tightening should be sufficient for sealing.


#### Specifications

<b>Wetted Parts</b>	<b>Body:</b> Nylon 12 <b>Turbine:</b> Nylon 12 Composite <b>Bearings:</b> PTFE/15% Graphite
<b>Operating Pressure</b>	200 psi
<b>Burst Pressure</b>	2500 psi
<b>Operating Temperature</b>	-4° to 212°F (-20° to 100°C)
<b>Viscosity</b>	32 to 81 SSU (.8—16 Centistokes)
<b>Filter</b>	< 50 Microns
<b>Input Power</b>	5-24 VDC @ 8 mA
<b>Output</b>	NPN Sinking Open Collector @ 20 mA, Max.
<b>Accuracy</b>	± 3% of Rdg. Normal Range
<b>Repeatability</b>	0.5% FS Normal Range
<b>Electrical Connection</b>	Spade Terminals .110/.248 X .031" (2.8/6.3 X .8mm, 1 meter cable or DIN connector)


## Electrical/Output Signal (□□):

The output signal is a square wave signal, whose frequency varies linearly with flow rate. An example pull-up resistor (user supplied) is required to insure that the open collector will sink less than 50 mA.

### Wiring Diagrams:

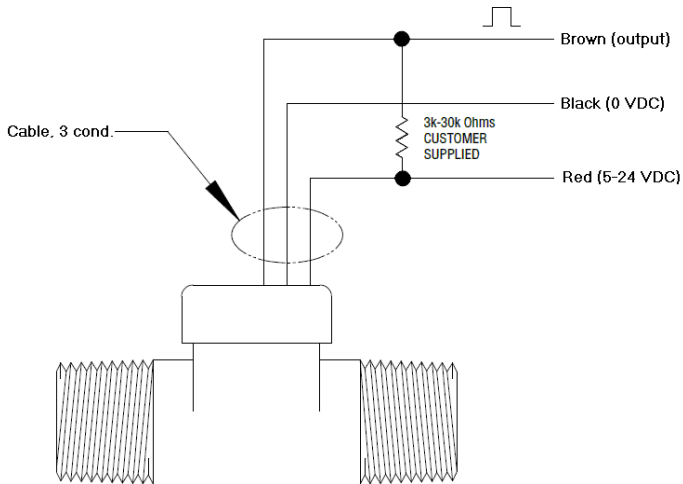

Cable Output

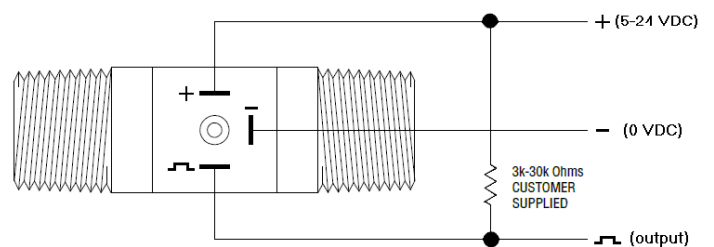

DIN Output

The product is designed and manufactured in accordance with Sound Engineering Practice as defined by the Pressure Equipment Directive 97/23/EC. This product must not be used as a "safety accessory" as defined by the Pressure Equipment Directive, Article 1, Paragraph 2.1.3. The presence of a CE Mark on the unit does not relate to the Pressure Equipment Directive.

### ***Important Points:***

- Gems products must be maintained and installed in strict accordance with the National Electrical Code and the applicable Gems product instruction Bulletin that covers installation, operation, and proper maintenance. Failure to observe this information may result in serious injury or damages.
- Please adhere to the pressure and temperature limitations shown throughout this catalog for our level and flow sensors. These limitations must not be exceeded. These pressures and temperatures take into consideration possible system surge pressures/temperatures and their frequencies.
- Selection of materials for compatibility with the media is critical to the life and operation of Gems products. Take care in the proper selection of materials of construction, testing is required.
- Our sensors have been designed to resist shock and vibration. However, shock and vibration should be minimized.
- Filter liquid media containing particulate and/or debris to ensure the proper operation of our products.
- Electrical entries and mounting points in an enclosed tank may require liquid/vapor sealing.
- Our sensors must not be field-repaired.
- Physical damage sustained by product may render it unserviceable.
- See our website, ([www.gemssensors.com](http://www.gemssensors.com)) for additional technical specifications.



# SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

# [www.scatts.co.uk](http://www.scatts.co.uk)