

Flow Rate Monitoring for Potable Water – RFO-PW Type

► 4.5 to 24 VDC Pulsed Output

FDA-compliant rotor and bodies for compatibility with potable water applications. Gems Sensors popularized the RotorFlow® sensor's paddlewheel design by combining high visibility rotors with solid-state electronics that are packaged into compact, panel mounting housings. They provide accurate flow rate output with integral visual confirmation...all with an unprecedented price/performance ratio. The RFO-PW Potable Water RotorFlow® sensor features a VDC pulsed output for potable water applications where a flow rate monitoring sensor is needed.

Typical Applications

- Water Purification/Dispensing Systems • Chemical Injection Systems

Specifications

Wetted Materials	
Body	316 Stainless Steel or Polypropylene (Hydrolytically Stable, Glass Reinforced)
Rotor Pin	Ceramic
Rotor	Molded Nylon/FDA Epoxy
Lens	Polysulfone ¹
O-Ring	EPDM
Low Flow Adaptor	Glass Reinforced Polypropylene
Operating Pressure, Maximum	
Stainless Steel Body	Optional SS Face Plate 500 PSI 200 PSIG (13.8 bar) @ 70°F (21°C), 100 PSI (6.9 bar) Max. @ 212°F (100°C) ¹
Polypropylene Body	100 PSIG (6.9 bar) @ 70°F (21°C), 40 PSI (2.8 bar) Max. @ 180°F (82°C)
Operating Temperature	
Stainless Steel Body	-20°F to 212°F (-29°C to 100°C)
Polypropylene Body	-20°F to 180°F (-29°C to 82°C)
Electronics	
Input Power	4.5 VDC to 24 VDC
Output Signal	4.5 VDC to 24 VDC Pulse. (Sourcing) Pulse Rate Dependent on Flow Rate, Port Size and Range.
Current Consumption	8 mA, No Load
Current Source Output, Max.	20 mA
Frequency Output Range	15 Hz (Low Flow) to 225 Hz (High Flow)
Accuracy	See Table Below
Electrical Termination	22 AWG PVC-Jacketed, 24" Cable. Color Coded: Red = +VDC; Black = Ground; White = Signal Output

Notes:

1. For higher pressure/temperature ratings, stainless face plates are available. Consult factory.

How To Order


Specify Part Number based on desired body material and port size.

Body Material	Port Size NPT	Flow Ranges – GPM		Flow Ranges – LPM		Part Number
		Low*	Standard	Low*	Standard	
Polypropylene	.25"	0.1 to 1.0	0.5 to 5.0	0.1 to 1.0	1.9 to 18.9	247436
	.50"	1.5 to 12.0	4.0 to 20.0	5.7 to 45.4	15.1 to 75.7	155483
Stainless Steel	.50"	1.5 to 12.0	4.0 to 20.0	5.7 to 45.4	15.1 to 75.7	261017
	.75"	—	5.0 to 30.0	—	18.9 to 113.6	261018
	1.00"	—	8.0 to 60.0	—	30.2 to 227.1	261019




Dimensions


Polypropylene Bodies

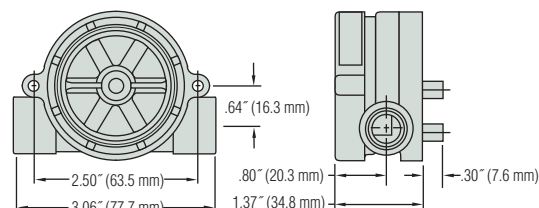

Stainless Steel Bodies - .50" Ports

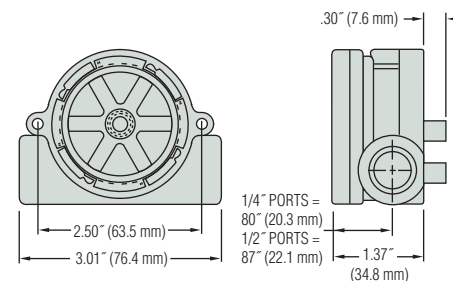

Stainless Steel Bodies – .75" and 1.00" NPT Ports

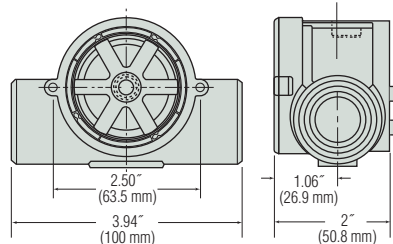

High Visibility


Blue Rotor
FDA-compliant molded nylon and epoxy RotorFlow® indicator for compatibility with potable water applications.



Note: Improved accuracy can be achieved by calibrating the individual RFO unit.

*With use of Low Flow Adapter supplied. See Page F-8 for more information.

Operating Principle

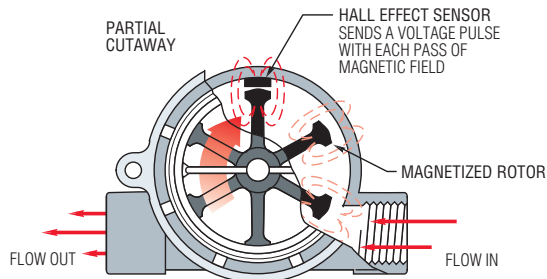




1. As liquid passes through the RotorFlow® body, the magnetic rotor spins at a rate proportional to flow. This causes a series of magnetic fields (the rotor vanes) to excite the Hall Effect sensor, producing a series of voltage pulses.
2. The output pulses (RFO) are at the same voltage level as the input (4.5 - 24 VDC) with a frequency proportional to the flow rate. The output signal can be utilized by digital rate meters totalizers or other electronic controllers. RFA Type analog sensors condition the output signal to 0-10 VDC.
3. RotorFlow® Indicators may be mounted with flow entering either port. Performance is optimized by positioning ports at the top of the unit, in a horizontal plane.

Frequency vs. Flow Rate-Typical

Flow Rate (GPM)	Output Frequency – Hz					
	RFO Model – Based on Port Size					
	.25"	.25" with Adapter*	.50"	.50" with Adapter*	.75"	1"
0.10		13				
0.25		41				
0.50	15	90				
0.75		137				
1.0	34	186				
1.5	54			17		
2.0	73			25.9		
2.5	90			34		
3.0	110			43		
3.5	128					
4.0	148		34	60		
4.5	168					
5.0	185		44.8	76.7	24	
6.0			55	94		
7.0			65.9	111		
8.0			76	129		22
9.0			87.5	147		
10			99	165	61	30
11			110	185		
12			122	204		
13			135			
14			147			
15			158		93	43
16			170			
17			183			
18			195			
19			207			
20			220		128	60
25					163	74
30					196	91
35						107
40						123
45						137
50						153
55						170
60						185

*Low Flow Adapter


Pressure Drop-Typical

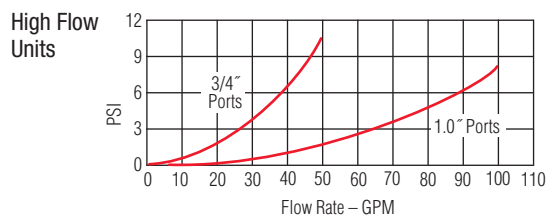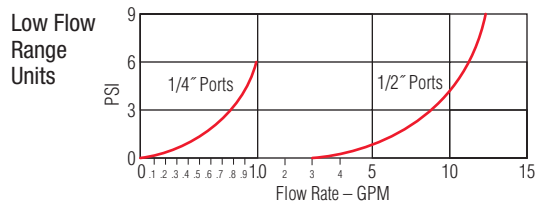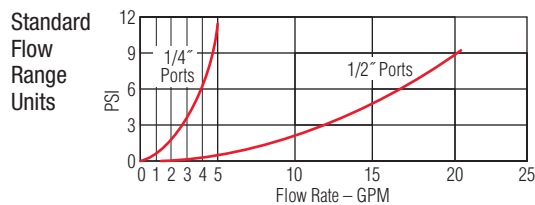


Signal Output

Output signal for RFO Types is an on/off pulse of the DC voltage supplied to the unit, it is compatible with all digital logic families. Input voltage range is 4.5 to 24 VDC. Frequency of the output pulse is proportional to the flow rate and ranges from approximately 15 Hz at low flow to 225 Hz at high flow.

Example:
Low Flow

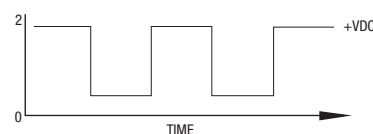

High Flow



Note: Consult factory for flow rate/frequency curves.



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk