

**TDK-Lambda****DPP120-960 Series****120W, 240W, 480W & 960W 3 Phase DIN Rail Mount Power Supplies****Features**

- ◆ Low Cost
- ◆ 12V, 24V or 48V Outputs
- ◆ Wide Range 340 to 575VAC Input
- ◆ Parallel Function Switch (240 & 480W)
- ◆ Current Share (960W)
- ◆ -40<sup>(3)</sup> to +71°C Operation

**Key Market Segments & Applications**

Industrial



RoHS

**Specifications**

Model		DPP120-xx-3	DPP240-xx-3	DPP480-xx-3	DPP960-xx-3
AC Input Voltage range (1)	VAC	340 - 575VAC, three phase			
Input Frequency	Hz	47 - 63Hz			
DC Input Voltage range	VDC	480 - 820VDC*			
Inrush Current (380-480VAC)	A	10A	20A	20A	30A
Power Factor (2)	-	0.55	0.55	0.65	0.8
Input Current (400VAC) (typ)	A	0.36A	0.65A	1.1A	1.72A
Output Voltage Accuracy	%	-0, +1% of Nominal			
Line Regulation	%	±1%			
Load Regulation	%	±1% (±5% when set in parallel mode)			
Ripple and Noise (20MHz BW)	mV	100mV	100mV	100mV	80mV
Overcurrent Protection (Typ)	-	115 - 135%	120 - 140%	110 - 135%	110 - 130%
Overvoltage Protection	V	See model selector			
Overtemperature Protection	-	Yes, auto recovery			
Hold Up Time (380-480VAC)	ms	> 20ms	> 20ms	> 20ms	> 15ms
Parallel operation (up to 90% load)	-	Set in parallel (droop) mode - up to 2 units			
LED Indicators	-	Green LED = On, Red LED = DC Output Low			
DC Good Relay (24V models only)	-	0.3A rated normally open relay contacts, closes when output is above 17.6 - 19.4V			
Operating Temperature	-	-40 <sup>(3)</sup> to +71°C (Derate linearly 2.5%/°C from 61 to 71°C, 3.5%/°C for DPP960) <sup>3</sup>			
Storage Temperature	-	-40 to +85°C			
Operating Humidity (non condensing)	-	20 - 95% RH			
Cooling	-	Convection. Recommend 1" clearance on all sides			
Withstand Voltage	-	Input to Output 3kVAC, Input to Ground 1.5kVAC for 1 min.			
Isolation Resistance	-	>100M at 25°C & 70%RH, Output to Ground 500VDC			
Vibration	-	IEC 60068-2-6. 10- 500Hz, 2G on X, Y & Z axes			
Shock	-	IEC 60068-2-27. Half sinewave, 4G, 22ms, 3 times each face			
Vibration (Operating)	-	IEC 60068-2-6 (Mounting by rail: Random wave, 10-500 Hz, 2G, ea. along X, Y, Z axes 10 min/cycle, 60 min)			
Shock (Operating)	-	IEC 60068-2-27 (Half sine wave, 4G, 22ms, 3 axes, 6 Faces, 3 times for each face)			
Safety Agency Approvals	-	UL508 Listed, UL60950-1, EN60950-1, CE			
Conducted & Radiated EMI	-	EN55022 class B			
Immunity	-	IEC 61000-4-2, -3, 4, -5, -6, -8, -11			
Weight (Typ)	g	800g	1100g	1720g	3400g
Size (LxWxH)	mm	112 x 74 x 124mm	112 x 89 x 124mm	112 x 150 x 124mm	112 x 275.8 x 126.2
Size (LxWxH)	in	4.41 x 2.91 x 4.88"	4.41 x 3.5 x 4.88"	4.41 x 5.91 x 4.88"	4.41 x 10.86 x 4.97"
Switching Frequency	kHz	70kHz	25kHz	80kHz	52kHz
MTBF (Bellcore Issue 6 @40°C, GB)	Hours	527,000	488,000	411,000	352,000
Case material	-	Metal			
Warranty	yrs	Three years			





(1) Bi-phase input is permissible, but output load must be derated to 75% load

(2) Passive, meets EN61000-3-2

(3) DPP480 -30°C

\*Safety certified for AC input only

Model Selector					
Model	Voltage (V)	Adjust Range (V)	Output Current (A)	Overvoltage (V)	Efficiency (%)
DPP120-12-3	12V	11.4 - 14.5V	10A	14.5 - 17.4V	87%
DPP120-24-3	24V	22.5 - 28.5V	5A	30 - 33V	89%
DPP240-24-3	24V	22.5 - 28.5V	10A	30 - 33V	90%
DPP480-24-3	24V	22.5 - 28.5V	20A	30 - 33V	90%
DPP960-24-3	24V	22.5 - 28.5V	40A	30 - 33V	92%
DPP240-48-3	48V	47 - 56V	5A	60 - 68V	91%
DPP480-48-3	48V	47 - 56V	10A	60 - 68V	91%
DPP960-48-3	48V	47 - 56V	20A	60 - 68V	93%

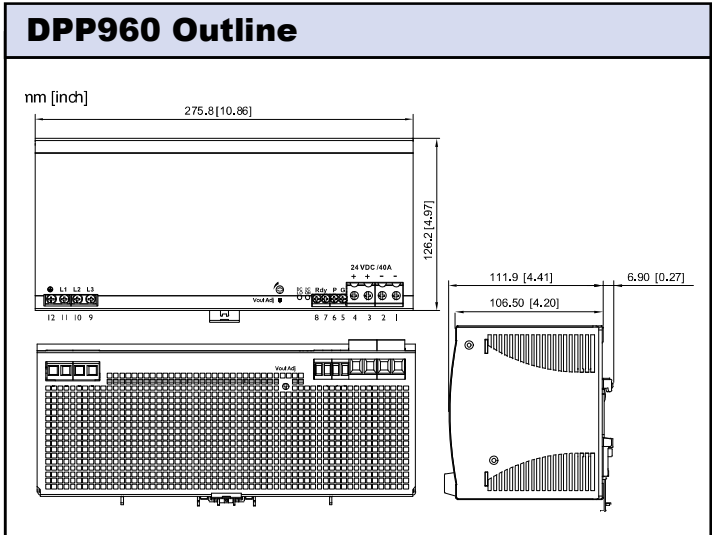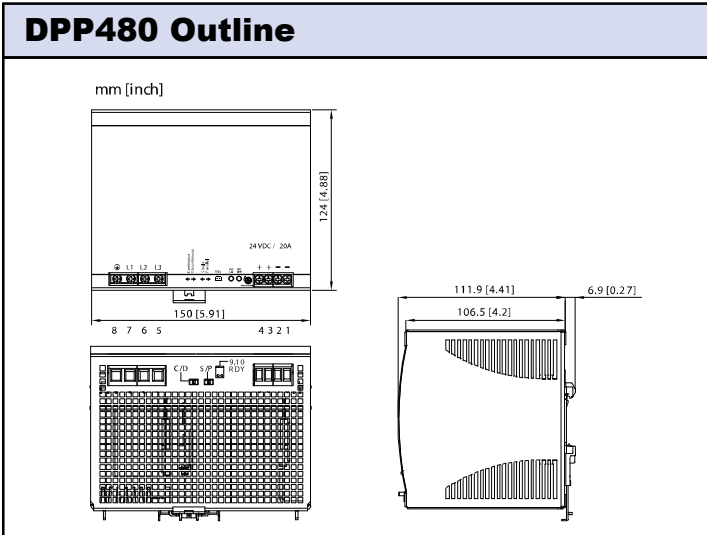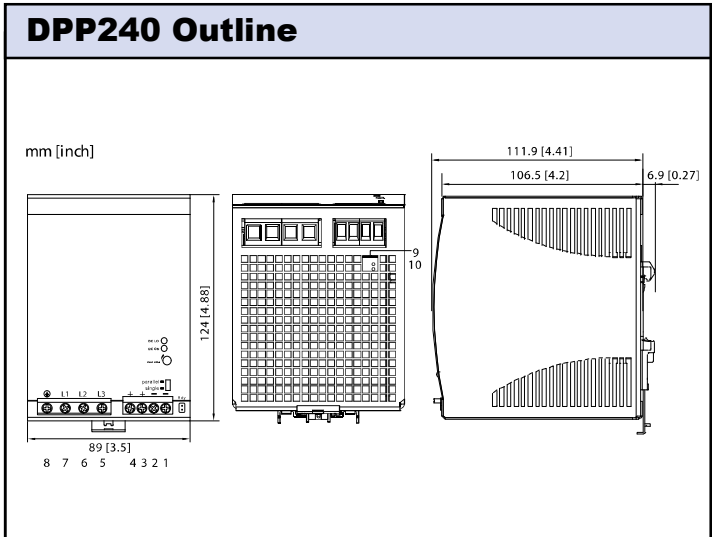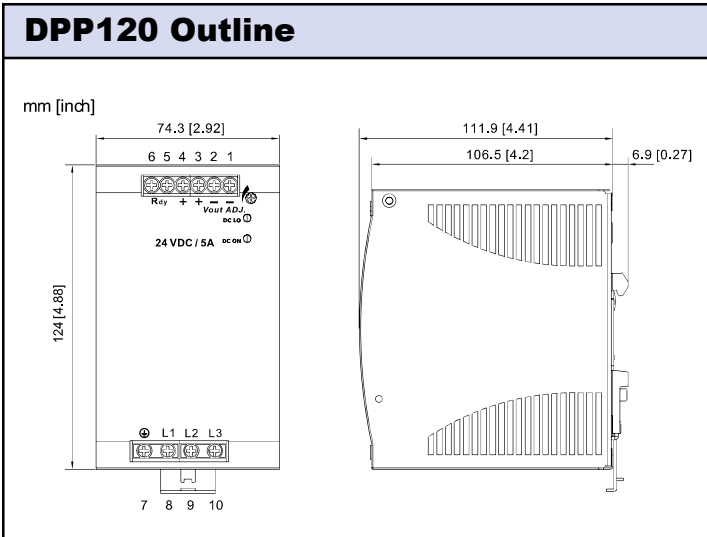

### Other DIN Rail Products

DPP	15W to 480W
DSP	10W to 100W low profile
DLP	75W to 240W single phase

Snap-on Mounting: snap onto DIN Rail TS35/7.5 or TS35/15. (no tools required)

For Additional Information, please visit  
<https://product.tdk.com/info/en/products/power/index.html>





# SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

# [www.scatts.co.uk](http://www.scatts.co.uk)