

TDK-Lambda**DPP120-240 Series****120W & 240W DIN Rail Mount Power Supplies****Features**

- ◆ Low Cost
- ◆ 12V, 24V or 48V Outputs
- ◆ Auto-ranging input (no manual switching)
- ◆ Parallel Function Switch
- ◆ -40⁽²⁾ to +71°C Operation

Key Market Segments & Applications

Industrial



RoHS

Specifications



Model		DPP120-xx-1	DPP240-xx-1
AC Input Voltage range	VAC	93 - 132 / 186 - 264VAC, single phase. Auto select	
Input Frequency	Hz	47 - 63Hz	
DC Input Voltage range	VDC	210 - 370VDC*	
Inrush Current (115 / 230VAC)	A	24 / 48A	30 / 60A
Power Factor	-	Meets EN61000-3-2	
Input Current (115 / 230VAC)	A	2.8 / 1.4A	5.4 / 2.2A
Leakage Current	mA	3.5mA	
Output Voltage Accuracy	%	-0, +1% of Nominal	
Line Regulation	%	±0.5%	
Load Regulation	%	±1% (±5% when set in parallel mode)	
Ripple and Noise (20MHz BW)	mV	50mV	100mV
Overcurrent Protection (Typ)	-	110 - 145%	
Overvoltage Protection	V	See model selector	
Overtemperature Protection	-	-	
Hold Up Time (230VAC input)	ms	> 30ms	
Parallel operation	-	Set in parallel (droop) mode - maximum of 3 units	
LED Indicators	-	Green LED = On, Red LED = DC Output Low	
DC Good Relay (24V model only)	-	0.3A rated normally open relay contacts, closes when output is above 17.6 - 19.4V	
Operating Temperature	°C	-40 ⁽²⁾ to +71°C (Derate linearly 2.5%/°C from 61 to 71°C)	
Storage Temperature	°C	-40 to +85°C	
Operating Humidity	-	20 - 95% RH (non condensing)	
Cooling (1)	-	Convection	
Withstand Voltage	-	Input to Output 3kVAC for 1 min.	
Isolation Resistance	-	>100M at 25C & 70%RH, Output to Ground 500VDC	
Vibration (Operating)	-	IEC 60068-2-6 (Mounting by rail: Random wave, 10-500 Hz, 2G, ea. along X, Y, Z axes 10 min/cycle, 60 min)	
Shock (Operating)	-	IEC 60068-2-27 (Half sine wave, 4G, 22ms, 3 axes, 6 Faces, 3 times for each face)	
Safety Agency Approvals	-	UL508 Listed, UL60950-1, EN60950-1, CE	
Conducted & Radiated EMI	-	EN55022 class B	EN55022 class A
Immunity	-	IEC 61000-4-2, -3, 4, -5, -6, -8, -11	
Weight (Typ)	g	920	1000
Size (LxWxH)	mm	116.6 x 63.5 x 125mm	116 x 83 x 125mm
Size (LxWxH) (1)	in	4.59 x 2.5 x 4.92"	4.57 x 3.27 x 4.92"
Case material	-	Metal	
Warranty	yrs	Three years	

(1) Recommend 1" clearance on all sides



(2) DPP120 -35°C

*Safety certified for AC input only

Outline Drawing (DPP120)

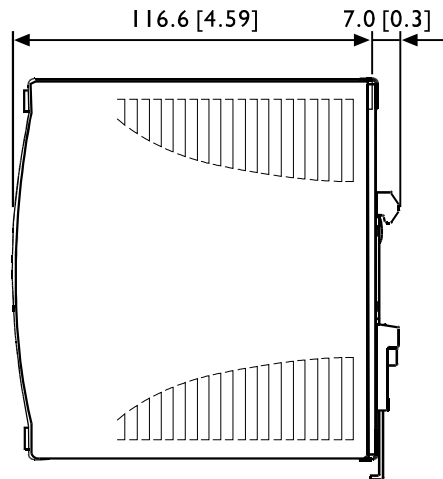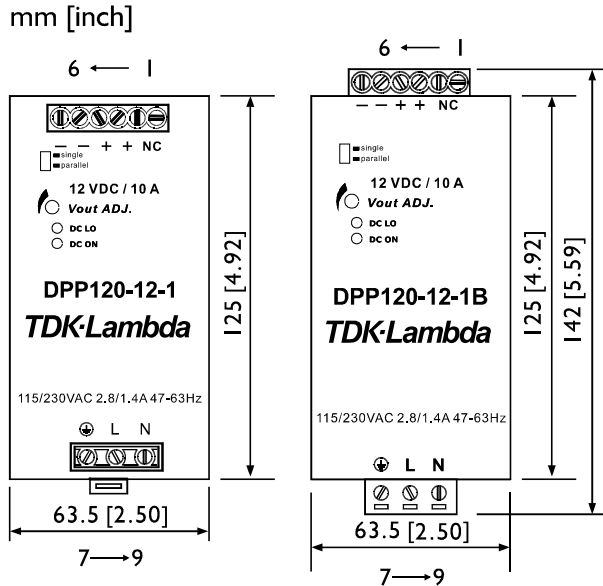

Outline Drawing (DPP240)

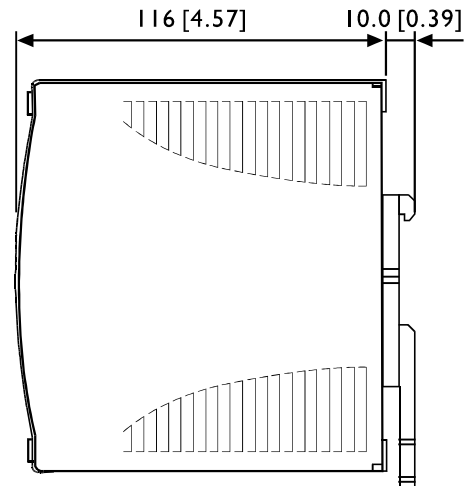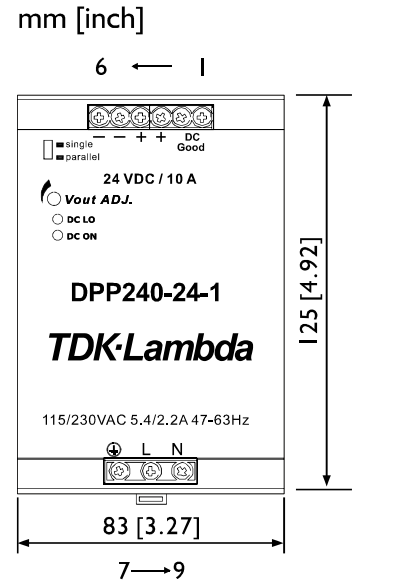

Model Selector

Model	Voltage	Adjust. Range	Output Curr.	Over-voltage	Eff.
DPP120-12-1	12V	11.4 - 14.5V	10A	15 - 17.4V	84%
DPP120-24-1	24V	22.5 - 28.5V	5A	30 - 34.8V	86%
DPP120-48-1	48V	45 - 55V	2.5A	60 - 69.6V	87%
DPP240-24-1	24V	22.5 - 28.5V	10A	30 - 34.8V	89%
DPP240-48-1	48V	47 - 56V	5A	60 - 69.6V	90%

Other DIN Rail Products

DPP	15W to 100W
DPP480	480W single and three phase
DSP	10W to 100W low profile
DLP	75W to 240W single phase

Terminal Assignments

#	Function
1	DC Good relay
2	DC Good relay
3	+V
4	+V
5	-V
6	-V
7	Chassis ground
8	L
9	N

Snap-on Mounting: snap onto DIN Rail TS35/7.5 or TS35/15. (no tools required)

Options

Suffix	Description
Blank	Non detachable connectors
B	Detachable input and output connectors

For Additional Information, please visit
<https://product.tdk.com/info/en/products/power/index.html>





SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk