




SERIES V10 | W. E. ANDERSON™ BY DWYER

FLOTECT® MINI-SIZE FLOW SWITCH

Proof of Flow or No Flow in 1/2 to 2" Pipe, Cost Effective, Leak Proof Body, Weatherproof

Flow Switches, Paddle

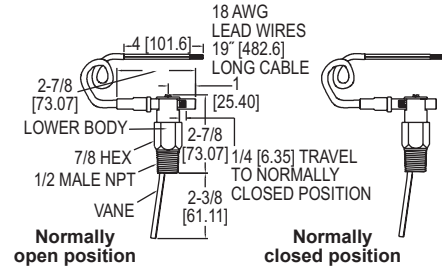

The **Series V10 FloTECT® Mini-Size Flow Switch** is designed to provide inexpensive, reliable monitoring of the presence or absence of flow in a system. This series is available for field installation in pipelines from 1/2 to 2" diameter and available in brass or 303 SS body.

FEATURES/BENEFITS

- Magnetically actuated switching design gives superior performance with rugged, hermetically sealed reed switch
- Simple field switch adjustment allows user to toggle between Normally Open (NO) or Normally Closed (NC) with no change in the electrical connection
- Switch housing is located outside the process media, allowing simple switch change-over or maintenance without interruption of process flow
- Full size, field trimmable stainless steel vane provided with removable template calibrated for brass or ductile iron reducing tees with forged steel straight tee/bushing combinations

APPLICATIONS

- Proving flow in boilers, hot water heaters, and chillers
- Protects pumps, motors and other equipment against low or no flow
- Automatically starts auxiliary pumps and engines

| APPROXIMATE ACTUATION/DEACTUATION FLOW RATES FOR COLD WATER; GPM (LPM) | | | | APPROXIMATE ACTUATION/DEACTUATION FLOW RATES FOR AIR; SCFM (LPM) | | | |
|--|------|---------------------|---------------------|--|------|-----------------------|-----------------------|
| Pipe Size | Trim | N.O. | N.C. | Pipe Size | Trim | N.O. | N.C. |
| 1/2" | L | 2.6/2.3 (9.8/8.7) | 2.6/2.5 (9.8/9.5) | 1/2" | L | 10.3/8.8 (291.7/250) | 10.2/9.2 (288/260) |
| 3/4" | J | 3.1/2.7 (11.7/10.2) | 3.1/2.8 (11.7/10.6) | 3/4" | J | 13/11.6 (368.3/328) | 12.9/11.6 (365/328) |
| 1" | H | 4.8/4.5 (18.2/17) | 4.8/4.4 (18.2/16.7) | 1" | H | 19.2/17.6 (543.3/498) | 18.9/17.6 (535/498) |
| 1-1/4" | E | 6.2/5.6 (23.5/21.2) | 6.1/5.6 (23.1/21.2) | 1-1/4" | E | 24.8/22.2 (701.7/628) | 24.5/22.5 (693/637) |
| 1-1/2" | C | 8.2/7.7 (31/29.1) | 8.2/7.7 (31/29.1) | 1-1/2" | C | 33.4/31.2 (946.7/883) | 33/30.6 (935/867) |
| 2" | Full | 9.5/9.1 (36/34.4) | 9.5/9 (36/34.1) | 2" | Full | 50.2/48.4 (1422/1370) | 50.2/47.7 (1422/1352) |

SPECIFICATIONS

Service: Compatible gases or liquids.
Wetted Materials: Vane: 301 SS; Body: Brass or 303 SS; Pin and magnet: Ceramic 8.
Temperature Limit: 200°F (93°C).
Pressure Limit: Brass body: 1000 psig (69 bar); 303 SS body: 2000 psig (138 bar).
Enclosure Rating: Weatherproof, meets NEMA 4X (IP66).
Switch Type: SPST hermetically sealed reed switch. Field adjustable for normally open or normally closed.
Electrical Rating: 0.5 A @ 120 VAC; 1.5 A @ 24 VDC res.; 0.001 A @ 200 VDC res.

Electrical Connections: 18 AWG, 19" (483 mm) long, PVC jacket. Rated 221°F (105°C).
Process Connection: 1/2" male NPT or 1/2" male BSPT.
Mounting Orientation: Switch can be installed in any position but the actuation/deactuation flow rates are based on horizontal pipe runs and are nominal values.
Set Point Adjustment: Vane is trimmable.
Weight: 5.5 oz (0.16 kg).
Agency Approvals: CE, CSA, UR.
Switch Enclosure: Nylon.

MODEL CHART

| Model | Body Material | Connection Type | Switch Configuration |
|------------|---------------|-----------------|-------------------------|
| V10 | Brass | NPT | Normally open or closed |
| V10SS | 303 SS | NPT | Normally open or closed |
| V10-BSPT | Brass | BSPT | Normally open or closed |
| V10SS-BSPT | 303 SS | BSPT | Normally open or closed |

USA: California Proposition 65

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk