




Series V8 Flotect® Flow Switch

Specifications - Installation and Operating Instructions

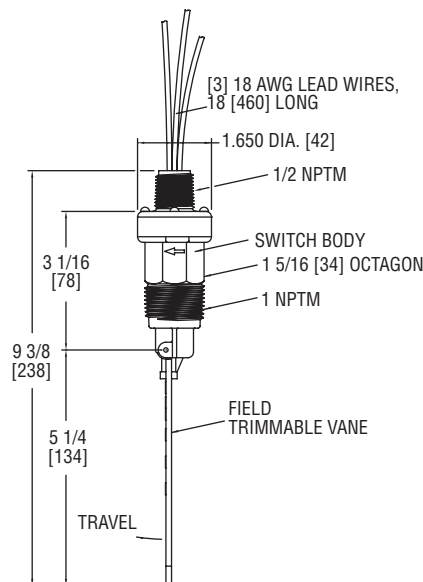

INSTALLATION

1. The Model V8 Flow Switch is intended for use in clean, compatible process media free from scale, debris and other foreign matter which might collect on the vane and impede its movement. Buildup from such materials will prevent proper operation.

2. Carefully unpack the switch being certain to remove any packing material which might have become lodged between the switch housing and the vane assembly. Note the pipe size indicators molded into the vane. By trimming at the mark corresponding to the pipe size being used, approximate actuation/deactuation flows will be as shown in the charts at right. These values apply to installations with a three-o-let, branch connection or plastic fitting. If using standard 125-250 lb. bronze, iron or steel fittings, trim the vane 0.125" above the mark. Due to variations in fittings and amount of thread engagement, vane must be checked for proper operation.

3. The flow switch must be properly indexed during installation. The arrow on the side must point in the direction of flow.

4. Use Teflon® thread tape or other suitable pipe joint compound to seal the 1" NPT mounting connection. Avoid excess sealant which could interfere with vane movement and prevent proper operation. Do not exceed 50 ft/lbs (40 n/m) torque on the switch housing. Damage can result.

5. Wire in accordance with local electrical codes. Lead wire colors are as follows: Black - Common, Red - Normally Open, Blue - Normally Closed. Normal is the contact condition with no flow in the system. Closed contacts open and open contacts close when increasing flow reaches the actuation point.

6. Switch electrical components must be protected from moisture at all times. If necessary, install a lightweight waterproof junction box over the 1/2" NPT threaded stem. Do not place mechanical loading on the switch housing. Permanent damage can occur. Use flexible Romex sheathing or equivalent.

SPECIFICATIONS

Maximum Temperature: 212°F (100°C).

Maximum Pressure: 150 psig (10.3 bar).

Process Connection: 1" NPTM.

Conduit Connection: 1/2" male NPT, 1/2" female NPT on WP and WP2.

Switch Type: SPDT snap switch; MV option: SPDT gold contact snap switch.

Electrical Rating: 5 A @ 125/250 VAC. MV Option: 0.1 A @ 125 VAC.

Wire Leads: 18 AWG x 18 in (45.7 cm).

Overall Length: 9.375 in (23.8 cm).

Switch Body: Polyphenylene sulphide (PPS).

Wetted Materials: Polyphenylene sulphide, ceramic 8 magnet, 316 stainless steel.

Vane: Field trimmable.

Mounting Orientation: Actuation/deactuation flow rates are based on horizontal pipe runs and are nominal values. Unit cannot be used with vertical down flow.

Weight: 4.5 oz (128 g).

Cold water Flow Rates		Air Flow Rates	
Pipe Size	Approx. Actuation/Deactuation GPM Upper, LPM Lower	Pipe Size	Approx. Actuation/Deactuation SCFM Upper, NM ³ /H Lower
1"	10.8/9.1 40.9/34.6	1"	39/32.6 66.3/55.4
1-1/4"	9.8/8.3 37.2/31.4	1-1/4"	37.5/32.2 63.7/54.7
1-1/2"	8.6/6.8 32.4/25.7	1-1/2"	33.4/26.7 56.7/45.4
2"	10.9/8.8 41.2/33.4	2"	43/36.8 73.1/62.5
3"	12.9/8.9 48.8/33.5	3"	52.7/38.9 89.6/66
4"	21.1/13.8 79.7/52.2	4"	87.6/63.6 148.9/108.1
6"	45/33 170.2/124.7	6"	168.6/137.4 286.5/233.4



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk