DOWNLOADED FROM WWW.SCATTS.CO.UK

# Standard fittings, IP 67, nickel plated brass

## ANACONDA NICKEL PLATED BRASS FITTINGS FOR ANACONDA SEALTITE

Anaconda standard nickel plated brass fittings can be used with all types of Anaconda Sealtite (except CNP). This Anaconda fitting is an universal fitting and offers excellent corrosion protection in combination with a nice appearance. Because of the UL & CSA approvals the fittings are also suitable for export projects outside Europe.

### Material & Construction:

**Construction:** Nickel plated brass fitting, consisting of 4 parts (counter nut, clamping ring, ferrule and body).
**Material:** Counter nut, body and ferrule are nickel plated brass with exception of size 3/8" till 1" where the ferrule is from galvanised steel. Clamping ring and inserts are made from PA6 (red for ISO metric, blue for Pg and white for NPT).
**Special approvals:** UL-514B and CSA C 22.2 (combined UL / CSA CUL) file # E 234207).
Suitable for use in hazardous environments according to NEC:

- Article 501.10 (B) (2) Class I, Division 2.
- Article 502.10 (A) (2) and (B) (2). Class II, Division 1 and 2.
- Article 503.10 (A) (3) and (B). Class III, Division 1 and 2.

**Temperature:** -45 °C till +105 °C continuous (cable-hose fittings are -40 °C till +100 °C).
**Protection class:** IP 67, with cable-hose fittings an IP 68 rate on the switchbox can be obtained.
**Colour:** Metal coloured.




### ISO straight fitting, male, nickel plated brass

| THREAD ISO | SEALTITE SIZE (INCH) | MIN. INTERNAL BORE (MM) | DIMENSIONS IN MM | | | | | STANDARD PACKAGE | ARTICLE NUMBER | WEIGHT (KG/100) |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | A | B | C | D | E | | | |
| M12 x 1,5 | 1/4" | 5,2 | 33 | 10 | 22 | - | 20 | 10 | 812.012.1* | 4,8 |
| M16 x 1,5 | 5/16" | 8,3 | 35 | 12 | 26 | - | 24 | 10 | 812.015.1* | 5,2 |
| M20 x 1,5 | 5/16" | 8,3 | 36 | 13 | 26 | - | 24 | 10 | 812.014.1* | 5,5 |
| M16 x 1,5 | 3/8" | 10,2 | 35 | 12 | 26 | - | 24 | 10 | 812.016.1 | 4,8 |
| M20 x 1,5 | 3/8" | 10,2 | 36 | 13 | 26 | - | 24 | 10 | 812.017.1 | 5,1 |
| M20 x 1,5 | 1/2" | 13,9 | 37 | 13 | 29 | - | 27 | 10 | 812.020.1 | 5,9 |
| M25 x 1,5 | 3/4" | 18,5 | 40 | 15 | 35 | - | 33 | 5 | 812.025.1 | 7,9 |
| M32 x 1,5 | 1" | 23,8 | 46 | 15 | 45 | - | 43 | 5 | 812.032.1 | 17,5 |
| M40 x 1,5 | 1.1/4" | 31,8 | 52 | 16 | 54 | - | 52 | 2 | 812.040.1 | 27,9 |
| M50 x 1,5 | 1.1/2" | 36,8 | 56 | 18 | 63 | - | 60 | 2 | 812.050.1 | 42,3 |
| M63 x 1,5 | 2" | 47,8 | 66 | 20 | 77 | - | 74 | 2 | 812.063.1 | 73,5 |




### ISO straight fitting, small design, male, nickel plated brass

| THREAD ISO | SEALTITE SIZE (INCH) | MIN. INTERNAL BORE (MM) | DIMENSIONS IN MM | | | | | STANDARD PACKAGE | ARTICLE NUMBER | WEIGHT (KG/100) |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | A | B | C | D | E | | | |
| M12 x 1,5 | 1/4" | 5,2 | 33 | 10 | 19 | - | 17 | 10 | 812.012.2 | 2,8 |
| M16 x 1,5 | 1/4" | 5,2 | 35 | 12 | 19 | - | 19 | 10 | 812.013.2 | 3,4 |
| M12 x 1,5 | 5/16" | 8,3 | 33 | 10 | 22 | - | 20 | 10 | 812.011.2 | 3,6 |
| M16 x 1,5 | 5/16" | 8,3 | 35 | 12 | 22 | - | 20 | 10 | 812.015.2 | 3,8 |
| M20 x 1,5 | 5/16" | 8,3 | 36 | 13 | 22 | - | 24 | 10 | 812.014.2 | 4,2 |

* Sizes 1/4" and 5/16" do not have UL / CSA approval.



DOWNLOADED FROM WWW.SCATTS.CO.UK

DOWNLOADED FROM WWW.SCATTS.CO.UK

# STANDARD FITTINGS, IP 67, NICKEL PLATED BRASS

## ISO straight fitting, female, nickel plated brass




| THREAD ISO | SEALTITE SIZE (INCH) | MIN. INTERNAL BORE (MM) | DIMENSIONS IN MM | | | | | STANDARD PACKAGE | ARTICLE NUMBER | WEIGHT (KG/100) |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | A | B | C | D | E | | | |
| M16 x 1,5 | 5/16" | 8,3 | 35 | 12 | 26 | - | 24 | 10 | 812.315.1* | 5,4 |
| M16 x 1,5 | 3/8" | 10,2 | 35 | 12 | 26 | - | 24 | 10 | 812.316.1 | 5 |
| M20 x 1,5 | 1/2" | 13,9 | 37 | 13 | 29 | - | 27 | 10 | 812.320.1 | 7,6 |
| M25 x 1,5 | 3/4" | 18,5 | 40 | 15 | 35 | - | 33 | 5 | 812.325.1 | 9 |
| M32 x 1,5 | 1" | 23,8 | 46 | 15 | 45 | - | 43 | 5 | 812.332.1 | 18,3 |
| M40 x 1,5 | 1.1/4" | 31,8 | 52 | 16 | 54 | - | 52 | 2 | 812.340.1 | 29,3 |
| M50 x 1,5 | 1.1/2" | 36,8 | 56 | 18 | 63 | - | 60 | 2 | 812.350.1 | 41,2 |
| M63 x 1,5 | 2" | 47,8 | 66 | 20 | 77 | - | 74 | 2 | 812.363.1 | 71,8 |

## ISO 45° fitting, male, nickel plated brass




| THREAD ISO | SEALTITE SIZE (INCH) | MIN. INTERNAL BORE (MM) | DIMENSIONS IN MM | | | | | STANDARD PACKAGE | ARTICLE NUMBER | WEIGHT (KG/100) |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | A | B | C | D | E | | | |
| M16 x 1,5 | 5/16" | 8,3 | 23 | 12 | 26 | 33 | 22 | 10 | 812.415.1* | 7,7 |
| M20 x 1,5 | 5/16" | 8,3 | 24 | 13 | 26 | 33 | 22 | 10 | 812.414.1* | 7,8 |
| M16 x 1,5 | 3/8" | 10,2 | 23 | 12 | 26 | 33 | 22 | 10 | 812.416.1 | 7,3 |
| M20 x 1,5 | 3/8" | 10,2 | 24 | 13 | 26 | 33 | 22 | 10 | 812.417.1 | 7,4 |
| M20 x 1,5 | 1/2" | 13,9 | 25 | 13 | 29 | 33 | 27 | 10 | 812.420.1 | 10,5 |
| M25 x 1,5 | 3/4" | 18,5 | 30 | 15 | 35 | 36 | 33 | 5 | 812.425.1 | 13,6 |
| M32 x 1,5 | 1" | 23,8 | 34 | 15 | 45 | 46 | 42 | 5 | 812.432.1 | 26,5 |
| M40 x 1,5 | 1.1/4" | 31,8 | 39 | 16 | 54 | 54 | 51 | 2 | 812.440.1 | 44,9 |
| M50 x 1,5 | 1.1/2" | 36,8 | 45 | 18 | 63 | 59 | 60 | 2 | 812.450.1 | 67,5 |
| M63 x 1,5 | 2" | 47,8 | 53 | 20 | 77 | 71 | 74 | 2 | 812.463.1 | 128 |

## ISO 90° fitting, male, nickel plated brass




| THREAD ISO | SEALTITE SIZE (INCH) | MIN. INTERNAL BORE (MM) | DIMENSIONS IN MM | | | | | STANDARD PACKAGE | ARTICLE NUMBER | WEIGHT (KG/100) |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | A | B | C | D | E | | | |
| M16 x 1,5 | 5/16" | 8,3 | 32 | 12 | 26 | 42 | 22 | 10 | 812.915.1* | 8,6 |
| M20 x 1,5 | 5/16" | 8,3 | 33 | 13 | 26 | 42 | 22 | 10 | 812.914.1* | 8,8 |
| M16 x 1,5 | 3/8" | 10,2 | 32 | 12 | 26 | 42 | 22 | 10 | 812.916.1 | 8,2 |
| M20 x 1,5 | 3/8" | 10,2 | 33 | 13 | 26 | 42 | 22 | 10 | 812.917.1 | 8,4 |
| M20 x 1,5 | 1/2" | 13,9 | 36 | 13 | 29 | 43 | 27 | 10 | 812.920.1 | 12,6 |
| M25 x 1,5 | 3/4" | 18,5 | 43 | 15 | 35 | 48 | 33 | 5 | 812.925.1 | 19,2 |
| M32 x 1,5 | 1" | 23,8 | 48 | 15 | 45 | 59 | 42 | 5 | 812.932.1 | 31,6 |
| M40 x 1,5 | 1.1/4" | 31,8 | 57 | 16 | 54 | 68 | 51 | 2 | 812.940.1 | 56,1 |
| M50 x 1,5 | 1.1/2" | 36,8 | 63 | 18 | 63 | 78 | 60 | 2 | 812.950.1 | 85,3 |
| M63 x 1,5 | 2" | 47,8 | 74 | 20 | 77 | 96 | 74 | 2 | 812.963.1 | 139,8 |

* Sizes 1/4" and 5/16" do not have UL / CSA approval.





DOWNLOADED FROM WWW.SCATTS.CO.UK

DOWNLOADED FROM WWW.SCATTS.CO.UK

## STANDARD FITTINGS, IP 67, NICKEL PLATED BRASS




### ISO cable-hose fitting, male, nickel plated brass

| THREAD ISO | SEALTITE SIZE (INCH) | CLAMPING RANGE (MM) | DIMENSIONS IN MM | | | | | STANDARD PACKAGE | ARTICLE NUMBER | WEIGHT (KG/100) |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | A | B | C | E | F | | | |
| M16 x 1,5 | 5/16" | 4 - 8 | 57 | 12 | 26 | 24 | 18 | 10 | 812.715.2 | 5,2 |
| M16 x 1,5 | 3/8" | 4 - 8 | 57 | 12 | 26 | 24 | 18 | 10 | 812.716.1 | 7,8 |
| M20 x 1,5 | 3/8" | 6 - 10,2 | 57 | 12 | 26 | 24 | 22 | 10 | 812.717.1 | 9,5 |
| M20 x 1,5 | 1/2" | 6 - 12 | 59 | 12 | 29 | 27 | 22 | 10 | 812.720.1 | 9,7 |
| M25 x 1,5 | 1/2" | 10 - 13,9 | 62 | 12 | 29 | 27 | 27 | 10 | 812.722.1 | 11,7 |
| M32 x 1,5 | 3/4" | 13 - 18 | 70 | 15 | 35 | 33 | 34 | 5 | 812.728.1 | 20,2 |
| M40 x 1,5 | 1" | 18 - 23,5 | 83 | 15 | 45 | 43 | 43 | 2 | 812.735.1 | 32,6 |
| M40 x 1,5 | 1.1/4" | 22 - 31,5 | 96 | 15 | 54 | 52 | 43 | 2 | 812.740.1 | 46 |
| M50 x 1,5 | 1.1/4" | 22 - 31,8 | 96 | 15 | 54 | 52 | 55 | 2 | 812.745.1 | 60 |




### ISO, EMC cable-hose fitting, male, nickel plated brass

| THREAD ISO | SEALTITE SIZE (INCH) | CLAMPING RANGE (MM) | DIMENSIONS IN MM | | | | | STANDARD PACKAGE | ARTICLE NUMBER | WEIGHT (KG/100) |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | A | B | C | E | F | | | |
| M16 x 1,5 | 5/16" | 4 - 8 | 57 | 12 | 26 | 24 | 18 | 10 | 812.615.2 | 5,2 |
| M16 x 1,5 | 3/8" | 4 - 8 | 57 | 12 | 26 | 24 | 18 | 10 | 812.616.1 | 7,8 |
| M20 x 1,5 | 3/8" | 6 - 10,2 | 57 | 12 | 26 | 24 | 22 | 10 | 812.617.1 | 9,5 |
| M20 x 1,5 | 1/2" | 6 - 12 | 59 | 12 | 29 | 27 | 22 | 10 | 812.620.1 | 9,7 |
| M25 x 1,5 | 1/2" | 10 - 13,9 | 62 | 12 | 29 | 27 | 27 | 5 | 812.622.1 | 11,7 |
| M32 x 1,5 | 3/4" | 13 - 18 | 70 | 15 | 35 | 33 | 34 | 5 | 812.628.1 | 19,6 |
| M40 x 1,5 | 1" | 18 - 23,8 | 83 | 15 | 45 | 43 | 43 | 2 | 812.635.1 | 35,4 |




### ISO cable-hose fitting, with extended clamping range, male, nickel plated brass

| THREAD ISO | SEALTITE SIZE (INCH) | CLAMPING RANGE (MM) | DIMENSIONS IN MM | | | | | STANDARD PACKAGE | ARTICLE NUMBER | WEIGHT (KG/100) |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | A | B | C | E | F | | | |
| M16 x 1,5 | 3/8" | 3 - 10,2 | 64 | 12 | 26 | 24 | 20 | 10 | 812.716.2 | 8,2 |
| M20 x 1,5 | 1/2" | 7 - 13,9 | 64 | 12 | 29 | 27 | 24 | 10 | 812.720.2 | 10,2 |
| M25 x 1,5 | 3/4" | 9 - 18,0 | 77 | 15 | 35 | 33 | 30 | 5 | 812.725.2 | 17 |
| M32 x 1,5 | 1" | 13 - 23,8 | 88 | 15 | 45 | 43 | 40 | 5 | 812.732.2 | 31 |
| M40 x 1,5 | 1.1/4" | 20 - 31,8 | 102 | 15 | 54 | 52 | 50 | 2 | 812.740.2 | 54,6 |
| M50 x 1,5 | 1.1/2" | 21 - 36,8 | 106 | 18 | 63 | 60 | 58 | 2 | 812.750.2 | 76,6 |
| M63 x 1,5 | 2" | 27 - 44,0 | 116 | 18 | 77 | 74 | 68 | 2 | 812.763.2 | 116,6 |



DOWNLOADED FROM WWW.SCATTS.CO.UK

DOWNLOADED FROM WWW.SCATTS.CO.UK

# STANDARD FITTINGS, IP 67, NICKEL PLATED BRASS

## Multiple hole seals for cable-hose fittings with extended range

| THREAD ISO | SEALTITE SIZE (INCH) | HOLES X DIAM | DIMENSIONS IN MM | | | | | STANDARD PACKAGE | ARTICLE NUMBER | WEIGHT (KG/100) |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | A | B | C | D | E | | | |
| M20 x 1,5 | 1/2" | 3 x 4,0 | - | - | - | - | - | 100 | 785.234.0* | - |
| M20 x 1,5 | 1/2" | 3 x 5,0 | - | - | - | - | - | 100 | 785.235.0* | - |
| M20 x 1,5 | 1/2" | 4 x 3,0 | - | - | - | - | - | 100 | 785.243.0* | - |
| M20 x 1,5 | 1/2" | 4 x 4,0 | - | - | - | - | - | 100 | 785.244.0* | - |
| M25 x 1,5 | 3/4" | 2 x 7,0 | - | - | - | - | - | 100 | 785.327.0 | - |
| M25 x 1,5 | 3/4" | 3 x 6,6 | - | - | - | - | - | 100 | 785.336.6 | - |
| M25 x 1,5 | 3/4" | 3 x 8,0 | - | - | - | - | - | 100 | 785.338.0 | - |
| M32 x 1,5 | 1" | 3 x 7,5 | - | - | - | - | - | 100 | 785.437.5 | - |
| M32 x 1,5 | 1" | 4 x 8,0 | - | - | - | - | - | 100 | 785.448.0 | - |
| M32 x 1,5 | 1" | 6 x 5,0 | - | - | - | - | - | 100 | 785.465.0 | - |
| M32 x 1,5 | 1" | 6 x 6,0 | - | - | - | - | - | 100 | 785.466.0 | - |

* The seals for M20x1,5 are for the cable-hose fittings in the standard range (pn 812.717.1 or 812.720.1)

** Other (not mentioned hole patterns) are available on request. The multiple hole seals will be delivered separately.




## Pg straight fitting, male, nickel plated brass

| THREAD PG | SEALTITE SIZE (INCH) | MIN. INTERNAL BORE (MM) | DIMENSIONS IN MM | | | | | STANDARD PACKAGE | ARTICLE NUMBER | WEIGHT (KG/100) |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | A | B | C | D | E | | | |
| Pg 7 | 1/4" | 5,2 | 33 | 10 | 22 | - | 20 | 10 | 810.007.1* | 3 |
| Pg 9 | 5/16" | 8,3 | 35 | 12 | 26 | - | 24 | 10 | 810.009.1* | 5,2 |
| Pg 11 | 5/16" | 8,3 | 35 | 12 | 26 | - | 24 | 10 | 810.012.1* | 6 |
| Pg 13,5 | 5/16" | 8,3 | 35 | 12 | 26 | - | 24 | 10 | 810.014.1* | 6 |
| Pg 9 | 3/8" | 10,2 | 35 | 12 | 26 | - | 24 | 10 | 810.010.1* | 4,8 |
| Pg 11 | 3/8" | 10,2 | 35 | 12 | 26 | - | 24 | 10 | 810.011.1 | 5,6 |
| Pg 13,5 | 3/8" | 10,2 | 35 | 12 | 26 | - | 24 | 10 | 810.013.1 | 5,6 |
| Pg 16 | 1/2" | 13,9 | 37 | 13 | 29 | - | 27 | 10 | 810.016.1 | 6,3 |
| Pg 21 | 3/4" | 18,5 | 40 | 15 | 35 | - | 33 | 5 | 810.021.1 | 8,4 |
| Pg 29 | 1" | 23,8 | 46 | 15 | 45 | - | 43 | 5 | 810.029.1 | 25 |
| Pg 36 | 1.1/4" | 31,8 | 52 | 16 | 54 | - | 52 | 2 | 810.036.1 | 34,6 |
| Pg 42 | 1.1/2" | 36,8 | 56 | 18 | 63 | - | 60 | 2 | 810.042.1 | 47,2 |
| Pg 48 | 2" | 47,8 | 66 | 20 | 77 | - | 74 | 2 | 810.048.1 | 72 |




## Pg straight fitting, small design, male, nickel plated brass

| THREAD PG | SEALTITE SIZE (INCH) | MIN. INTERNAL BORE (MM) | DIMENSIONS IN MM | | | | | STANDARD PACKAGE | ARTICLE NUMBER | WEIGHT (KG/100) |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | A | B | C | D | E | | | |
| Pg 7 | 1/4" | 5,2 | 33 | 10 | 19 | - | 17 | 10 | 810.007.2 | 2,8 |
| Pg 9 | 5/16" | 8,3 | 35 | 12 | 22 | - | 20 | 10 | 810.009.2 | 3,8 |

* Sizes 1/4" and 5/16" do not have UL / CSA approval.



DOWNLOADED FROM WWW.SCATTS.CO.UK

DOWNLOADED FROM WWW.SCATTS.CO.UK

# STANDARD FITTINGS, IP 67, NICKEL PLATED BRASS

## Pg straight fitting, female, nickel plated brass




| THREAD PG | SEALTITE SIZE (INCH) | MIN. INTERNAL BORE (MM) | DIMENSIONS IN MM | | | | | STANDARD PACKAGE | ARTICLE NUMBER | WEIGHT (KG/100) |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | A | B | C | D | E | | | |
| Pg 11 | 5/16" | 8,3 | 35 | 12 | 26 | - | 24 | 10 | 810.312.1* | 5,7 |
| Pg 13,5 | 5/16" | 8,3 | 35 | 12 | 26 | - | 24 | 10 | 810.314.1* | 5,7 |
| Pg 11 | 3/8" | 10,2 | 35 | 12 | 26 | - | 24 | 10 | 810.311.1 | 5,3 |
| Pg 13,5 | 3/8" | 10,2 | 35 | 12 | 26 | - | 24 | 10 | 810.313.1 | 5,3 |
| Pg 16 | 1/2" | 13,9 | 37 | 13 | 29 | - | 27 | 10 | 810.316.1 | 6,3 |
| Pg 21 | 3/4" | 18,5 | 40 | 15 | 35 | - | 33 | 5 | 810.321.1 | 9,3 |
| Pg 29 | 1" | 23,8 | 46 | 15 | 45 | - | 43 | 5 | 810.329.1 | 20,7 |
| Pg 36 | 1.1/4" | 31,8 | 52 | 16 | 54 | - | 52 | 2 | 810.336.1 | 29,3 |
| Pg 42 | 1.1/2" | 36,8 | 56 | 18 | 63 | - | 60 | 2 | 810.342.1 | 43,2 |
| Pg 48 | 2" | 47,8 | 66 | 20 | 77 | - | 74 | 2 | 810.348.1 | 74,8 |

## Pg 45° fitting, male, nickel plated brass




| THREAD PG | SEALTITE SIZE (INCH) | MIN. INTERNAL BORE (MM) | DIMENSIONS IN MM | | | | | STANDARD PACKAGE | ARTICLE NUMBER | WEIGHT (KG/100) |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | A | B | C | D | E | | | |
| Pg 11 | 5/16" | 8,3 | 23 | 12 | 26 | 33 | 22 | 10 | 810.412.1* | 8,5 |
| Pg 13,5 | 5/16" | 8,3 | 23 | 12 | 26 | 33 | 22 | 10 | 810.414.1* | 8,5 |
| Pg 11 | 3/8" | 10,2 | 23 | 12 | 26 | 33 | 22 | 10 | 810.411.1 | 8,1 |
| Pg 13,5 | 3/8" | 10,2 | 23 | 12 | 26 | 33 | 22 | 10 | 810.413.1 | 8,1 |
| Pg 16 | 1/2" | 13,9 | 25 | 13 | 29 | 33 | 27 | 10 | 810.416.1 | 11,6 |
| Pg 21 | 3/4" | 18,5 | 30 | 15 | 35 | 36 | 33 | 5 | 810.421.1 | 15,3 |
| Pg 29 | 1" | 23,8 | 34 | 15 | 45 | 46 | 42 | 5 | 810.429.1 | 31,5 |
| Pg 36 | 1.1/4" | 31,8 | 39 | 16 | 54 | 54 | 51 | 2 | 810.436.1 | 53,2 |
| Pg 42 | 1.1/2" | 36,8 | 45 | 18 | 63 | 59 | 60 | 2 | 810.442.1 | 78,5 |
| Pg 48 | 2" | 47,8 | 53 | 20 | 77 | 71 | 74 | 2 | 810.448.1 | 132 |

## Pg 90° fitting, male, nickel plated brass




| THREAD PG | SEALTITE SIZE (INCH) | MIN. INTERNAL BORE (MM) | DIMENSIONS IN MM | | | | | STANDARD PACKAGE | ARTICLE NUMBER | WEIGHT (KG/100) |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | A | B | C | D | E | | | |
| Pg 11 | 5/16" | 8,3 | 32 | 12 | 26 | 42 | 22 | 10 | 810.912.1* | 9,3 |
| Pg 13,5 | 5/16" | 8,3 | 32 | 12 | 26 | 42 | 22 | 10 | 810.914.1* | 9,3 |
| Pg 11 | 3/8" | 10,2 | 32 | 12 | 26 | 42 | 22 | 10 | 810.911.1 | 8,9 |
| Pg 13,5 | 3/8" | 10,2 | 32 | 12 | 26 | 42 | 22 | 10 | 810.913.1 | 8,9 |
| Pg 16 | 1/2" | 13,9 | 36 | 13 | 29 | 43 | 27 | 10 | 810.916.1 | 15,3 |
| Pg 21 | 3/4" | 18,5 | 43 | 15 | 35 | 48 | 33 | 5 | 810.921.1 | 21,6 |
| Pg 29 | 1" | 23,8 | 48 | 15 | 45 | 59 | 42 | 5 | 810.929.1 | 35,3 |
| Pg 36 | 1.1/4" | 31,8 | 57 | 16 | 54 | 68 | 51 | 2 | 810.936.1 | 62,5 |
| Pg 42 | 1.1/2" | 36,8 | 63 | 18 | 63 | 78 | 60 | 2 | 810.942.1 | 88,1 |
| Pg 48 | 2" | 47,8 | 74 | 20 | 77 | 96 | 74 | 2 | 810.948.1 | 141,9 |

* Sizes 1/4" and 5/16" do not have UL / CSA approval.



DOWNLOADED FROM WWW.SCATTS.CO.UK

DOWNLOADED FROM WWW.SCATTS.CO.UK

# STANDARD FITTINGS, IP 67, NICKEL PLATED BRASS




## Pg cable-hose fitting, male, nickel plated brass

| THREAD PG | SEALTITE SIZE (INCH) | CLAMPING RANGE (MM) | DIMENSIONS IN MM | | | | | STANDARD PACKAGE | ARTICLE NUMBER | WEIGHT (KG/100) |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | A | B | C | E | F | | | |
| Pg 9 | 5/16" | 4 - 8 | 55 | 10 | 26 | 24 | 17 | 10 | 810.709.1 | 8,2 |
| Pg 9 | 3/8" | 5 - 8 | 55 | 10 | 26 | 24 | 20 | 10 | 810.712.1 | 7,8 |
| Pg 11 | 3/8" | 5 - 10 | 55 | 10 | 26 | 24 | 20 | 10 | 810.711.1 | 9,5 |
| Pg 13,5 | 1/2" | 6 - 12 | 57 | 10 | 29 | 27 | 22 | 10 | 810.715.1 | 9,7 |
| Pg 16 | 1/2" | 10 - 13,9 | 60 | 10 | 29 | 27 | 24 | 10 | 810.716.1 | 11,7 |
| Pg 21 | 3/4" | 13 - 18 | 67 | 12 | 35 | 33 | 30 | 5 | 810.721.1 | 19,6 |
| Pg 29 | 1" | 18 - 23,8 | 80 | 12 | 45 | 43 | 40 | 5 | 810.729.1 | 35,4 |




## Pg, EMC cable-hose fitting, male, nickel plated brass

| THREAD PG | SEALTITE SIZE (INCH) | CLAMPING RANGE (MM) | DIMENSIONS IN MM | | | | | STANDARD PACKAGE | ARTICLE NUMBER | WEIGHT (KG/100) |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | A | B | C | E | F | | | |
| Pg 9 | 5/16" | 4 - 8 | 55 | 10 | 26 | 24 | 17 | 10 | 810.609.1 | 8,2 |
| Pg 9 | 3/8" | 5 - 8 | 55 | 10 | 26 | 24 | 20 | 10 | 810.612.1 | 7,8 |
| Pg 11 | 3/8" | 5 - 10 | 55 | 10 | 26 | 24 | 20 | 10 | 810.611.1 | 9,5 |
| Pg 13,5 | 1/2" | 6 - 12 | 57 | 10 | 29 | 27 | 22 | 10 | 810.615.1 | 9,7 |
| Pg 16 | 1/2" | 10 - 13,9 | 60 | 10 | 29 | 27 | 24 | 10 | 810.616.1 | 11,7 |
| Pg 21 | 3/4" | 13 - 18 | 67 | 12 | 35 | 33 | 30 | 5 | 810.621.1 | 19,6 |
| Pg 29 | 1" | 18 - 23,8 | 80 | 12 | 45 | 43 | 40 | 5 | 810.629.1 | 35,4 |




## NPT straight fitting, male, nickel plated brass

| THREAD NPT | SEALTITE SIZE (INCH) | MIN. INTERNAL BORE (MM) | DIMENSIONS IN MM | | | | | STANDARD PACKAGE | ARTICLE NUMBER | WEIGHT (KG/100) |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | A | B | C | D | E | | | |
| 1/2" NPT | 5/16" | 8,3 | 35 | 12 | 26 | - | 24 | 10 | 814.011.1* | 6 |
| 1/2" NPT | 3/8" | 10,2 | 35 | 12 | 26 | - | 24 | 10 | 814.012.1 | 5,6 |
| 1/2" NPT | 1/2" | 13,9 | 37 | 13 | 29 | - | 27 | 10 | 814.016.1 | 6,2 |
| 3/4" NPT | 3/4" | 18,5 | 40 | 15 | 35 | - | 33 | 5 | 814.020.1 | 8,9 |
| 1" NPT | 1" | 23,8 | 46 | 15 | 45 | - | 43 | 5 | 814.026.1 | 25 |
| 1.1/4" NPT | 1.1/4" | 31,8 | 52 | 16 | 54 | - | 52 | 2 | 814.035.1 | 40 |
| 1.1/2" NPT | 1.1/2" | 36,8 | 56 | 18 | 63 | - | 60 | 2 | 814.040.1 | 43,8 |
| 2" NPT | 2" | 47,8 | 66 | 20 | 77 | - | 74 | 2 | 814.050.1 | 73,5 |

* Sizes 1/4" and 5/16" do not have UL / CSA approval.





DOWNLOADED FROM WWW.SCATTS.CO.UK

DOWNLOADED FROM WWW.SCATTS.CO.UK

## STANDARD FITTINGS, IP 67, NICKEL PLATED BRASS




### NPT straight fitting, female, nickel plated brass

| THREAD NPT | SEALTITE SIZE (INCH) | MIN. INTERNAL BORE (MM) | DIMENSIONS IN MM | | | | | STANDARD PACKAGE | ARTICLE NUMBER | WEIGHT (KG/100) |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | A | B | C | D | E | | | |
| 1/2" NPT | 5/16" | 8,3 | 37 | 13 | 26 | - | 24 | 10 | 814.311.1* | 5,7 |
| 1/2" NPT | 3/8" | 10,2 | 37 | 13 | 26 | - | 24 | 10 | 814.312.1 | 5,3 |
| 1/2" NPT | 1/2" | 13,9 | 37 | 13 | 29 | - | 27 | 10 | 814.316.1 | 6,2 |
| 3/4" NPT | 3/4" | 18,5 | 40 | 15 | 35 | - | 33 | 5 | 814.320.1 | 9 |
| 1" NPT | 1" | 23,8 | 46 | 15 | 45 | - | 43 | 5 | 814.326.1 | 20,7 |
| 1.1/4" NPT | 1.1/4" | 31,8 | 52 | 16 | 54 | - | 52 | 2 | 814.335.1 | 29,3 |
| 1.1/2" NPT | 1.1/2" | 36,8 | 56 | 18 | 63 | - | 60 | 2 | 814.340.1 | 43,8 |
| 2" NPT | 2" | 47,8 | 66 | 20 | 77 | - | 74 | 2 | 814.350.1 | 73,3 |




### NPT 45° fitting, male, nickel plated brass

| THREAD NPT | SEALTITE SIZE (INCH) | MIN. INTERNAL BORE (MM) | DIMENSIONS IN MM | | | | | STANDARD PACKAGE | ARTICLE NUMBER | WEIGHT (KG/100) |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | A | B | C | D | E | | | |
| 1/2" NPT | 5/16" | 8,3 | 23 | 12 | 26 | 33 | 22 | 10 | 814.411.1* | 8,3 |
| 1/2" NPT | 3/8" | 10,2 | 23 | 12 | 26 | 33 | 22 | 10 | 814.412.1 | 7,9 |
| 1/2" NPT | 1/2" | 13,9 | 25 | 13 | 29 | 33 | 27 | 10 | 814.416.1 | 10,7 |
| 3/4" NPT | 3/4" | 18,5 | 30 | 15 | 35 | 36 | 33 | 5 | 814.420.1 | 15,7 |
| 1" NPT | 1" | 23,8 | 34 | 15 | 45 | 46 | 42 | 5 | 814.426.1 | 31,8 |
| 1.1/4" NPT | 1.1/4" | 31,8 | 39 | 16 | 54 | 54 | 51 | 2 | 814.435.1 | 54,2 |
| 1.1/2" NPT | 1.1/2" | 36,8 | 45 | 18 | 63 | 59 | 60 | 2 | 814.440.1 | 78,5 |
| 2" NPT | 2" | 47,8 | 53 | 20 | 77 | 71 | 74 | 2 | 814.450.1 | 132 |




### NPT 90° fitting, male, nickel plated brass

| THREAD NPT | SEALTITE SIZE (INCH) | MIN. INTERNAL BORE (MM) | DIMENSIONS IN MM | | | | | STANDARD PACKAGE | ARTICLE NUMBER | WEIGHT (KG/100) |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | A | B | C | D | E | | | |
| 1/2" NPT | 5/16" | 8,3 | 32 | 12 | 26 | 42 | 22 | 10 | 814.911.1* | 13,7 |
| 1/2" NPT | 3/8" | 10,2 | 32 | 12 | 26 | 42 | 22 | 10 | 814.912.1 | 13,3 |
| 1/2" NPT | 1/2" | 13,9 | 36 | 13 | 29 | 43 | 27 | 10 | 814.916.1 | 14,6 |
| 3/4" NPT | 3/4" | 18,5 | 43 | 15 | 35 | 48 | 33 | 5 | 814.920.1 | 22 |
| 1" NPT | 1" | 23,8 | 48 | 15 | 45 | 59 | 42 | 5 | 814.926.1 | 31,7 |
| 1.1/4" NPT | 1.1/4" | 31,8 | 57 | 16 | 54 | 68 | 51 | 2 | 814.935.1 | 62,5 |
| 1.1/2" NPT | 1.1/2" | 36,8 | 63 | 18 | 63 | 78 | 60 | 2 | 814.940.1 | 89,1 |
| 2" NPT | 2" | 47,8 | 74 | 20 | 77 | 96 | 74 | 2 | 814.950.1 | 141,9 |



DOWNLOADED FROM WWW.SCATTS.CO.UK

DOWNLOADED FROM WWW.SCATTS.CO.UK



## STANDARD FITTINGS, IP 67, NICKEL PLATED BRASS




### NPT cable-hose fitting, male, nickel plated brass

| THREAD NPT | SEALTITE SIZE (INCH) | CLAMPING RANGE (MM) | DIMENSIONS IN MM | | | | | STANDARD PACKAGE | ARTICLE NUMBER | WEIGHT (KG/100) |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | A | B | C | E | F | | | |
| 3/8" NPT | 5/16" | 4 - 8 | 60 | 15 | 26 | 24 | 17 | 10 | 814.709.1 | 8,2 |
| 3/8" NPT | 3/8" | 4 - 8 | 60 | 15 | 26 | 24 | 17 | 10 | 814.710.1 | 7,8 |
| 1/2" NPT | 3/8" | 6 - 10,2 | 57 | 13 | 26 | 24 | 22 | 10 | 814.712.1 | 11,7 |
| 1/2" NPT | 1/2" | 6 - 12 | 59 | 13 | 29 | 27 | 22 | 10 | 814.715.1 | 11,7 |
| 3/4" NPT | 3/4" | 13 - 18 | 68 | 13 | 35 | 33 | 30 | 5 | 814.721.1 | 19,6 |

### Grounding ferrule, zinc plated steel

| THREAD | SEALTITE SIZE (INCH) | MIN. INTERNAL BORE (MM) | DIMENSIONS IN MM | | | | | STANDARD PACKAGE | ARTICLE NUMBER | WEIGHT (KG/100) |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | A | B | C | D | E | | | |
| - | 3/8" | 10,2 | - | - | - | - | - | 10 | 815.011.0 | 0,4 |
| - | 1/2" | 13,9 | - | - | - | - | - | 10 | 815.016.0 | 0,6 |
| - | 3/4" | 18,5 | - | - | - | - | - | 5 | 815.021.0 | 0,8 |
| - | 1" | 23,8 | - | - | - | - | - | 5 | 815.029.0 | 1,4 |

### Grounding ferrule, nickel plated brass

| THREAD | SEALTITE SIZE (INCH) | MIN. INTERNAL BORE (MM) | DIMENSIONS IN MM | | | | | STANDARD PACKAGE | ARTICLE NUMBER | WEIGHT (KG/100) |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | A | B | C | D | E | | | |
| - | 1/4" | 5,2 | - | - | - | - | - | 10 | 815.006.0 | 0,4 |
| - | 5/16" | 8,3 | - | - | - | - | - | 10 | 815.010.0 | 0,8 |
| - | 3/8" | 10,2 | - | - | - | - | - | 10 | 815.011.3 | 0,6 |
| - | 1/2" | 13,9 | - | - | - | - | - | 10 | 815.016.3 | 0,8 |
| - | 3/4" | 18,5 | - | - | - | - | - | 5 | 815.021.3 | 1,4 |
| - | 1" | 23,8 | - | - | - | - | - | 5 | 815.029.3 | 2,8 |
| - | 1.1/4" | 31,8 | - | - | - | - | - | 2 | 815.036.3 | 6 |
| - | 1.1/2" | 36,8 | - | - | - | - | - | 2 | 815.042.3 | 6,8 |
| - | 2" | 47,8 | - | - | - | - | - | 2 | 815.048.3 | 8,8 |



DOWNLOADED FROM WWW.SCATTS.CO.UK

SCATTERGOOD & JOHNSON LTD
ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS
Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.

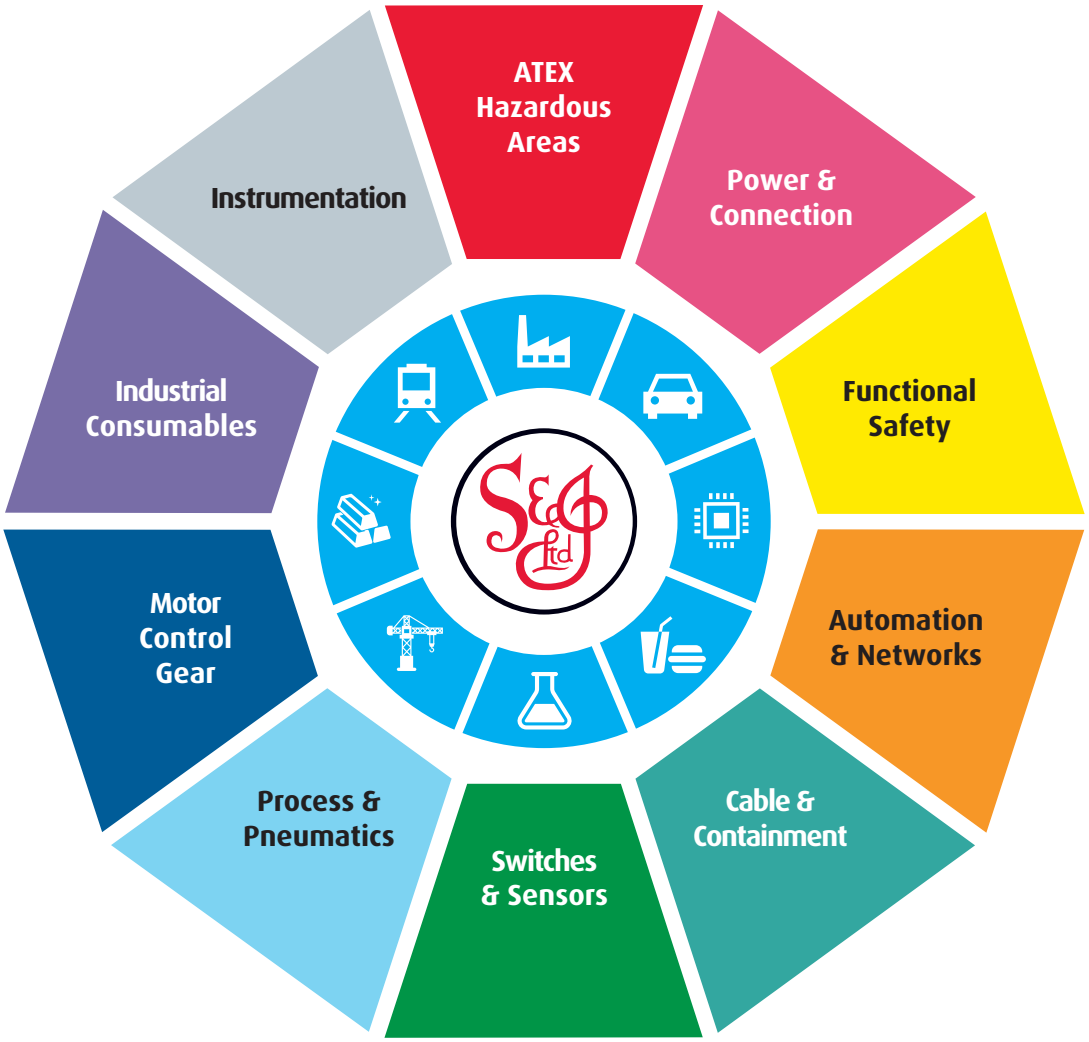


Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

**www.scatts.co.uk**