

Control & Monitoring Relays

Thermostat Relay MXT-10



DESCRIPTION

A thermostat relay for the monitoring or control of temperature in the range -50 to 300°C. The probe is a standard Pt100, either 2 or 3 wire. LED indication of a non-functional probe and relay activated.

When the temperature rises and reaches the determined setpoint, plus the hysteresis, which is adjusted on the front, the relay de-energises. As the temperature falls and passes the setpoint, minus the hysteresis, the relay re-energises. By strapping 2 terminals, the relay can be inverted allowing the thermostat relay to be used for the control of heating as well as cooling systems.


The relay has two analogue 0-10VDC outputs, one for measured temperature and the other for the setpoint.

Features

- 2/3 wire Pt100 input (DIN43760).
- Monitoring or control of temperature - 50 to 300°C in 5 ranges in one version.
- Adjustable Setpoint.
- Hysteresis adjustable $\pm 0,5-20\%$.
- Inversion of the relay contact function - heating/cooling control.
- LED indication of probe failure.
- Outputs.
- SPDT.
- Analogue 0 - 10VDC with ref. to measured temperature.
- Analogue 0 - 10VDC with ref. to setpoint.
- Supply voltage 24VDC, 24/115VAC or 24/230VAC.

VERSIONS/ORDERING CODES


Type:
Thermostat relay




Supply voltage
24V DC
115V AC / 24V AC
230V AC / 24V AC

OPERATION

Temperature monitoring

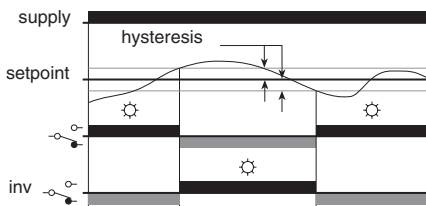

MECHANICAL DIMENSIONS

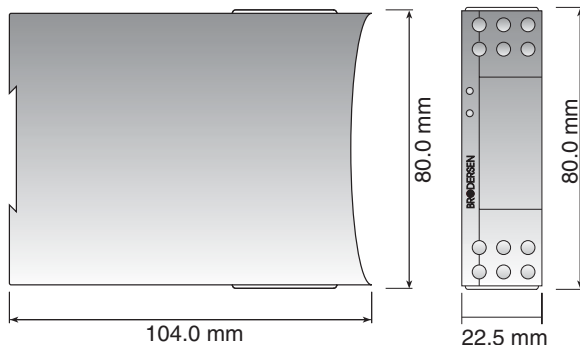

TECHNICAL DATA

Input: Pt-100 probe(DIN 43760), 3 conductors with compensation for cable resistance.

Temperature range: -50-50°C
0-50°C
0-100°C
100-200°C
200-300°C

Temperature drift: Max. 0,05%/°C

Setting accuracy: Typically ± 10%

Hysteresis: ±0,5-20% of chosen area, adjustable

Response time: time constant $\tau = 0,2s$, Worst case of response time max. $5 \times \tau$

Output: SPDT relay: Contact material, AgNi 0,15 with hardened gold plating Au.
Max. load AC: 8A/240V AC (cos $\varphi=1$)
Max. breaking capacity 2000VA. Inductive load. See fig. 1.
Max. load DC: 8A/24V DC
Max. breaking capacity 50-270W. See fig. 2.

Max. in rush current: 15A(max. 4s/duty cycle less than 10%).

Min. in rush current: 10mA, 24V DC

Frequency: Max. 1000 operations pr. time.

Life span: Mech. Min. 3×10^7 operations
Elect. Min. 1×10^5 operations with full load.

Delay: <20ms.

Analogue outputs: 0-10V DC, refers to setpoint and measured temperature in chosen areas.
 $I_{max} = 2mA / R_{load} > 5 k\Omega$.
Setpoint: ±1%
Measured value ±5%

Supply voltage: Versions: 924=24V DC (20,4-27,6)V DC
115=24/115V AC (20,4-27,6 /98-132)V AC
230=24/230V AC (20,4-27,6/196-264)V AC
45-65Hz.

Net frequency: AC; 3VA
Consumption: DC; 2W

General data: Ambient temperature:-20 to 55°C.
Storage temperature:-40 to 80°C.
Mounting: 35mm DIN-rail (EN50022).
Terminals: Screw terminals with dual compartment. Terminal screws are combined crosshead/slotted.Up to $2 \times 2,5mm^2$ wire ($2 \times 1,5mm^2$ inc. ferrule). Recommended torque, 0,5 Nm, max. 0,7 Nm (VDE0609-1). Terminal identification in accordance with DIN46199/EN50005.


Indicators: Green LED = operating voltage.
Red LED (constant)= relay switched on.
Red LED (flashing)= non-functional probe.

Protection: IP20.

Electric isolation: 3,75kVAC (1 min.) between input, supply and relay output (EN60950).
Note: No galvanic isolation between input and analogue output.
Noryl (GE), UL94V1.
Terminal block:Noryl (GE), UL94V0.

Housing: 180 g.

WIRING DIAGRAM

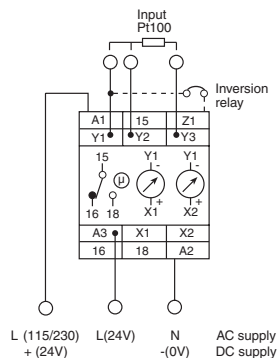

Coding: Relay inverter, Jumper Y1-Z1

Analogue output 0-10V DC
Setpoint: X1= (+) V
Y1= (-) 0

Measured temperature: X2=(+) V
Y1=(-) 0

SPECIFICATIONS:

- MXT-10 is designed and developed with regard to relevant specifications:
- EN60204-1 / VDE0113 electrical material on machines.
 - VDE0110 / IEC664 Isolation specifications/creepage and clearance distances.
 - Electrical safety in accordance with EN61010.
 - IEC414 Safety regulations for control and monitoring equipment.
 - EMC: Emission EN50081-1
Immunity EN50082-2
 - Humidity in accordance with IEC68-2-3; RH=95%, 40°C.
 - Vibration in accordance with IEC68-2-6;
 - Shock when mounted, in accordance with IEC68-2-27.

MXT-10 is CE-marked in accordance with EMC-and the Low Voltage Directive.

OUTPUT LOAD DIAGRAMS

Fig. 1





Fig. 2



INTRO...
MCP-10
MCU-10 DV/AV
MCU-10 DC/AC
MCU-10 P/N/T
MCU-10 J/K/S/R
MCU-10 U
MXV-10
MXV-20
MXC-10
MXC-20
MXC-30
MXV-30
MXP-10
MXP-20
MXL-10
MXT-10



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk