




## KDE SERIES

## KDE SERIES DRAIN BREATHER



KDES60M20

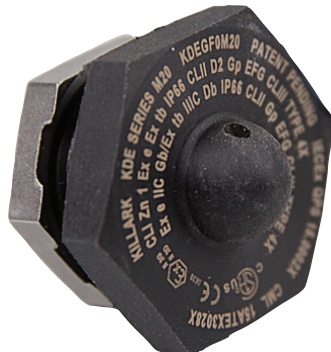

KDEGF0M20

Class I, Div. 2, Groups A, B, C, D  
 Class I, Zone 1 & 2, Ex e / AEx e IIC,  
 A/Ex tb  
 Class II, Div. 1① & 2, Groups E, F, G  
 Class III, Ambient Temperature Range  
 -55°C to +80°C  
 Enclosure Type 3, 4 & 4X② IP66



SP US 2714851

II 2 G D CE 0518

Ex e IIC Gb

Ex tb IIIC Db IP66

Ta = -55°C to + 80°C

IECEx 15.0154X

CML 15ATEX3028X

IECEx QPS 15.0002X

PATENT PENDING

## FEATURES-SPECIFICATIONS

## Applications

When installed in the bottom of a thin wall enclosure the KDE allows water from condensation to drain continuously out of the enclosure. The drain breathers are installed through clearance holes and held secured with an internal locknut. The silicone external o ring makes a hose down tight seal.

## Features


- Silicone o-ring supplied as standard and suitable for use in a -55°C to +80°C temperature range.
- Variety of thread sizes 1/2 & 3/4 NPT, 1/2 & 3/4 NPSM, M20 & M25.
- Available in 300 series stainless steel, 316 stainless steel, aluminum and 30% glass filled nylon.
- Internal 316 stainless steel locknut supplied as standard. When tighten to the proper torque the joint makes a hose down tight seal for type 4, 4X & IP66 application.

## Materials

- 303 or 304 stainless steel, 316 stainless steel, brass, aluminum or 30% glass filled nylon.
- Internal locknut 316 stainless steel.
- High temp silicone o-ring

| MATERIAL / CATALOG NUMBER |                        |           |                     |           |                     |
|---------------------------|------------------------|-----------|---------------------|-----------|---------------------|
| ENTRY THREAD SIZE & TYPE  | GLASS FILLED PA6 NYLON | ALUMINUM  | 316 STAINLESS STEEL | BRASS     | NICKEL PLATED BRASS |
| M20                       | KDEGF0M20              | KDEAL0M20 | KDES60M20           | KDEBR0M20 | KDEBR1M20           |
| M25                       | KDEGF0M25              | KDEAL0M25 | KDES60M25           | KDEBR0M25 | KDEBR1M25           |
| 1/2" NPT                  | KDEGF0050              | KDEAL0050 | KDES60050           | KDEBR0050 | KDEBR1050           |
| 3/4" NPT                  | KDEGF0075              | KDEAL0075 | KDES60075           | KDEBR0075 | KDEBR1075           |

Note: Other thread forms and materials available upon request.

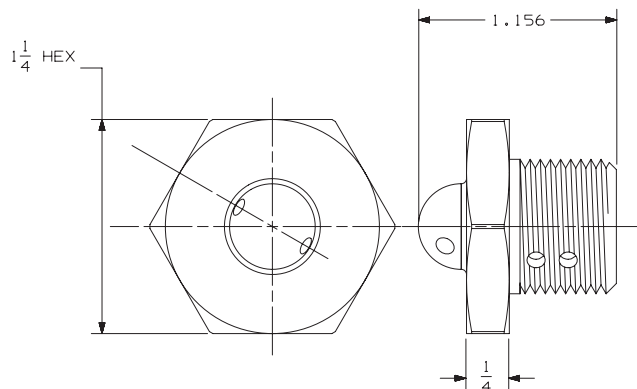

① Class II Div. 1 Canada only, Div. 2 in the U.S.

② Type 4X in 316 & 304 SS, Aluminum & Nylon materials only.



# SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS


At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.

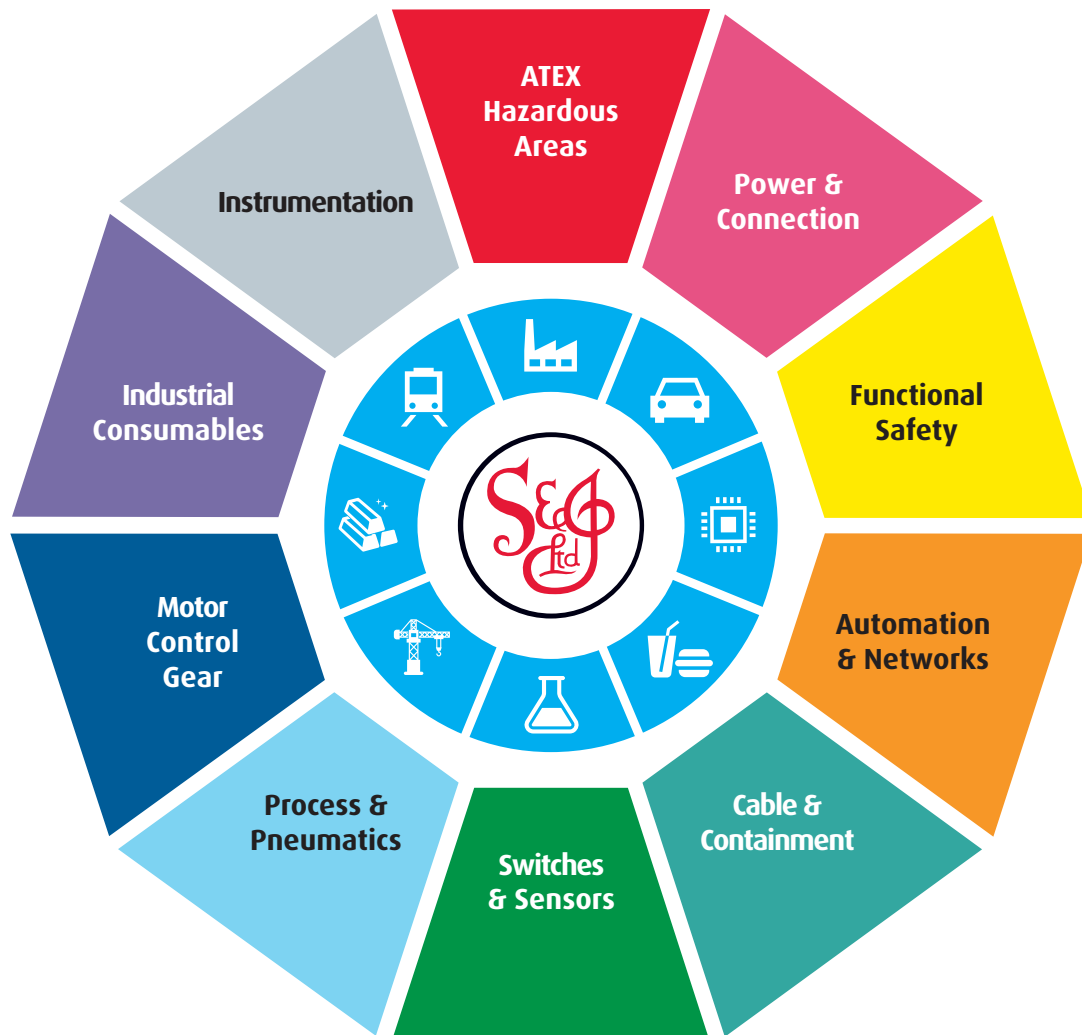

Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

# [www.scatts.co.uk](http://www.scatts.co.uk)