

SPECIFICATIONS

FLUID : Air or neutral gas, filtered, lubricated or not
 PORTS : G 1/4
 PRESSURE : 0 to 10 bar
 TEMPERATURE : -25°C to +60°C
 FLOW (Qv at 6 bar) : 860 l/min (ANR)

CONSTRUCTION

Environmentally-protected construction
 Spool valve
 Body: treated aluminium
 Internal parts: zinc diecasting, steel, stainless steel, acetal (POM)
 Seals: NBR (nitrile) and PUR (polyurethane)



1 = Pressure
 2,4 = Outlets
 3,5 = Exhausts

CHOICE OF EQUIPMENT

[Configurator - CAD Files](#)

Type	Pilot	Return	Operating effort (daN)	CODES
<p>3/2</p>	Roller	Spring	4,8	55102084
<p>5/2</p>	Roller	Spring	4,8	55102087


Note: do not connect the pressure supply to the exhaust port 3. For a "distributing" function or use in NO function, contact us.

DIMENSIONS AND WEIGHTS
ROLLER

[Configurator - CAD Files](#)


3/2

Weight: 0,250 kg

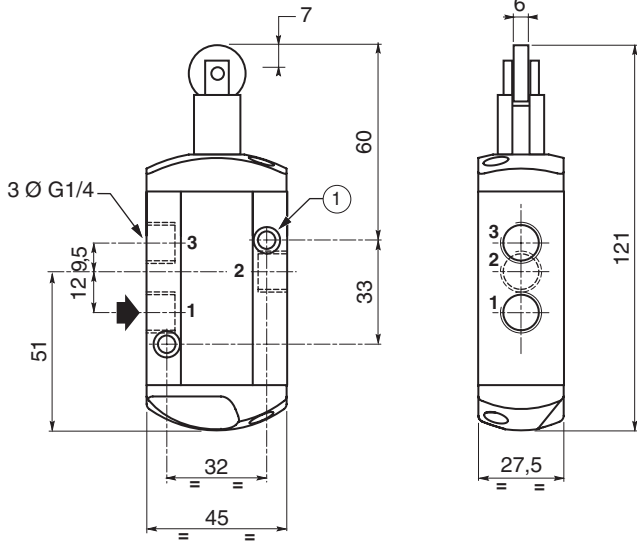

5/2


Weight: 0,285 kg

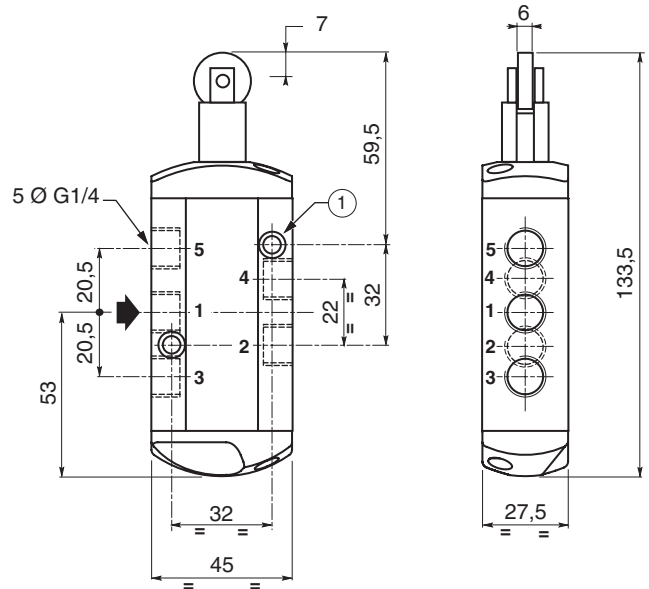

① 2 fixing holes: Ø 5,3 - counterbore : Ø 9, dept 5

Cam angles

Maximum speed: 0,3 m/s

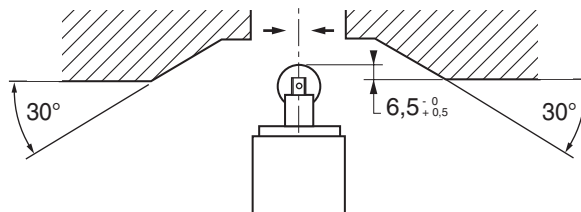



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk