

Type CB RX stopping plugs

Type CF tamper-proof stopping plugs

Type CB



Type CF


CE Ex IECEx SPC EAC Ex INMETRO Ex NEPSI CCC

CSA: CII Zn 1 AEx db IIC Gb, Ex db IIC Gb (see certificate for threadforms & material details)


Thread	Allen/hex keyaperture A/F (mm)	Thread length L (mm)
M16	6.0	17.0
M20	10.0	17.0
M25	10.0	17.0
M32	10.0	17.0
M40	19.0	17.0
M50	19.0	17.0
M63	19.0	17.0
M75	19.0	17.0

Compliance standards

Type CB



Type CF



Certificate details

NEPSI: GYJ18.1470X

Temperature

Ingress protection (IP)

IP66/68 (according to manufacturer's instructions).

Stopping plugs - type CK and type CY

Technical specification

The comprehensive Raxton range of stopping plugs are designed to close off any unused entries in electrical equipment, whilst maintaining existing certification and ingress protection.

Type CK hex head stopping plugs

Type CK hex head stopping plugs are inserted from the outside of the equipment and tightened by means of a spanner.

Type CY hollow hex head stopping plugs

Type CY hollow hex head stopping plugs are a hollow version of the type CK hex head plug. These are lighter and have Ex d/ Ex e certification. The type CY plug is not suitable for mining applications.

All Raxton stopping plugs are marked with the appropriate approval numbers and size.



Type CK



Type CY

Certifications and compliances



Code of protection categories

ATEX: I/II 2 GD Ex db I/II C Mb/Gb, Ex eb I/II C Mb/Gb (Gr I not for type CY)
IECEX/ INMETRO: Ex tb IIIC Db IP66

EAC: Ex d I/II C Mb/Gb, Ex e I/II C Mb/Gb, Ex tb IIIC Db IP66 (Group I not for Type CY)

CSA: CII Zn 1 AEx db IIC Gb, Ex db IIC Gb (see certificate for threadforms & material details)

NEPSI: Ex d IIC, Ex e IIC, Ex tD

Thread	Overall length A A/F (mm)	Thread length L (mm)	Head depth T (mm)
M12	14.0	15.0	3.5
M16	19.0	15.0	4.0
M20	24.0	15.0	4.0
M25	27.9	15.0	4.0
M32	37.6	15.0	4.0
M40	47.2	15.0	5.0
M50	55.9	15.0	6.0
M63	70.0	15.0	7.0
M75	80.0	15.0	8.0
M80	90.0	20.0	9.0
M90	95.0	20.0	10.0
M100	105.0	20.0	11.0

Other sizes /threads are available upon request.

Compliance standards

ATEX / EAC: EN 60079-0, EN 60079-1, EN 60079-7, EN 60079-31
IECEX: IEC 60079-0, IEC 60079-1, IEC 60079-7, IEC 60079-31

CSA: CSA-C22.2 No. 60079-0, CSA-C22.2 No. 60079-1
 ANSI/UL 60079-0, ANSI/UL 60079-1 (not NPT threads for CY)

INMETRO: ABNT NBR IEC 60079-0, ABNT NBR IEC 60079-1, ABNT NBR IEC 60079-7, ABNT NBR IEC 60079-31

NEPSI: GB 3836.1, GB 3836.2, GB 3836.3, GB 12476.1, GB 12476.5

Certificate details


ATEX: ITS16ATEX101335X
IECEX: IECEx ITS16.0012X
CSA: 200455-1003277
EAC: TC RUC-G B.MK062.B.06226
INMETRO: NCC 18.0133X
NEPSI: GYJ18.1470X

Temperature

-60°C to +200°C ; depending on O-ring or sealing washer used

Ingress protection (IP)

IP66/68 (according to manufacturer's instructions).

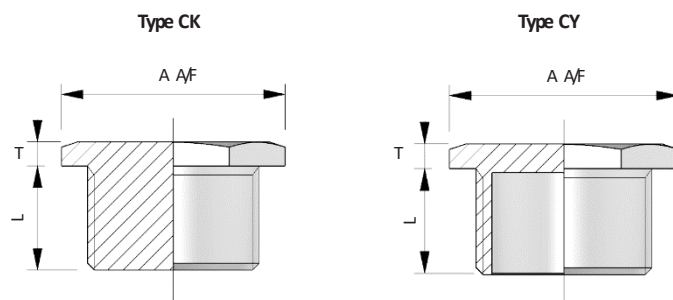

Stopping plugs - type CQ

Technical specification

The comprehensive Raxton range of stopping plugs are designed to close off any unused entries in electrical equipment, whilst maintaining existing certification and ingress protection.

Type CQ dome head stopping plugs

Type CQ dome head stopping plugs can be offered as an alternative to the hex head stopping plug and are inserted from the outside of the equipment and tightened by means of an Allen or hex key.

Type CQ dome head stopping plugs are available as metallic Ex d/Ex e or nylon Ex e versions. The nylon version is supplied with an undercut and EPDM O-ring as standard.

All Raxton stopping plugs are marked with the appropriate approval numbers and size.



Type CQ



Type CQ

Type CQ plugs - certifications and compliances



Code of protection categories

ATEX: I/II 2 GD, Ex db I/IIC Mb/Gb, Ex eb I/IIC Mb/Gb (Nylon not Gr I)
Ex tb IIIC Db IP66

**IECEx /
INMETRO /**

EAC: Ex d I/IIC Mb/Gb, Ex e I/IIC Mb/Gb, Ex tb IIIC Db IP66

**CSA (not
for Nylon)** CII Zn 1 AEx db IIC Gb, Ex db IIC Gb (see certificate for
threadforms & material details)

NEPSI: Ex d II C Gb, Ex e II C Gb, Ex tD

Compliance standards

ATEX / EAC: EN 60079-0, EN 60079-1, EN 60079-7, EN 60079-31
INMETRO: ABNT NBR IEC 60079-0, ABNT NBR IEC 60079-1, ABNT NBR IEC
60079-7, ABNT NBR IEC 60079-31

NEPSI: GB 3836.1, GB 3836.2, GB 3836.3, GB 12476.1, GB 12476.5

IECEx: IEC 60079-0, IEC 60079-1, IEC 60079-7, IEC 60079-31

**CSA (not
for Nylon)** CSA-C22.2 No. 60079-0, CSA-C22.2 No. 60079-1
ANSI/UL 60079-0, ANSI/UL 60079-1

Certificate details

ATEX: ITS16ATEX101335X

IECEx: IECEx ITS16.0012X

CSA 200455-1003277 (brass and stainless only)

NEPSI: GYJ18.1470X

EAC: TC RUC-G B.MIO62.B.06226

INMETRO: NCC 18.0133X

* Ex db I Mb, Ex eb I Mb (except for aluminum & nylon)

Temperature


The item is classified as a component and therefore metallic products are not given an operating temperature range.

Ingress protection (IP):

IP66/68 (according to manufacturer's instructions)

Thread	F A/F + .3 - .0 (mm)	A Ø (mm)	Head depth T (mm)	Thread length L (mm)
M16	60	20.0	5.0	15.0
M20	100	25.0	5.0	15.0
M25	100	30.0	5.0	15.0
M32	100	38.0	5.0	15.0
M40	190	46.0	5.0	15.0
M50	190	57.0	5.0	15.0
M63	190	70.0	5.0	15.0
M75	190	82.0	5.0	15.0

Other sizes /threads are available upon request.

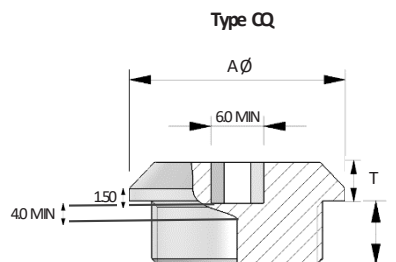

Stopping plugs – Product coding

DIGIT 1+2		CODE
Product	Description	
PLUGS	RX (External Accessible)	CB
	TAMPERPROOF (Internal Accessible)	CF
	HEX HEAD	CK
	HEX HEAD (Hollow)	CY
	DOME HEAD	CQ

DIGIT 3	CODE
MATERIAL	
BRASS	A
ALUMINUM	B
STEEL	C
STAINLESS STEEL	E
GLASS FILLED NYLON	M

DIGIT 8 (APPROVAL)	CODE
Exd/Exe	Y
Nylon (Exe only)	E
None	F

DIGIT 9 (Undercut)	CODE
Yes	U
None	X or Blank

DIGIT 10 (PLATING)	CODE
None	Blank
Nickel	N
Zinc	Z

Glass filled Nylon available in CQ type only

DIGIT 4+5 (Male thread)								DIGIT 6+7 (Female thread)						
THREAD REFERENCE TABLE														
ISOMETRIC		NPT		BSPT		BSPP		NPSM		PG		ET		
SIZE	CODE	SIZE	CODE	SIZE	CODE	SIZE	CODE	SIZE	CODE	SIZE	CODE	SIZE	CODE	
M12	04	½"	42	½"	52	½"	62	½"	72	PG7	20	⅝"	31	
M16	11	¾"	43	¾"	53	¾"	63	¾"	73	PG9	21	¾"	32	
M20	12	1"	44	1"	54	1"	64	1"	74	PG11	22	1"	33	
M25	13	2"	47	2"	57	2"	67	2"	77	PG21	25	2"	36	
M32	14	3"	49	3"	59	3"	69	3"	79	PG36	27	3"	38	
M40	15	4"	87	SPECIAL	50	SPECIAL	60	4"	70	PG48	29			
M50	16	SPECIAL	40					SPECIAL	70					
M63	17													
M75	18													
M80	80													
M90	81													
M100	82													
SPECIAL	10													

NOTE: Male thread is always quoted First (Digit 4+5) followed by the Female thread (Digit 6+7)
Other threads are available, please consult the sales department
Digit 8 Approval
Digit 9: U = Undercut Otherwise Blank or use X if Plating is required
Digit 10 (Plating) is Blank if no plating is required

EXAMPLES							
Product	Material	Male thread	Female thread	Approval	Undercut	Plating	
Plug	Brass	½" NPT	N/A	Exd/Exe	None	Nickel	Part Number
CQ	A	42	00	Y	X or Blank	N	CQA4200YXN
Plug	GF Nylon	M20	N/A	Exe	Yes	None	Part Number
CQ	M	12	00	E	U	Blank	CQM1200EU

NB : Necessary precautions should be taken for NPT CY and CK series in ExD applications



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS


At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.

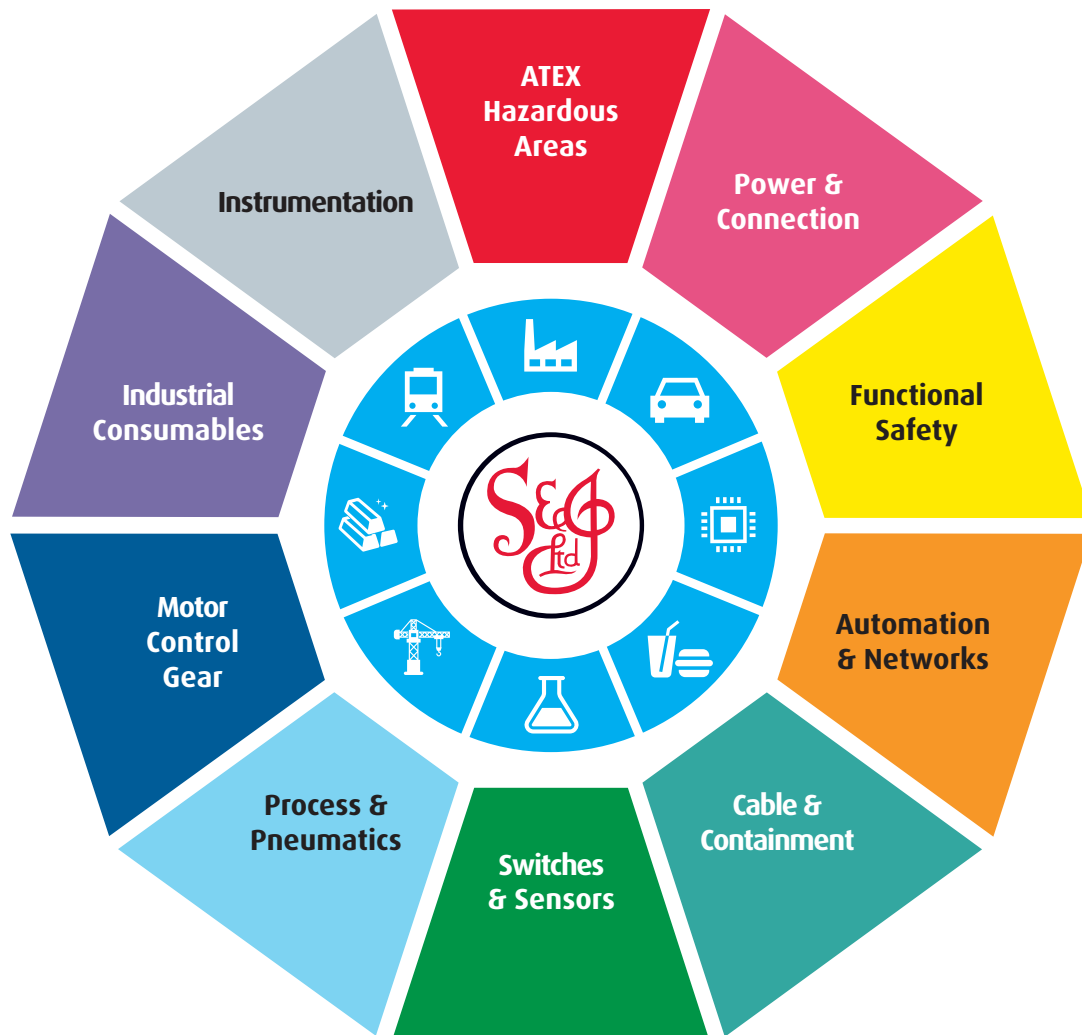

Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk