

# Flameproof (Exd/Exe) breather drains – BD-U Series

## Technical specification

Redapt BD-U series of Exd “Flameproof” and Exe “Increased Safety” breather drains has a primary function of effectively draining any water present within the enclosure.

Alongside draining water, it also allows air in the enclosure to breathe with the surrounding atmosphere, minimizing moisture build-up; preventing condensation and potential damage to sensitive electric/electronic equipment housed within.

Approved to the latest international standards, Redapt explosion-proof breather drains can be supplied with ATEX and IECEx hazardous area certificates.



Type BD-U

## Certifications and compliances



### Code of protection categories

**ATEX:** I M2, II 2 GD, Ex e I/IIC Mb Gb, Ex d I/IIB+H2 Mb Gb, Ex tb IIC Db

**IECEx:** Ex e I/IIC Mb/Gb, Ex d I/IIB+H2 Mb/Gb, Ex tb IIC Db

### Compliance standards

**ATEX:** EN 60079-0, EN 60079-1, EN 60079-7, EN 60079-31

**IECEx:** IEC 60079-0, IEC 60079-1, IEC 60079-7, IEC 60079-31


### Certificate details

**ATEX:** ITS16ATEX101338X

**IECEx:** IECEx ITS 16.0014X

**EAC:** RU C-GB.MO62.B.06227

**INMETRO:** NCC 18.0165 X

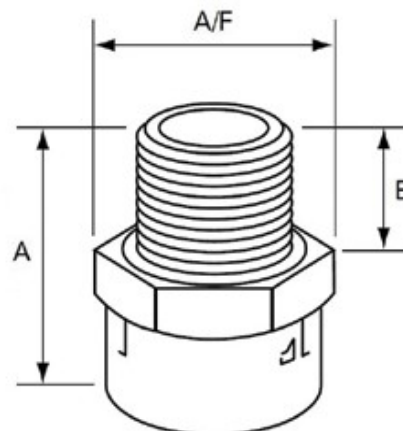

### Ingress protection (IP):

IP66 when fitted in accordance to manufacturer's instructions.

### Plating options

Electroless nickel  
Zinc  
Others on application

### Threadforms

Metric  
NPT

*Note: remove O-ring for NPT thread to thread engagement*

### Temperature

Temperature range dependent on O-ring used  
(supplied on metric only)

Nitrile: -30°C to +80°C

EPDM: -50°C to +100°C

Neoprene: -40°C to +80°C

Viton: -20°C to +180°C

Silicone: -60°C to +180°C (supplied as standard)

Fluorosilicone: -60°C to +130°C

*The maximum temperature is limited to +150°C for Group I applications.*

### Dimensions

Size	Hex A/F	Overall length (A)	Male thread length (B)
M20	27.00	31.00	16.00
M25	31.75	31.00	16.00
½" NPT	27.00	35.00	20.00
¾" NPT	31.75	35.00	20.00

# Flameproof (Exd/Exe) breather drains – Product coding

Product	DIGITS 1 & 2
Flameproof BREATHER DRAIN	<b>BD</b>

Certification	DIGIT 3
<b>U</b>	Exd I and IIB +H2 and Exe I and IIC

Material	DIGIT 4
<b>1</b>	Brass
<b>3</b>	Stainless steel

Plating	DIGIT 5
<b>0</b>	Unplated
<b>1</b>	Electroless nickel
<b>2</b>	Zinc

DIGITS 6 & 7
<b>Thread type</b>
<b>04</b> M20
<b>05</b> M25
<b>29</b> 1/2" NPT
<b>30</b> 3/4" NPT

DIGITS 8 & 9
<b>O-ring</b>
<b>D0</b> no O-ring
<b>D1</b> Silicone
<b>D2</b> Fluorosilicone
<b>D3</b> Viton
<b>D4</b> EPDM
<b>D5</b> Neoprene
<b>D6</b> Nitrile

## Example

Digits 1&2	Digit 3	Digit 4	Digit 5	Digits 6&7	Digits 8&9					
<b>BD</b>	-	<b>U</b>	-	<b>3</b>	-	<b>0</b>	-	<b>04</b>	-	<b>D1</b>
Breather drain	Exd I and IIC and Exe I and IIC	Stainless steel	Unplated	M20	Silicone O-ring					

# Thread dimension chart

## ISO metric

BS 3643 1.5mm pitch

Size	Major dia.	TPI
M12	11.97	16.93
M16	15.97	16.93
M20	19.97	16.93
M25	24.97	16.93
M32	31.97	16.93
M40	39.97	16.93
M50	49.97	16.93
M63	62.97	16.93
M75	74.97	16.93
2.0mm pitch		
M80	79.97	12.70
M85	84.97	12.70
M90	89.97	12.70
M100	99.97	12.70
M110	109.97	12.70
M120	119.97	12.70

## NPT

ANSI.ASME B1.20.1

Size	Pipe dia.	TPI
½"	21.34	14.00
¾"	26.67	14.00
1"	33.40	11.50
1¼"	42.16	11.50
1½"	48.26	11.50
2"	60.33	11.50
2½"	73.03	8.00
3"	88.90	8.00
3½"	101.60	8.00
4"	114.30	8.00

## PG

DIN 40430

Size	Major dia.	TPI
PG7	12.50	20.00
PG9	15.20	18.00
PG11	18.60	18.00
PG13.5	20.40	18.00
PG16	22.50	18.00
PG21	28.30	16.00
PG29	37.00	16.00
PG36	47.00	16.00
PG42	54.00	16.00
PG48	59.30	16.00

## Alternate ISO pipe thread designations

UK	BSP Parallel or Taper BS2279 (BS21)
Europe	G (Parallel) GK (Taper) R (Parallel) RK (Taper)
Japan	PF (Parallel) JISB 303
CIS	K mpy (Taper)

## BSP ISO pipe thread

ISO R/7; UNI 6125

Size	Pipe Dia.	TPI
⅝"	16.66	19.00
½"	20.96	14.00
¾"	26.44	14.00
1"	33.25	11.00
1¼"	41.91	11.00
1½"	47.80	11.00
2"	59.61	11.00
2½"	75.18	11.00
3"	87.88	11.00

## ET imperial conduit

BS31

Size	Major dia.	TPI
⅝"	15.88	18.00
¾"	19.05	16.00
1"	25.40	16.00
1¼"	31.75	16.00
1½"	38.10	14.00
2"	50.80	14.00
2½"	63.50	14.00
3"	76.20	14.00

## Thread dimension substitution chart

Metric	NPT (or NPS)	PG	BSP ISO Pipe	ET
M16	–	7, 9	–	⅝"
M20	½"	11, 13.5	½"	¾"
M25	¾"	16	¾"	1"
M32	1"	21	1"	1¼"
M40	1¼"	29	1¼"	1½"
M50	1½"	36	1½"	2"
M63	2"	42, 48	2"	2½"
M75	2½"	–	2½"	3"
M90 x 2.0	3"	–	3"	–
M100 x 2.0	3½"	–	–	–
M110 x 2.0	–	–	–	–
M120 x 2.0	–	–	–	–



# SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

# [www.scatts.co.uk](http://www.scatts.co.uk)