

Cable marker - UC-WMTB (44X15) - 0828376

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Cable marker, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: Assembly with cable binders, cable diameter: > 7 mm, lettering field size: 44 x 15 mm, Number of individual labels: 4

Your advantages

- ✓ The UC-WMTB ... UniCard labeling range includes markers that can be secured using standard cable binders
- ✓ For large-surface labeling of conductors and cables > 7 mm in diameter
- ✓ The markers, which are supplied in uniform sheets, can be labeled quickly and easily using the BLUEMARK LED
- ✓ Labeling service: Phoenix Contact can custom-label all UniCard markers according to your requirements
- ✓ The format automatically ensures printing with a high degree of positioning accuracy
- ✓ The sheets provide space for including function texts



Key Commercial Data

Packing unit	10 pc
Minimum order quantity	10 pc
GTIN	 4 046356 485401
GTIN	4046356485401
Weight per Piece (excluding packing)	9.430 g
Custom tariff number	39269097
Country of origin	Poland
Sales Key	BG2317

Technical data

Dimensions

Length (b)	60 mm
Width (a)	15 mm

Ambient conditions

Ambient temperature (operation)	-40 °C ... 120 °C
---------------------------------	-------------------

<https://www.phoenixcontact.com/gb/products/0828376>


Cable marker - UC-WMTB (44X15) - 0828376

Technical data

Ambient conditions

Recommended storage conditions	23 °C/50 % relative humidity. Storage in a dry and dark place in the original packaging is recommended.
--------------------------------	---

General

Color	white
Type	Card form
Components	free from silicone and halogen
Material	PA
Wipe resistance	DIN EN 61010-1 (VDE 0411-1)
Number of individual labels	4
Number of individual labels per row	1
Marking mounting type	Assembly with cable binders
Min. cross section	16 mm²

Standards and Regulations

Wipe resistance	DIN EN 61010-1 (VDE 0411-1)
Flammability rating according to UL 94	V2

Environmental Product Compliance

China RoHS	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"
------------	---

Classifications

eCl@ss

eCl@ss 10.0.1	27400401
eCl@ss 11.0	27281102
eCl@ss 4.0	27061700
eCl@ss 4.1	27061700
eCl@ss 5.0	27400400
eCl@ss 5.1	27400400
eCl@ss 6.0	27400400
eCl@ss 7.0	27400401
eCl@ss 9.0	27400401

ETIM

ETIM 2.0	EC000761
ETIM 3.0	EC000761
ETIM 4.0	EC001530
ETIM 5.0	EC001530
ETIM 6.0	EC001530
ETIM 7.0	EC001530

<https://www.phoenixcontact.com/gb/products/0828376>



Cable marker - UC-WMTB (44X15) - 0828376

Classifications

UNSPSC

UNSPSC 6.01	30211811
UNSPSC 7.0901	39121410
UNSPSC 11	39121410
UNSPSC 12.01	39121410
UNSPSC 13.2	39131504
UNSPSC 18.0	39131504
UNSPSC 19.0	39131504
UNSPSC 20.0	39131504
UNSPSC 21.0	39131504

Phoenix Contact 2021 © - all rights reserved
<http://www.phoenixcontact.com>



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS


At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.

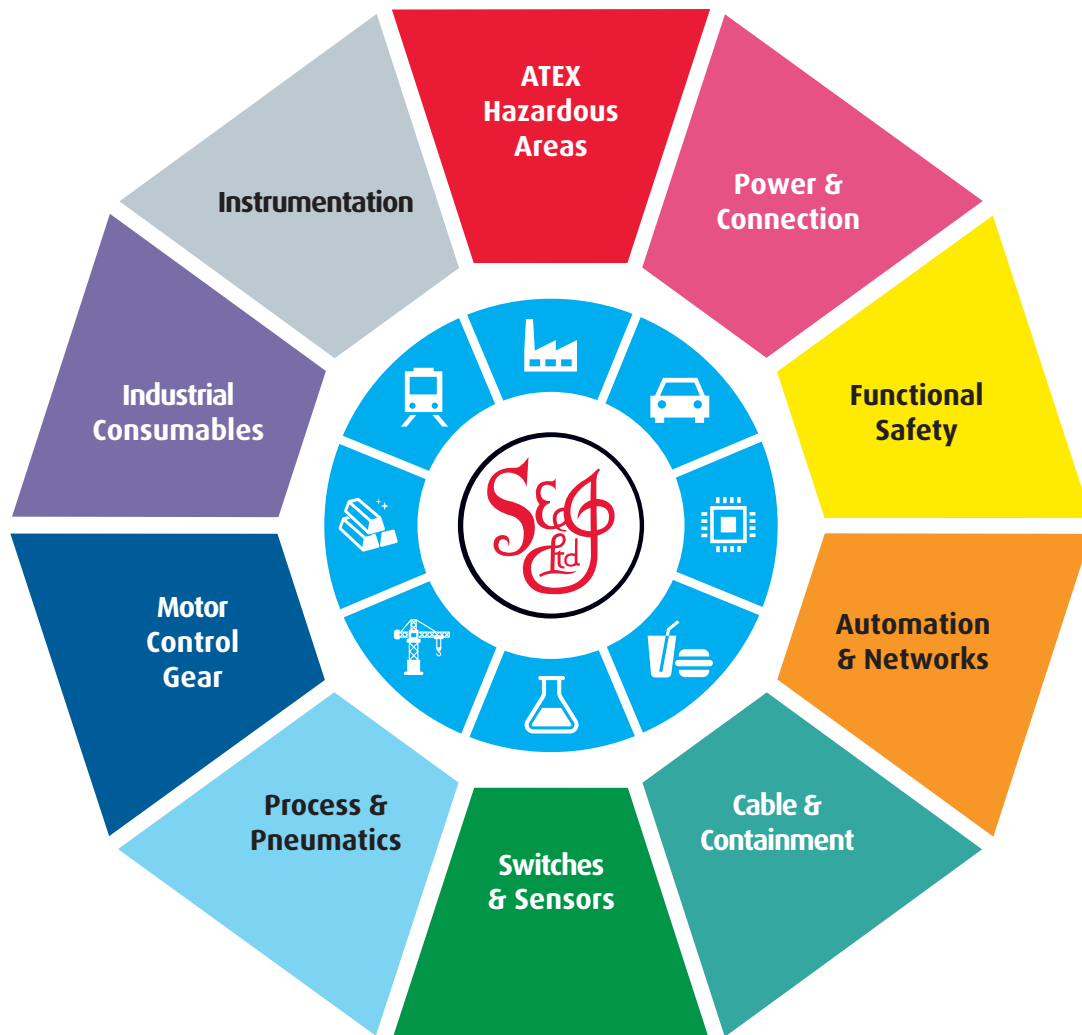

Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk