

BAO BS88 Offset bolted tags fuse links



Product description

Eaton's Bussmann® series BAO British Standard fuse links, size A3, are specifically designed for the protection of general industrial applications e.g. power distribution, cable protection, motor protection.

Standard features

- Good peak let-through current limitation
- 1:1:6 Selective coordination ratio between "minor" and "major" fuse
- Suitable for motor protection if gM type selected
- Power loss values well within the limits of IEC 60269-2



Powering Business Worldwide

Technical Data 4112

Effective October 2017

BAO BS88 Offset bolted tags fuse links

Catalogue symbol:

- BAO (Amps)

Technical data:

- Rated voltage: 500 V a.c.
- Rated current: 40 to 63 A
- Breaking capacity: 80kA
- BS reference: A3
- Breaking range and utilisation category: gG and gM

Standards/approvals:

- BS88-2
- IEC 60269-2
- Suitable for use in RoHS compliant applications

Fuse holders (ordered separately)

- CM63F (Camaster fuse holder)
- RS63H (Red Spot fuse holder)


Packaging:

- MOQ 20

Table 1. Technical data

Catalogue number	Rated voltage	Rated current (Amps)	Breaking capacity	Energy integrals I ² t (A ² S)			Watts loss (W)	Product class	Weight (grams)
				Pre-arcing	Total at 415 V a.c.	Total at 550 V a.c.			
BA040	500 V a.c.	40	80 kA at 500 V d.c.	1400	3600	5000	4.7	gG	55 g
BA050	500 V a.c.	50	80 kA at 500 V d.c.	3000	8000	11,250	4.9	gG	55 g
BA063	500 V a.c.	63	80 kA at 500 V d.c.	6700	18,850	25,100	5.6	gG	55 g
BA063M80	500 V a.c.	63M80	80 kA at 500 V d.c.	12,600	33,900	50,000	4.4	gM	55 g
BA063M100	500 V a.c.	63M100	80 kA at 500 V d.c.	24,000	72,900	90,000	3.4	gM	55 g

Dimensions - mm

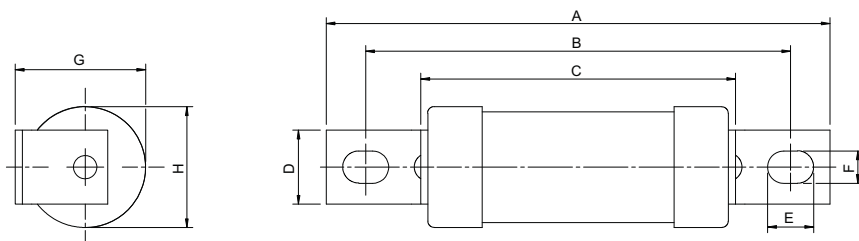


Catalogue numbers	A	B	C	D	E	F	G	H
BA040-63 and BA063M80-100	87	73	54	13	8	5.5	22	21

BAO BS88 Offset bolted tags fuse links

Technical Data 4112

Effective October 2017

Time current curve - non motor rated

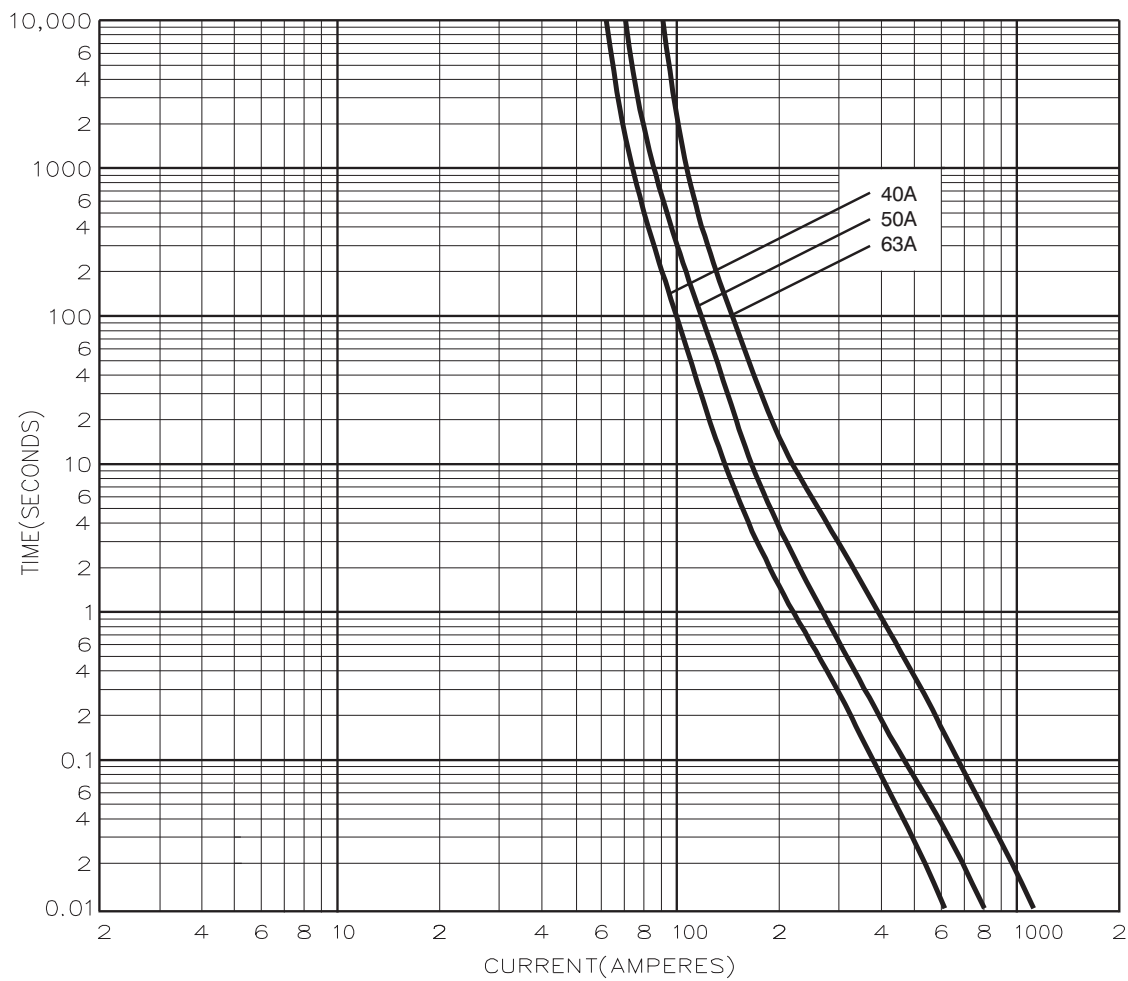


Technical Data 4112

Effective October 2017

BAO BS88 Offset bolted tags fuse links

Time current curve - motor rated

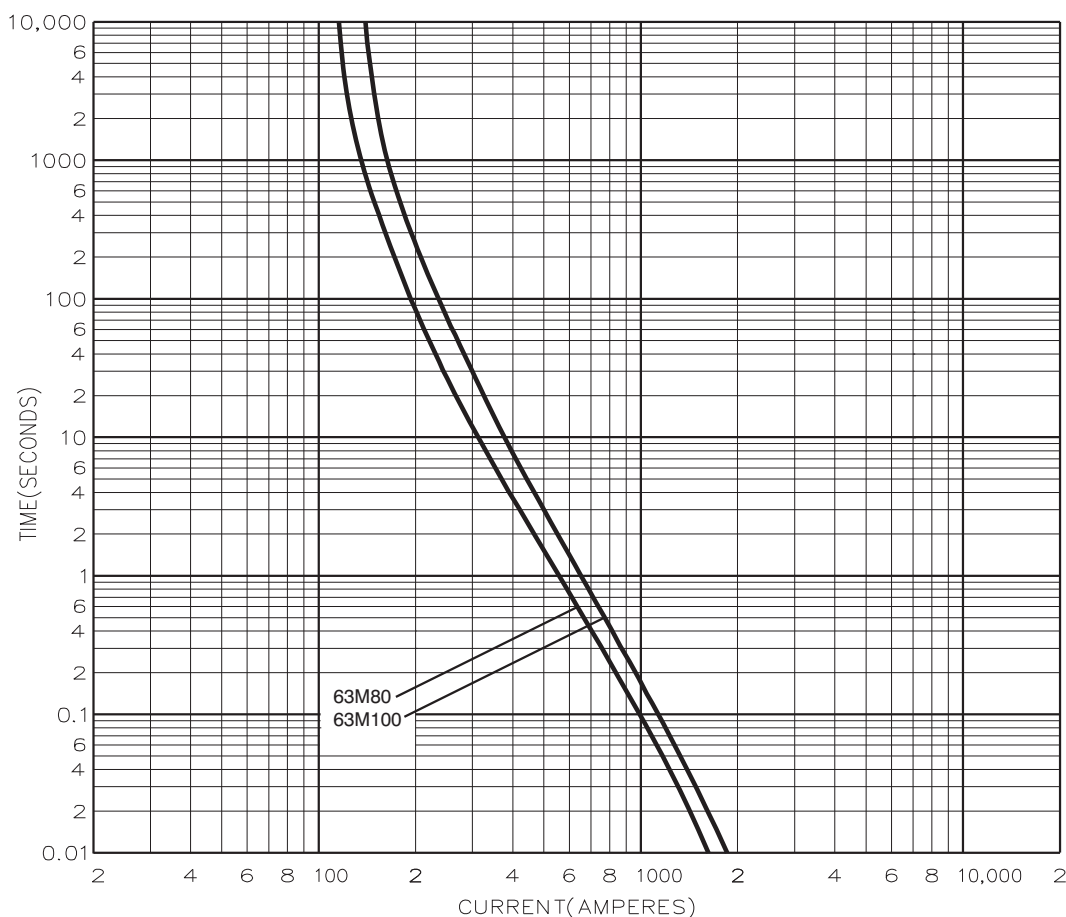

Eaton
 EMEA Headquarters
 Route de la Longeraie 7
 1110 Morges, Switzerland

Eaton Electrical Products Limited
 Melton Road
 Burton-on-the-Wolds
 Leicestershire, LE12 5TH
 United Kingdom

© 2017 Eaton
 All Rights Reserved
 PDF Only
 Publication No. 4112
 October 2017

EATON
 Powering Business Worldwide

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions. Only order confirmations and technical documentation by Eaton is binding. Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton. The same applies to Trademarks (especially Eaton, Moeller, and Cutler-Hammer). The Terms and Conditions of Eaton apply, as referenced on Eaton Internet pages and Eaton order confirmations.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS


At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.

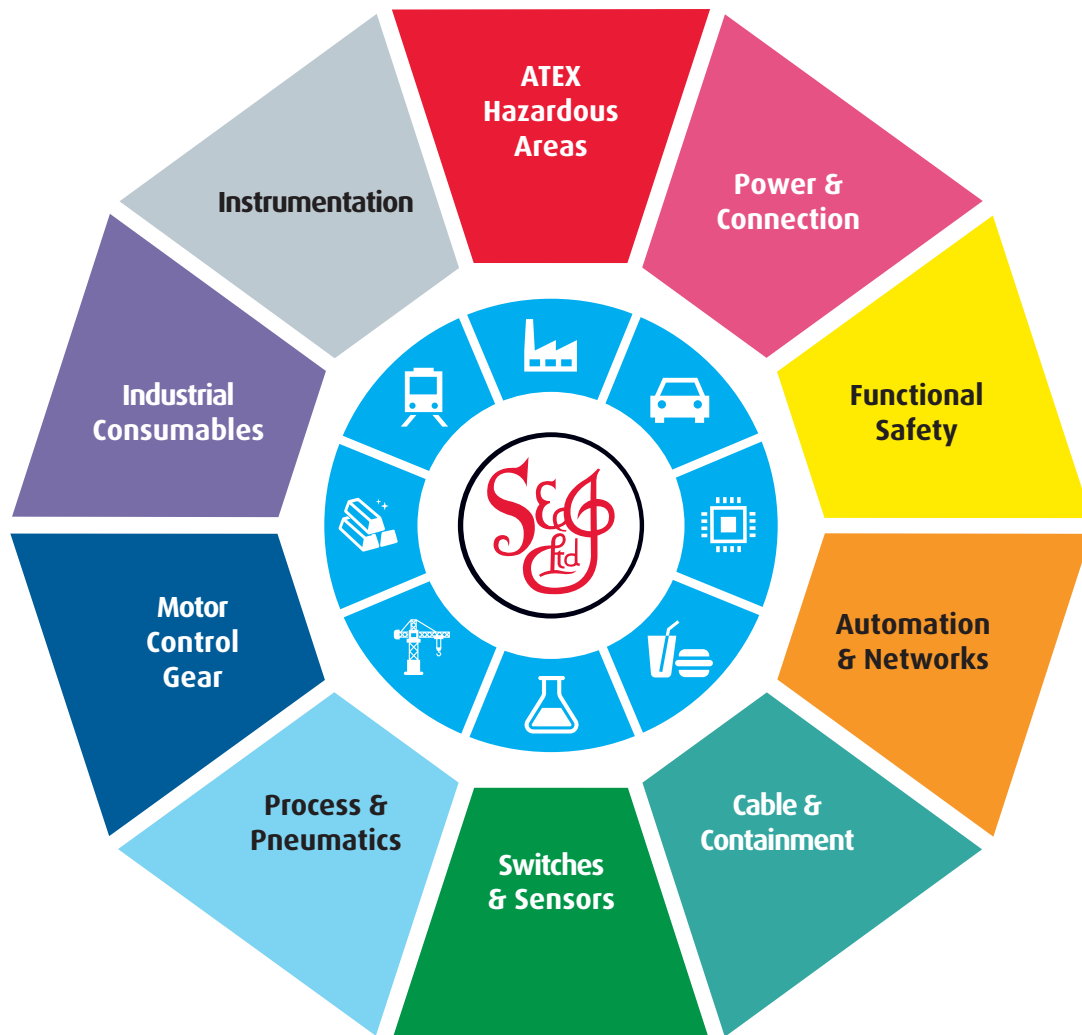

Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk