

DD Industrial HRC Fuse Links



Product description

Eaton's Bussmann® series DD British Standard fuse links, size B2, are specifically designed for the protection of general industrial applications e.g. power distribution, cable protection, motor protection.

Standard features

- Good peak let-through current limitation
- 1:1:6 Selective coordination ratio between "minor" and "major" fuse
- gG characteristics for cable protection and gM for motor protection applications
- Power loss values well within the limits of IEC 60269-2



Powering Business Worldwide

Technical Data 4118

Effective October 2017

DD Industrial HRC Fuse Links

Catalogue symbol:

- DD(Amps)

Technical data:

- Rated voltage: 415 V a.c.
- Rated current: 125 to 200 A
- Breaking capacity: 80 kA a.c.
- Breaking range and utilisation category: gG / gM

Standards/approvals:

- BS88-2
- IEC 60269-2
- Suitable for use in RoHS compliant applications


Packaging:

- MOQ 5

Table 1. Technical data

Part number	Voltage	Current rating (amps)	Energy integrals I ² t (A ² S)		Watts loss W	Product Class	Weight
			Pre-arcing	Total at 415V			
DD125	415 V a.c.	125	29.5	71	11	gG	145g
DD160	415 V a.c.	160	57	135	13	gG	145g
DD200	415 V a.c.	200	120	290	14	gG	145g
DD200M250	415 V a.c.	200M250	200	480	11	gM	145g
DD200M315	415 V a.c.	200M315	265	635	9	gM	145g

Dimensions - mm

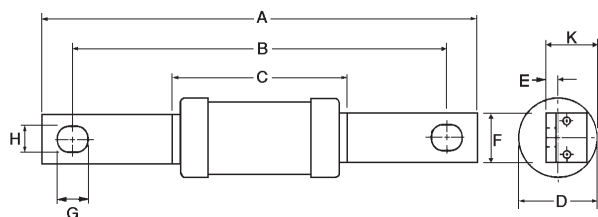


Catalogue numbers	A	B	C	D	E	F	G	H	K
DD125-200 and DD200M250-315	136	111	47	31	3.2	19	12.5	9	22.5

DD Industrial HRC Fuse Links

Technical Data **4118**

Effective October 2017

Time current curve - DD125 to DD200

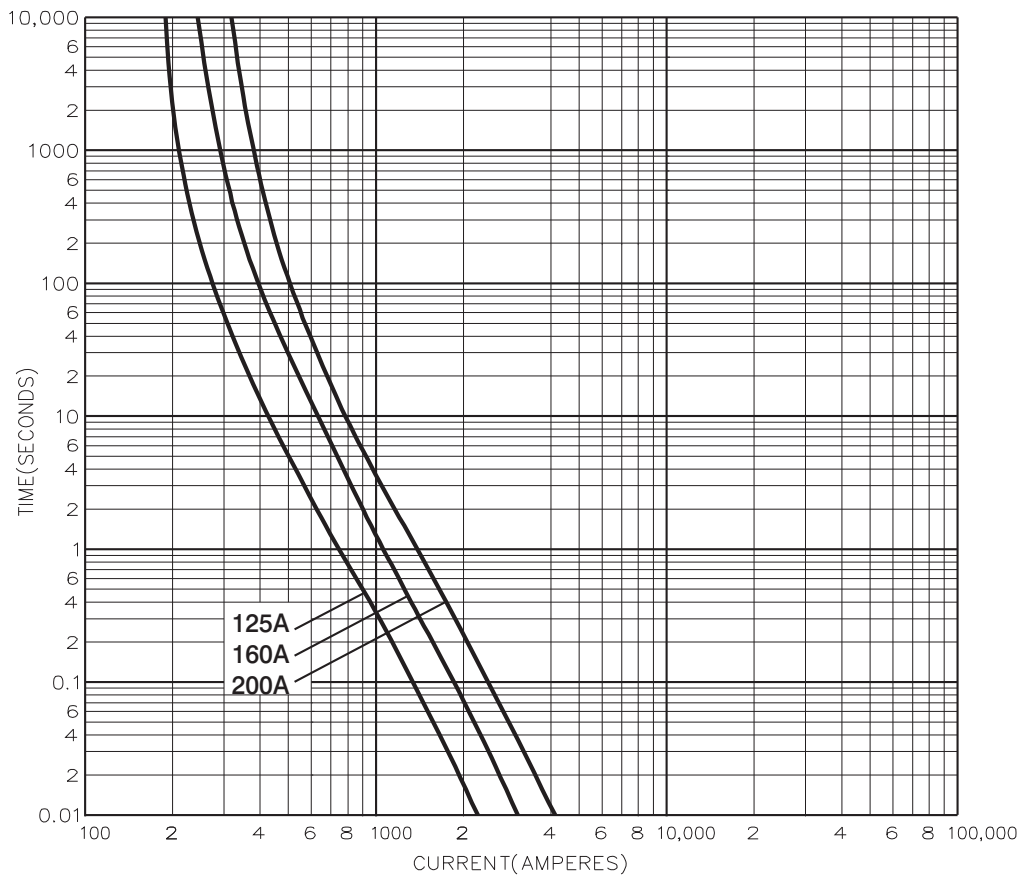


Technical Data 4118

Effective October 2017

DD Industrial HRC Fuse Links

Time current curve - DD200M

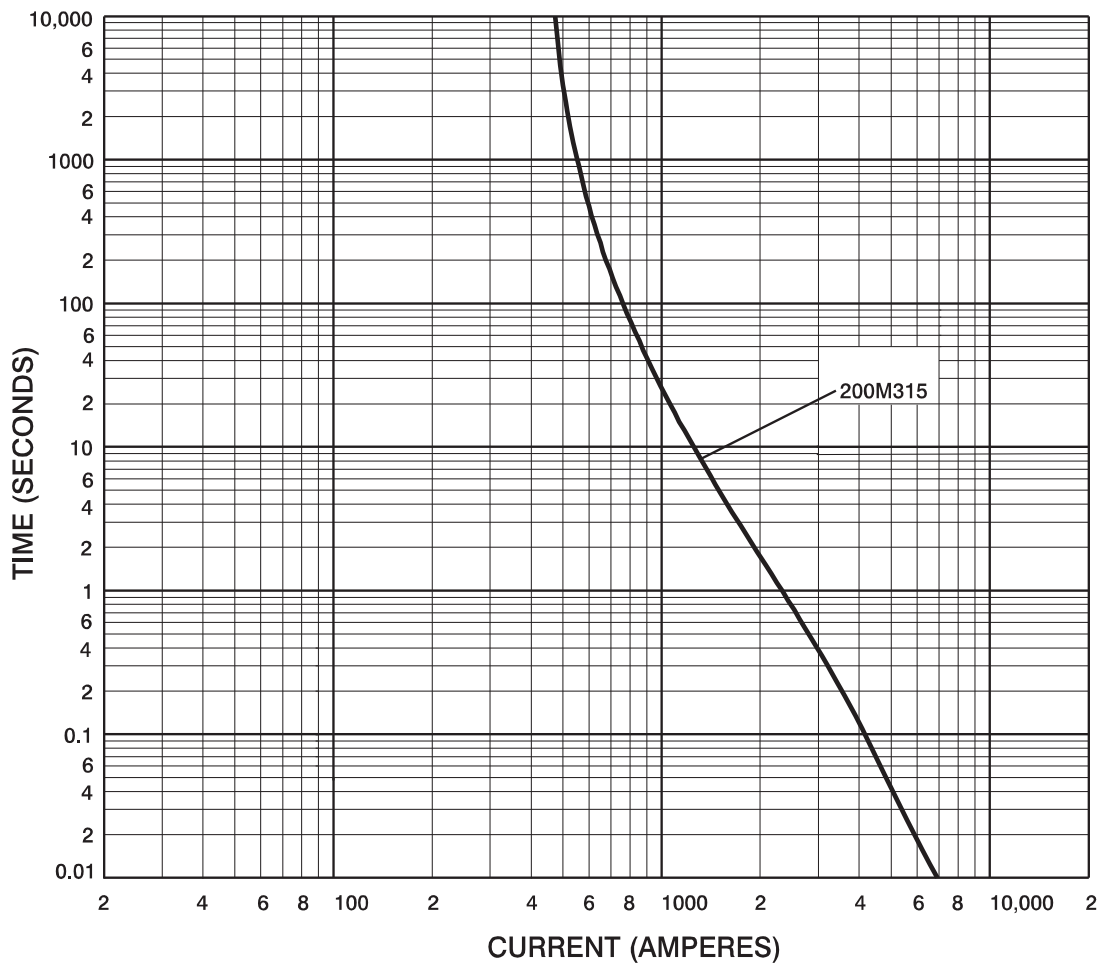

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions. Only order confirmations and technical documentation by Eaton is binding. Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton. The same applies to Trademarks (especially Eaton, Moeller, and Cutler-Hammer). The Terms and Conditions of Eaton apply, as referenced on Eaton Internet pages and Eaton order confirmations.

Eaton
 EMEA Headquarters
 Route de la Longeraie 7
 1110 Morges, Switzerland

Eaton Electrical Products Limited
 Melton Road
 Burton-on-the-Wolds
 Leicestershire, LE12 5TH
 United Kingdom

© 2017 Eaton
 All Rights Reserved
 PDF Only
 Publication No. 4118
 October 2017

EAT•N
 Powering Business Worldwide

Eaton is a registered trademark.

All other trademarks are property of their respective owners.



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS


At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.

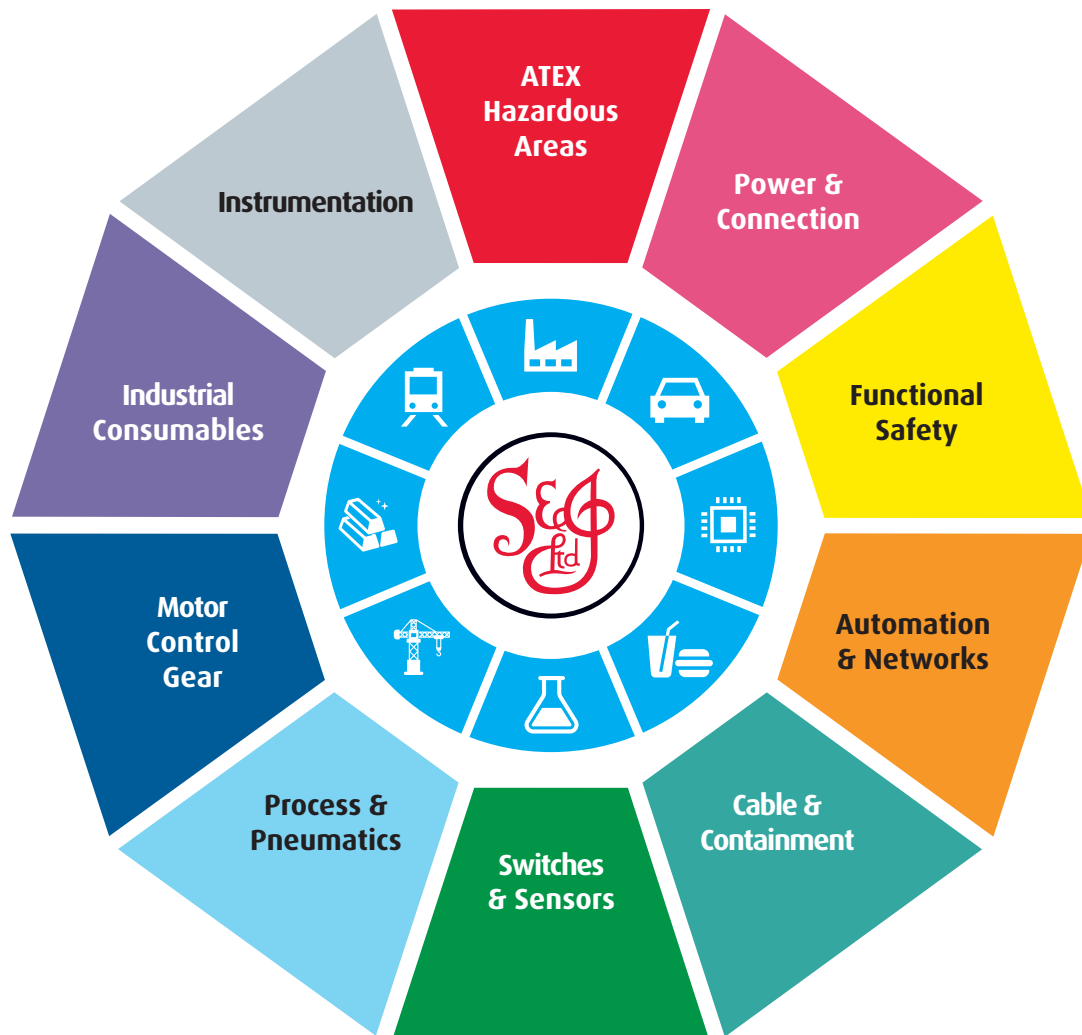

Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk