


Passive Distributor AUX, IP67



Passive Distributor AUX

Connections for 2 x AUX profile cables

- to connecting wires
- as profile cable branch

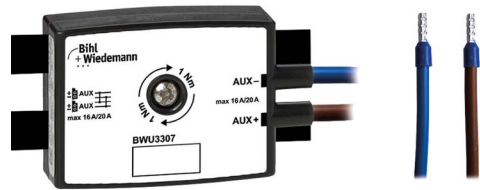

(figure similar)

Figure	Type	Flat design, montage in cable duct possible ⁽¹⁾	Internal fuse ⁽²⁾	Profile cable connection	Connection ⁽³⁾	Round cable ⁽⁴⁾	Special function	Protection category	Article no.
	IP67, 19 mm deep	yes, 19 mm deep	no	2 x AUX	2 x round cable / connecting wires 2,5 mm ²	2 m	infeed module	IP67	BWU3307
	IP67, 19 mm deep	yes, 19 mm deep	no	2 x AUX	profile cable branch	-	-	IP67	BWU3306

(1) Flat design, installation in cable duct possible

Modules with a flat housing design and with cables which exit the sides make these ideal for installation in cable ducts, cable channels, cable troughs, cable rails or cable trays. Please note the respective housing depth for your particular installation.

(2) Internal fuse

1 A, self-resetting: The internal protection is realized via self-resetting 1 A fuses for AUX. At each connection ≤1 A are available.

4 A slow-blow fuse: The internal protection is realized via 4 A slow-blow fuses for AUX U_S and AUX U_P. At each connection ≤4 A are available.

8 A slow-blow fuse: The internal protection is realized via 8 A slow-blow fuses for AUX. At each connection ≤8 A are available.

(3) Connection: further connection options are available on request.

2 x round cable / connecting wires 2,5 mm ²	profile cable branch
	 max. 16 A/20 A


(4) Cable: other cable lengths are available on request.

Passive Distributor AUX, IP67



Article No.	BWU3306		BWU3307	
Connection				
Profile cable connection	2 x AUX profile cable and piercing technology			
Connection	profile cable branch	2 x round cable / connecting wires 2,5 mm ² /AWG14		
Round cable	-	2 m		
		max. allowed tensile strain 10 N		
Operating voltage	10 ... 32 V _{DC} PELV			
Operating current	up to +50 °C	profile cable and piercing: ≤16 A with 1,5 mm ² wire section ⁽¹⁾ ≤20 A with 2,5 mm ² wire section ⁽¹⁾		
		-	≤16 A with 1,5 mm ² wire section ⁽¹⁾ ≤20 A with 2,5 mm ² wire section ⁽¹⁾ for each round cable / connecting wires	
	at +70 °C	profile cable and piercing: ≤8 A ⁽¹⁾		
		-	≤8 A ⁽¹⁾ per round cable / connecting wires	
Internal fuse	-			
Environment				
Applied standards	EN 60529 EN 61000-6-2 EN 61000-6-3			
Can be used in passively safe paths up to SIL3/PLe	yes ⁽²⁾			
Operating altitude	max. 2000 m			
Ambient temperature	-30 °C ... +50 °C (up to. +70 °C) ⁽¹⁾⁽³⁾ , no condensation permitted			
Storage temperature	-25 °C ... +85 °C			
Housing	plastic, for screw mounting, suitable for cable ducts (depth ≥19 mm)			
Pollution Degree	2			
Protection category	IP67 ⁽⁴⁾			
Maximum tolerable shock and vibration stress	≤15g, T≤11 ms 10 ... 55 Hz, 0,5 mm amplitude			
Insulation voltage	≥500 V			
Weight	75 g			
Dimensions (W / H / D) in mm	60 / 45 / 19			

(1)

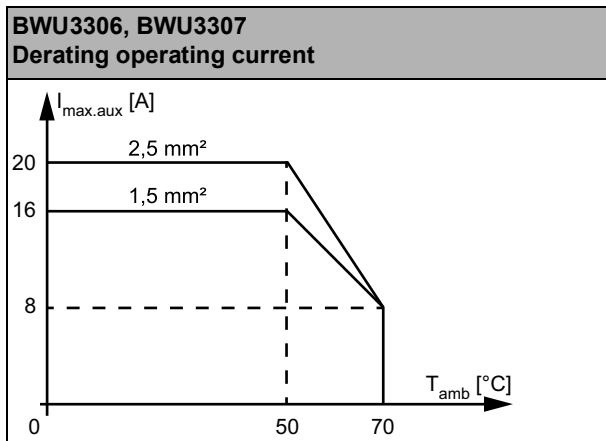

(2) The passive distributor is suitable for use in passively safe paths as it has no connection to any other potential (e.g. ASI).

(3) Down to -25 °C with flexibly mounted cable, -30 °C only with fixed mounted cable.

(4) Protection category IP67 can only be achieved, if also the cable connector fulfills IP67.

Passive Distributor AUX, IP67



	Notice
	After each opening of the module, such as after replacing a fuse, check for proper function and correct placement of the seals. Dirt, damage and/or shifting of the seals can compromise protection of the module against solid particles and liquids so that the specified protection category is no longer guaranteed.

UL-specifications (UL61010) BWU3306, BWU3307	
External protection	An isolated source with a secondary open circuit voltage of $\leq 30 V_{DC}$ with a 3 A maximum over current protection. Over current protection is not required when a Class 2 source is employed.
In general	UL mark does not provide UL certification for any functional safety rating or aspects of the above devices.

Connections: round cable/connection wires					
Article No.	connection	BN	WH	BU	BK
BWU3307	X1	-	-	AUX-	-
	X2	AUX+	-	-	-

Connections: profile cable branch	
Article No.	
BWU3306, BWU3307	<div style="display: flex; align-items: center; gap: 20px;"> <div style="text-align: center;"> max. 16 A/20 A </div> <div style="text-align: center;"> </div> <div style="text-align: center;"> </div> </div>

Accessories:

- Sealing profile IP67 (IDC plug), 60 mm (article no. BW3282)
- ASi profile cable (black) for additional auxiliary power, wire section 1,5 mm² (art. no. BW1980, BW2757)
- ASi profile cable (black) for additional auxiliary power, wire section 2,5 mm² (art. no. BW3169)



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk